

# FGG.2B.514.CYCD62

### SUMMARY

#### # Wires

8 Low voltage



Image is for illustrative purpose only

2B **Series** 

Male crimp Termination type

IP rating 50

AWG wire size 24.00 - 22.00 Cable Ø 5.30 - 6.20 mm

Status active

#### **Download**

Request a quote

Catalog

### **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FG\*: Straight plug, cable collet

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material** 

brass latch sleeve and mid pieces

Weight 30.49 g

#### **Performance**

Configuration 2B.514: 8 High Speed, Low Voltage (CAT 6A)

Insulator Y: PEEK for crimp contacts

**Rated Current** 

#### **Others**

Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C


Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

## **DRAWINGS**

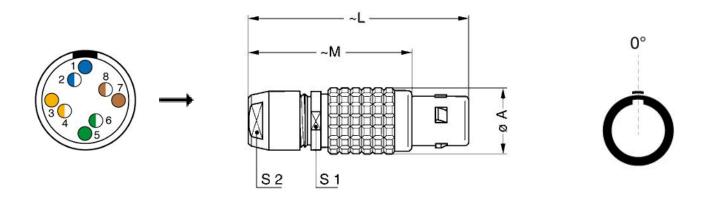

#### **Dimensions**

|     | А    | L    | М    | <b>S</b> 1 | S2   |
|-----|------|------|------|------------|------|
| mm. | 15   | 50   | 38   | 13         | 12   |
| in. | 0,59 | 1,97 | 1,50 | 0,51       | 0,47 |

# **RECOMMENDED BY LEMO**

#### **Tools**

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: <a href="DCE.91.072.BVC">DCE.91.072.BVC</a>
Extractor: <a href="DCF.91.070.2LT">DCF.91.070.2LT</a>
Replacement contact: <a href="FGG.2B.555.ZZC">FGG.2B.555.ZZC</a>
Spanner wrench: <a href="DCD.2B.025.PA120">DCD.2B.025.PA120</a>

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

| _   |    |  |
|-----|----|--|
| 1 - | 2  |  |
| \ a | 1) |  |
|     |    |  |

BFG.2B.100.PCSG

**Cables** 

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.