


**Technical Data Sheet** 

SP6T Terminated Ramses SMA 26GHz Normaly open 12Vdc Solder pins

PAG	PAGE 1/2 ISSUE 17.12		17.12.13	.13 SERIE : SPnT		PART NUMBER : <b>R574F02600</b>		
RF CI	HARACTERIS	STICS						
	Number of w Frequency ra Impedance			:	6 0 - 26.5 GHz 50 Ohms	2		
	Frequency (	GHz)	DC - 3	3 - 8	8 - 12.4	12.4 - 18	18-26.5	
	VSWR max	,	1,20	1,30	1,40	1,50	1,70	
	Insertion loss	s max	0.20 dB	0.30 dB	0.40 dB	0.50 dB	0.70 dB	
	Isolation min		80 dB	70 dB	60 dB	60 dB	50 dB	
	Average pow	/er (*)	240 W	150 W	120 W	100 W	40 W	
	TERMINATIO				50 Ohms 1 W per teri	nination / 3	W total power	
	Actuator Nominal curr Actuator volt Terminals			:	NORMALLY 250 mA 12V (10.2 to solder pins	13V) / NEG	ATIVE COMMON . / 30 sec.)	
MECH	HANICAL CH Connectors Life Switching Tin Construction	ne***	<u>TICS</u>	:	SMA female 2.000.000 c < 15 ms Splashproo	vcles per pos		
ENVI	Weight RONMENTAL	CHARACTE	ERISTICS	:	< 250 g			
	Operating te Storage tem	mperature ra	inge		-40°C to +8 -55°C to +8		ROHS	
(* (** (***	Average pow At 25° C ±10 Nominal volt	%)	er RF Path)				· COMPLIAN	

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

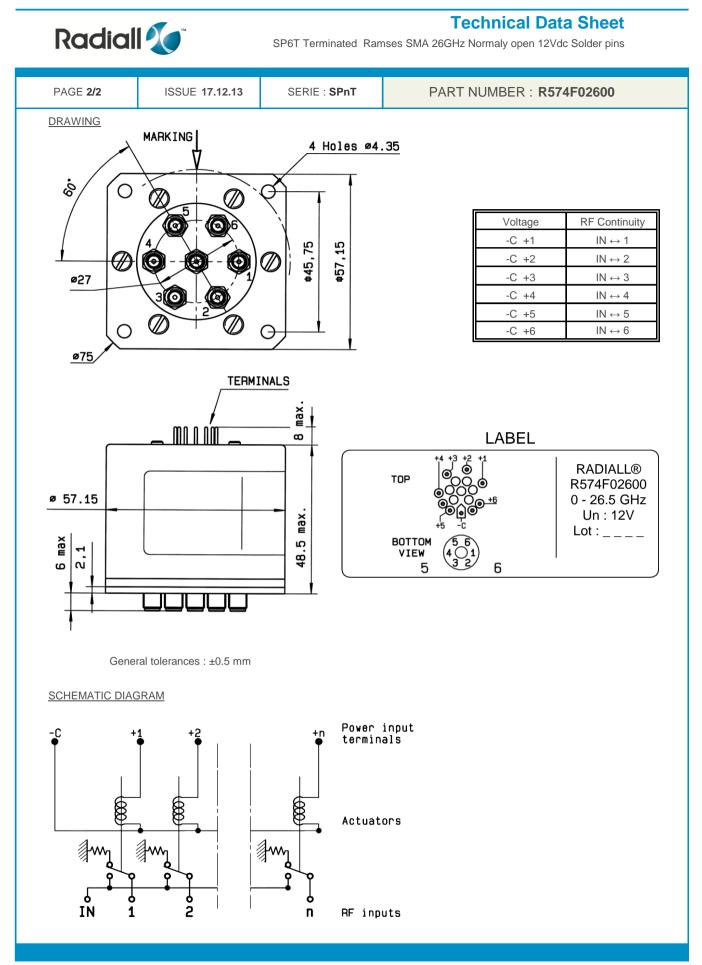

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.