### **3-Phase AC Filters / DC Filters** https://www.schurter.com /PG80

# **FMAC ECO**

### Ultra compact and efficient 1-stage filter in ECO design for 3-phase systems





### See below: Approvals and Compliances

#### Applications

- .
- Voltage rating 480 VAC for world wide acceptance
  Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
  - Suitable for use in equipment according to IEC/UL 62368-1

#### Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, Microsite

#### **Technical Data**

Description

- High attenuation value

Rated Current	16 - 150A @ Ta 40°C
Rated voltage	480 VAC, 50/60 Hz
Approval for	16 - 150A @ Ta 40 °C / 480VAC;
	50/60 Hz
Overload Current	1.5 x lr for 1 minute, per hour
Leakage Current	< 15 mA (440 V / 50 Hz)
Dielectric Strength	480 VAC:
	> 2.25 kVDC between L-L
	> 3 kVDC between L-PE
	Test voltage 2 sec
Number of Filter Stages	1-stage
Weight	1 - 7 kg
Material: Housing	Aluminum
Sealing Compound	UL 94V-0

Mounting	Screw-on mounting on chassis, upright or lengthwise
Terminal	Bolts and nuts
Operating Temperature	-25 °C to 100 °C
Climatic Category	25/100/21 acc. to IEC 60068-1
Degree of Protection	IP20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection
	class I acc. to IEC 61140
MTBF	> 200'000 h acc. to MIL-HB-217 F

### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FMAC ECO

/ ippi	noo type.	1 1 1 1 1 1	0 200		
		•			-

Approval Logo	Certificates	Certification Body	Description
10	VDE Approvals	VDE	Certificate Number: 40028851
c <b>AL</b> us	UL Approvals	UL	UL File Number: E72928

### **Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
IEC	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference
(ŲL)	Designed according to	UL 1283	Electromagnetic interference filters

## Application standards


Application standards where the product can be used


Organization	Design	Standard	Description
IEC.	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.
Compliances	blies with following Guide Lines		
Identification	Details	Initiator	Description
lacitation			
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on

			its affixing in accordance with EU Regulation 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
0	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

### Dimension [mm]


Case 1C

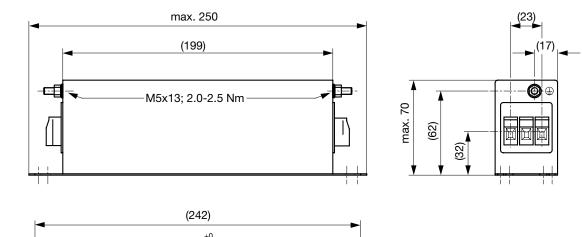

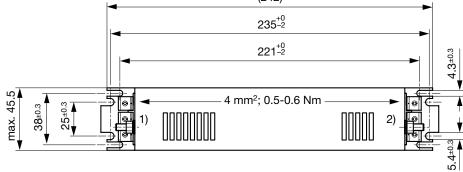



1) Line 2) Load

Case 1D-10

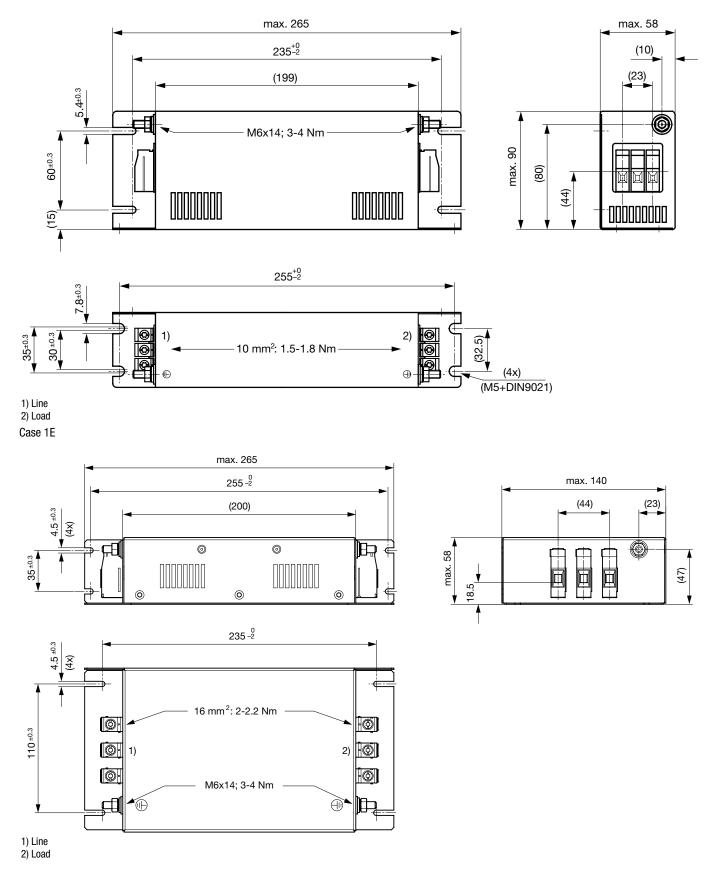

Case 1T

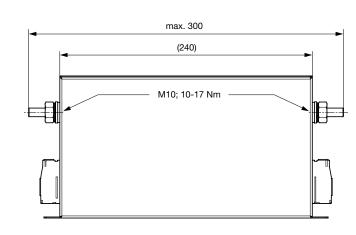





(26)

₽


E




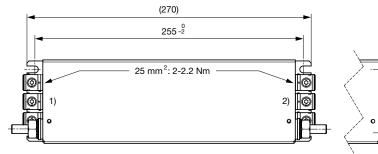






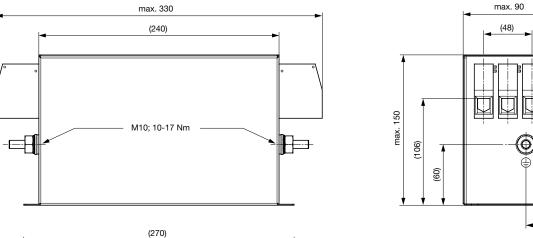

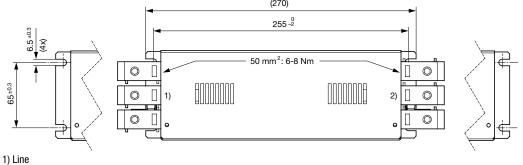




Case SF

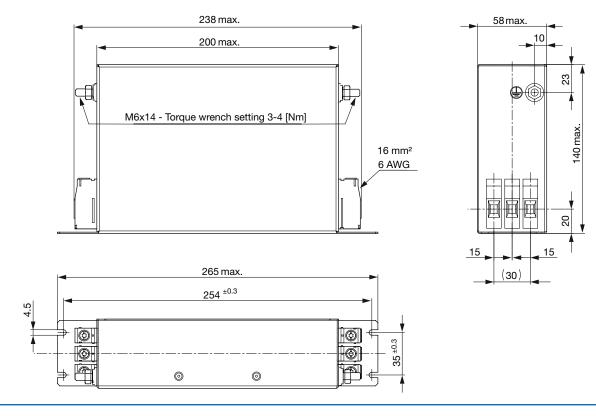

### Technical data to the filter components

Rated Current [A]	L (mH)	C1 [µF]	C2 [µF]	C3 [µF]	<b>R1 [M</b> Ω]	<b>R2 [M</b> Ω]	Filter- Type
110	0.55	6.6	6.6	3.3	1	1	Indus-
150	0.48	6.6	6.6	3.3	1	1	Indus-
16	0.55	2.2	2.2	3.3	1	1	Indus-
25	0.45	2.2	2.2	3.3	1	1	Indus-
36	0.57	2.2	2.2	3.3	1	1	Indus-
50	0.65	4.7	3.3	3.3	1	1	Indus-
55	0.75	4.7	3.3	3.3	1	1	Indus-
64	0.55	4.7	3.3	3.3	1	1	Indus-
80	0.55	4.7	4.7	3.3	1	1	Indus-

### Diagrams



1) Line 2) Load

## Attenuation Loss

dB 80

60

Industrial version

16A (FMAC-091C-1610)




60




### 50A (FMAC-091D-5010)


- - - - 50 $\Omega$  differential mode \_\_\_\_\_ 50 $\Omega$  common mode




### 55A (FMAC-091D-5510)




64A (FMAC-091E-6410)







### 150A (FMAC-091G-H210)



### **All Variants**

Rated Current @ Tu 40°C (75°C) [A]	Characteristic	Rated Voltage [VAC]	Tripped Po- wer Dissipa- tion [W]	Leakage Current [mA] @ 440V,	Contact Resistance [m $\Omega$ ]	Weight [kg]	Screw clamps [mm2] 2)	Housings	Order Number
16	High attenuation	480	6	8.9	7.6	1 kg	4	10	FMAC-091C-1610
25	High attenuation	480	8	8.9	4.1	1 kg	4	1C	FMAC-091C-2510
36	High attenuation	480	10	8.9	2.5	1.3 kg	10	1D-10	FMAC-091D-3610
50	High attenuation	480	13	10.2	1.7	1.7 kg	10	1D-10	FMAC-091D-5010
55	High attenuation	480	14	10.2	1.5	1.7 kg	10	1D-10	FMAC-091D-5510
64	High attenuation	480	17	10.2	1.4	2 kg	16	1E	FMAC-091E-6410
110	High attenuation	480	28	11.8	0.8	5.8 kg	50	1G	FMAC-091G-H110
150	High attenuation	480	40	11.8	0.6	7 kg	50	1G	FMAC-091G-H210
80	High attenuation	480	22	11.1	1.1	5.1 kg	25	1T	FMAC-091T-8010
64	High attenuation	480	17	10.2	1.4	2 kg	16	SF	FMAC-3FSF-6410

### Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

1) Leakage current according IEC 60939-1

2) Maximum conductor cross section (wire gauge) to be used; a comparative table for AWG and mm<sup>2</sup> values can be found in the general product information https://www.schurter.com/en/FAQ#10

### Packaging unit

1 Pcs

25.01.2021

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.