Ordering information

PMA15F

A 15 F

c Sus 🛕 (E **RoHS** eco Vertical terminal block Standard type with Cover Horizontal terminal block (option:-T1) (option:-T) (option:-N) Example recommended EMI/EMC filter NAM-04-000



Low leakage current type : NAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

4)Universal input ⑤Output voltage

Series name
 Single output
 Output wattage

- Optional *5
 T : Vertical terminal block
 T1: Horizontal terminal block
- N: with Cover
- J1: VH(J.S.T.)connector type

Specification is changed at option, refer to Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PMA15F-3R3	PMA15F-5	PMA15F-12	PMA15F-15	PMA15F-24
MAX OUTPUT WATTAGE[W]	9.9	15	15.6	15	16.8
DC OUTPUT	3.3V 3A	5V 3A	12V 1.3A	15V 1A	24V 0.7A


SPECIFICATIONS

	MODEL		PMA15F-3R3	PMA15F-5	PMA15F-12	PMA15F-15	PMA15F-24			
	VOLTAGE[V]		AC85 - 264 1 φ (Refe	er to the Instruction Ma	nual 1.1 and 3.2) *3	*				
Ī	OUDDENTIAL	ACIN 100V	0.30typ (lo=100%)	0.40typ (lo=100%)						
	CURRENT[A]	ACIN 200V	0.15typ (lo=100%)	0.20typ (lo=100%)						
Ī	FREQUENCY[Hz]		50 / 60 (47 - 440)							
INPUT	EFFICIENCY[%]	ACIN 100V	66typ	70typ	74typ	76typ	76typ			
	EFFICIENCY[%]	ACIN 200V	67typ	74typ	78typ	79typ	79typ			
	INRUSH CURRENT[A]	ACIN 100V	15typ (lo=100%) (At cold start)							
	ACIN 200V		30typ (lo=100%) (At cold start)							
	LEAKAGE CURREN	T[mA]	0.05/0.10max (ACIN 100V / 240V 60Hz, lo=100%, According to IEC60601-1)							
	VOLTAGE[V]		3.3	5	12	15	24			
	CURRENT[A]		3.0	3.0	1.3	1.0	0.7			
	LINE REGULATION[mV]	20max	20max	48max	60max	96max			
	LOAD REGULATION[mV]		40max	40max	100max	120max	150max			
	RIPPLE[mVp-p]	0 to +50°C	80max	80max	120max	120max	120max			
	*1	-10 - 0℃	140max	140max	160max	160max	160max			
	RIPPLE NOISE[mVp-p]	0 to +50°C	120max	120max	150max	150max	150max			
OUTPUT	*1	-10 - 0℃	160max	160max	180max	180max	180max			
	TEMPERATURE REGULATION[mV]	0 to +50°C	50max	50max	120max	150max	240max			
	TEMPENATURE REGULATION[IIV]	-10 to +50°C	60max	60max	150max	180max	290max			
	DRIFT[mV]	*2	20max	20max	48max	60max	96max			
	START-UP TIME[ms]		200typ (ACIN 100V, Io=10	00%) *Start-up time is 700	ms typ for less than 1minut	e of applying input again fro	m turning off the input voltag			
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)							
	OUTPUT VOLTAGE ADJUSTMENT	RANGE[V]	2.85 to 3.60	4.50 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00			
	OUTPUT VOLTAGE SET		3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96			
PROTECTION	OVERCURRENT PROT	ECTION	Works over 105% of a	rating and recovers aut						
PROTECTION CIRCUIT AND	OVERVOLTAGE PROTE	CTION[V]	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00			
OTHERS	OPERATING INDICA	TION	LED (Green)							
	REMOTE ON/OFF		Not provided							
	INPUT-OUTPUT			Cutoff current = 10mA,						
ISOLATION	INPUT-FG			Cutoff current = 10mA,						
	OUTPUT-FG			toff current = 25mA, Do						
	OPERATING TEMP., HUMID. AND			%RH (Non condensing	,, , , ,	<u></u>				
ENVIRONMENT	STORAGE TEMP., HUMID. AND	ALTITUDE		%RH (Non condensing	, , , , , , , , , , , , , , , , , , , ,	<u> </u>				
	VIBRATION	-	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT		· /·	ns, once each X, Y and						
SAFETY AND	AGENCY APPROVAL			SA-C22.2 No.601.1), E						
NOISE	CONDUCTED NOISE		Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B							
REGULATIONS	HARMONIC ATTENU			000-3-2 (Class A) *6 (N						
OTHERS	CASE SIZE/WEIGHT		•	2×3.07×4.06 inches]	(W×H×D) / 230g ma	ax (with cover : 265g m	ax)			
= : / · = · · ·	COOLING METHOD		Convection							

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 Derating is required.
- When two or more units are used, they may not comply with the harmonic attenuator. Please contact us for details.
- Please contact us about safety approvals for the model with option.
- Please contact us about another class.
- Parallel operation with other model is not possible.
 - Derating is required when operated with cover. A sound may occur from power supply at peak loading.


PMA15F | COSEL

Block diagram

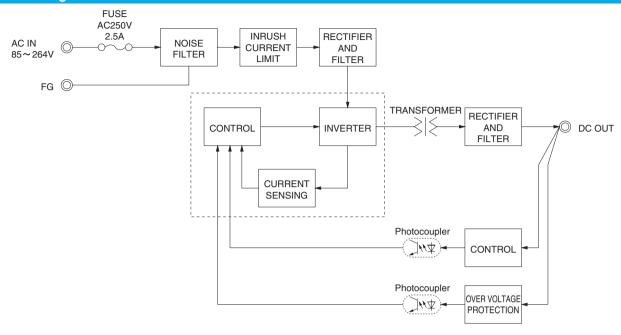

External view

* External size of option T,T1 and N is different from standard model and refer to 4 Option of instruction manual for details.

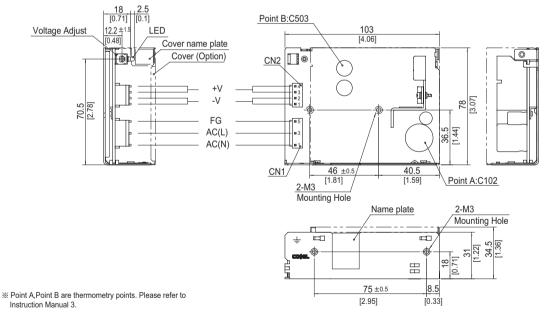

Instruction Manual 3.

1/0	O Connector	Mating Connector	Terminal		
ONIA	1-1123724-3	1-1123722-5	Chain	1123721-1	
CNT	1-1123724-3	1-1123722-5	Loose	1318912-1	
ONIO	1-1123723-4	1-1123722-4	Chain	1123721-1	
CN2	1-1123723-4	1-1123722-4	Loose	1318912-1	

(Mfr : Tyco Electronics AMP)

- % I/O Connector is Mfr.Tyco Electronics AMP % Option : -J1 : (J.S.T) connector type -T : Vertical terminal block type
- - -T1 : Horizontal terminal block type

Refer to Instruction Manual 4.

<PIN CONNECTION>

CN1		CN2	
Pin No.	Input	Pin No.	Output
1	AC(N)	1, 2	-V
2		1, 2	-v
3	AC(L)	3, 4	+V
4		3,4	_ TV
5	FG		


- % Tolerance : ±1 [±0.04]
- * Weight: 230g max (with cover: 265g max)
- ※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
- $\ensuremath{\ensuremath{\%}}$ Chassis material : Electric galvanizing steel board
- $\ensuremath{\mathbb{X}}$ Keep drawing current per pin bellow 5A of CN2.

- Dimensions in mm, []=inches
 Mounting torque : 0.6N · m (6.3kgf · cm) max
 Please connect safety ground to the unit in 2-M3 holes.

Ordering information

PMA30F

30

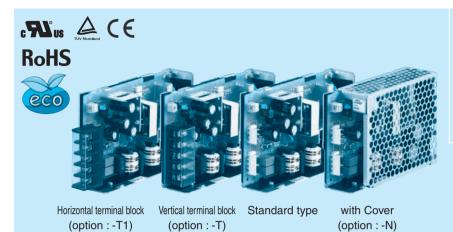

Example recommended EMI/EMC filter NAM-04-000



Low leakage current type : NAM series *A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- Series name
 Single output
 Output wattage
- 4)Universal input
- ⑤Output voltage
- Optional *5
 T : Vertical terminal block
 T1: Horizontal terminal block
- N: with Cover
- J1: VH(J.S.T.)connector type

Specification is changed at option, refer to Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PMA30F-3R3	PMA30F-5	PMA30F-12	PMA30F-15	PMA30F-24
MAX OUTPUT WATTAGE[W]	19.8	30	30	30	31.2
DC OUTPUT	3.3V 6A	5V 6A	12V 2.5A	15V 2A	24V 1.3A

SPECIFICATIONS


	MODEL		PMA30F-3R3	PMA30F-5	PMA30F-12	PMA30F-15	PMA30F-24			
	VOLTAGE[V]		AC85 - 264 1 φ (Refe	er to the Instruction Mar	nual 1.1 and 3.2) *3	·	,			
	OUDDENITAL	ACIN 100V	0.50typ (lo=100%)	0.70typ (lo=100%)						
	CURRENT[A]	ACIN 200V	0.30typ (lo=100%) 0.40typ (lo=100%)							
	FREQUENCY[Hz]		50 / 60 (47 - 440)							
INPUT	EFFICIENCY[%]	ACIN 100V	67typ	71typ	76typ	77typ	77typ			
	EFFICIENCY[%]	ACIN 200V	69typ	74typ	78typ	80typ	80typ			
	INRUSH CURRENT[A]	ACIN 100V	15typ (lo=100%) (At cold start)							
	ACIN 200V		30typ (lo=100%) (At cold start)							
	LEAKAGE CURREN	T[mA]	0.05 / 0.10max (ACIN	1 100V / 240V 60Hz, Id	=100%, According to	IEC60601-1)				
	VOLTAGE[V]		3.3	5	12	15	24			
	CURRENT[A]		6.0	6.0	2.5	2.0	1.3			
	LINE REGULATION[mV]		20max	20max	48max	60max	96max			
	LOAD REGULATION[mV]		40max	40max	100max	120max	150max			
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	120max			
	*1	-10 - 0℃	140max	140max	160max	160max	160max			
	RIPPLE NOISE[mVp-p]	0 to +50℃	120max	120max	150max	150max	150max			
OUTPUT	*1	-10 - 0℃	160max	160max	180max	180max	180max			
L	TEMPERATURE REGULATION[mV]	0 to +50°C	50max	50max	120max	150max	240max			
	TEMPERATURE REGULATION[IIIV]	-10 to +50°C	60max	60max	150max	180max	290max			
	DRIFT[mV]	*2	20max	20max	48max	60max	96max			
	START-UP TIME[ms]		200typ (ACIN 100V, Io=10	00%) *Start-up time is 700	ms typ for less than 1minu	te of applying input again fro	om turning off the input voltag			
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)							
	OUTPUT VOLTAGE ADJUSTMENT	RANGE[V]	2.85 to 3.60	4.50 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00			
	OUTPUT VOLTAGE SET	TING[V]	3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96			
DDOTECTION	OVERCURRENT PROT	ECTION		rating and recovers aut						
PROTECTION CIRCUIT AND	OVERVOLTAGE PROTEC	CTION[V]	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00			
OTHERS	OPERATING INDICA	TION	LED (Green)							
	REMOTE ON/OFF		Not provided							
	INPUT-OUTPUT			Cutoff current = 10mA, I						
ISOLATION	INPUT-FG		AC2,000V 1minute, C	Cutoff current = 10mA, I	DC500V 50M Ω min ($ extit{A}$	At Room Temperature)				
	OUTPUT-FG			toff current = 25mA, DO						
	OPERATING TEMP., HUMID. AND	ALTITUDE		%RH (Non condensing	,, , , , ,					
ENVIRONMENT	STORAGE TEMP., HUMID. AND	ALTITUDE		%RH (Non condensing	, , , , , , , , , , , , , , , , , , ,					
LIVIIIONIVILIVI	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, (60minutes each along	X, Y and Z axis				
	IMPACT		· /·	ns, once each X, Y and						
SAFETY AND	AGENCY APPROVAL			SA-C22.2 No.601.1), E						
NOISE	CONDUCTED NOISE		<u> </u>	, VCCI-B, CISPR11-B,						
REGULATIONS	HARMONIC ATTENU	JATOR		000-3-2 (Class A) *6 (N						
OTHERS	CASE SIZE/WEIGHT		31×82×120mm [1.2	2×3.23×4.72 inches]	(WXHXD) / 240g m	ax (with cover : 280g m	nax)			
UTTERS	COOLING METHOD		Convection							

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 Derating is required.
- *4 When two or more units are used, they may not comply with the harmonic attenuator. Please contact us for details.
- Please contact us about safety approvals for the model with option.
- Please contact us about another class.
- Parallel operation with other model is not possible. Derating is required when operated with cover.
- A sound may occur from power supply at peak loading.

PMA-4




Block diagram

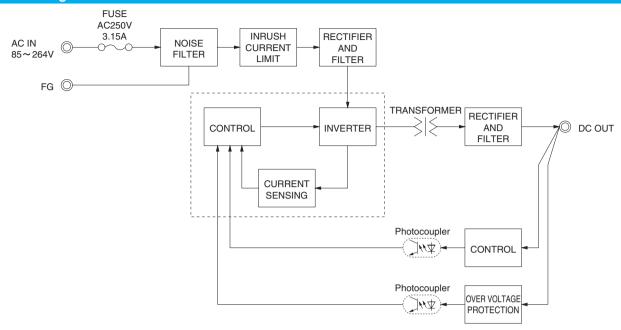

External view

** External size of option T,T1 and N is different from standard model and refer to 4 Option of instruction manual for details.

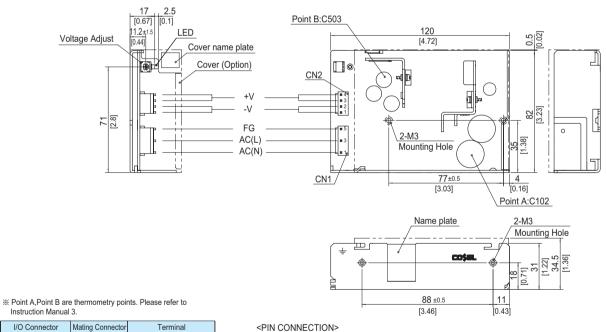

Instruction Manual 3.

I/C	O Connector	Mating Connector	Terminal				
CNIA	N1 1-1123724-3	1-1123722-5	Chain	1123721-1			
CIVI		1-1123722-5	Loose	1318912-1			
CNIO	1-1123723-4	4 4400700 4	Chain	1123721-1			
CNZ	1-1123723-4	1-1123722-4	Loose	1318912-1			
(Mfr : Tyco Electronics AMP)							

- ** I/O Connector is Mfr.Tyco Electronics AMP
 ** Option: -J1: (J.S.T) connector type
 -T: Vertical terminal block type

		ai toiriiiridi k	
-1	T1 : Horizo	ntal termina	al block type
Refer to In	struction N	/lanual 4.	

CN1		CN2	
Pin No.	Input	Pin No.	Output
1	AC(N)	4.0	-V
2		1, 2	-v
3	AC(L)	2.4	+\/
4		3, 4	+v
-	FG		

- ※ Tolerance : ±1 [±0.04]
- Weight: 240g max (with cover: 280g max)
- ※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
 ※ Chassis material : Aluminum
- Keep drawing current per pin bellow 5A of CN2.
 Dimensions in mm, []=inches
- Mounting torque : 0.49N ⋅ m (5kgf ⋅ cm) max
- * Please connect safety ground to the unit in 2-M3 holes.

PMA60F

Ordering information

PM

DMACOE 10

60

c**91**°us △ (€ **RoHS** eco Horizontal terminal block Vertical terminal block Standard type with Cover (option:-T1) (option:-T) (option:-N)

DMACOE 2D2

Example recommended EMI/EMC filter NAM-04-000

Low leakage current type : NAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected

DMACOE 15

in parallel with the power supply.

 Series name
 Single output
 Output wattage 4)Universal input

⑤Output voltage

Optional *5
 T : Vertical terminal block
 T1: Horizontal terminal block

N: with Cover

J1: VH(J.S.T.)connector type R: with Remote ON/OFF

Specification is changed at option, refer to Instruction Manual.

DMACOE 04

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

DMACOE E

MODEL	PMA60F-3R3	PMA60F-5	PMA60F-12	PMA60F-15	PMA60F-24
MAX OUTPUT WATTAGE[W]	39.6	60	60	60	60
DC OUTPUT	3.3V 12A	5V 12A	12V 5A	15V 4A	24V 2.5A

SPECIFICATIONS

MODEL


	MODEL		PMA60F-3R3	PMA60F-5	PMA60F-12	PMA60F-15	PMA60F-24				
	VOLTAGE[V]		AC85 - 264 1 φ (Refer	r to the Instruction Man	ual 1.1)						
	CURRENT[A]	ACIN 100V	0.7typ (lo=100%)	0.8typ (lo=100%)							
	CONNENT[A]	ACIN 200V	0.4typ (lo=100%)	0.5typ (lo=100%)							
	FREQUENCY[Hz]		50 / 60 (47 - 63)								
	EFFICIENCY[%]	ACIN 100V	77typ	80typ	80typ	81typ	81typ				
NPUT	EFFICIENCY[%]	ACIN 200V	78typ	83typ	82typ	83typ	83typ				
	POWER FACTOR	ACIN 100V	0.98typ								
	(lo=100%)	ACIN 200V	0.85typ 0.90typ								
	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start)								
	INNOSTI CONNENT[A]	ACIN 200V	30typ (Io=100%) (At cold start)								
	LEAKAGE CURRENT[mA]		0.09 / 0.18max (ACIN	100V / 240V 60Hz, lo	=100%, According to IE	C60601-1)					
	VOLTAGE[V]		3.3	5	12	15	24				
	CURRENT[A]		12.0	12.0	5.0	4.0	2.5				
	LINE REGULATION[20max	20max	48max	60max	96max				
	LOAD REGULATION		40max	40max	100max	120max	150max				
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	120max				
	*1		140max	140max	160max	160max	160max				
	RIPPLE NOISE[mVp-p]	0 to +50°C	120max	120max	150max	150max	150max				
OUTPUT	*1	-10 - 0℃	160max	160max	180max	180max	180max				
	TEMPERATURE REGULATION[mV]	0 to +50°C	50max	50max	120max	150max	240max				
		-10 to +50°C	60max	60max	150max	180max	290max				
	DRIFT[mV]	*2	20max	20max	48max	60max	96max				
	START-UP TIME[ms]		250typ (ACIN 100V, Io=100%)								
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)								
	OUTPUT VOLTAGE ADJUSTMENT	RANGE[V]	2.85 to 3.60	4.50 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00				
	OUTPUT VOLTAGE SET	TING[V]	3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96				
DOTECTION	OVERCURRENT PROT	ECTION	Works over 105% of ra	ating and recovers auto	matically						
ROTECTION IRCUIT AND	OVERVOLTAGE PROTE		4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00				
THERS	OPERATING INDICA	TION	LED (Green)								
	REMOTE ON/OFF		Optional (Required ex								
	INPUT-OUTPUT-RC	*3			C500V 50M Ω min (At						
SOLATION	INPUT-FG			· · · · · · · · · · · · · · · · · · ·	C500V 50M Ω min (At						
	OUTPUT-RC-FG	*3			500V 50MΩ min (At R						
	OPERATING TEMP., HUMID. AND		,		, 3,000m (10,000feet) r						
NVIRONMENT	STORAGE TEMP., HUMID. AND	ALTITUDE			, 9,000m (30,000feet) r						
	VIBRATION		, ,	,, <u> </u>	Ominutes each along X	, Y and Z axis					
	IMPACT	1	. ,,	s, once each X, Y and							
AFETY AND	AGENCY APPROVAL		, ,	A-C22.2 No.601.1), EN							
OISE	CONDUCTED NOISE		_ '	·	CISPR22-B, EN55011-	B, EN55022-B					
EGULATIONS	HARMONIC ATTENU		Complies with IEC610								
OTHERS	CASE SIZE/WEIGHT		•	6×3.23×5.31 inches]	(W×H×D) / 350g max	(with cover : 395g max	()				
	COOLING METHOD		Convection								

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- Applicable when Remote ON/OFF (optional) is added. RC is insulated with input, output and FG.
- Derating is required.
- Please contact us about safety approvals for the model with option.

- *6 Please contact us about class C.
- Parallel operation with other model is not possible.
- Derating is required when operated with cover
- A sound may occur from power supply at peak loading.




Block diagram

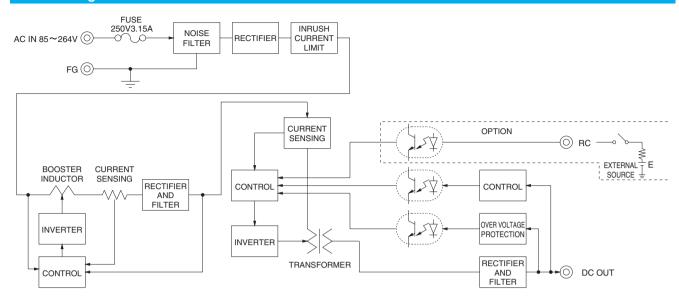

External view

* External size of option T,T1,R and N is different from standard model and refer to 4 Option of instruction manual for details.

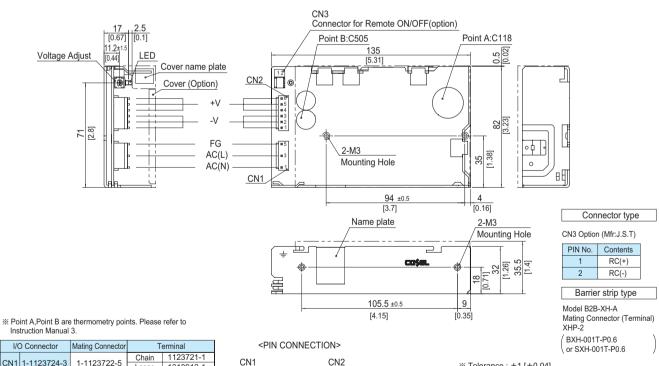

Instruction Manual 3.

I/O Connector		Mating Connector	Terminal	
014	1-1123724-3	1-1123722-5	Chain	1123721-1
CNT	1-1123724-3	1-1123722-5	Loose	1318912-1
0110	4 4400700 0	1-1123722-6	Chain	1123721-1
CNZ	1-1123723-6		Loose	1318912-1

(Mfr : Tyco Electronics AMP)

- * I/O Connector is Mfr.Tyco Electronics AMP
- Option : -J1 : (J.S.T) connector type
 -T : Vertical terminal block type
- -T1 : Horizontal terminal block type Refer to Instruction Manual 4.

Pin No.	Input
1	AC(N)
2	
3	AC(L)

FG


0.12					
Pin No.	Output				
1 - 3	-V				
4 - 6	+V				

- ※ Tolerance: ±1 [±0.04]
- Weight: 350g max (with cover: 395g max)
- ※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
- ※ Chassis material : Aluminum

- ※ Dimensions in mm, []=inches
 ※ Mounting torque : 0.49N ⋅ m (5kgf ⋅ cm) max
- $\ensuremath{\ensuremath{\%}}$ Please connect safety ground to the unit in 2-M3 holes.

PMA100F

100 **PM**

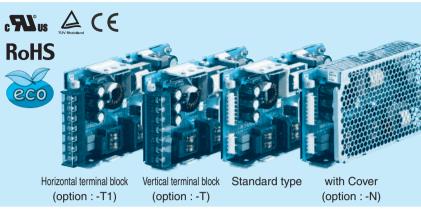

Example recommended EMI/EMC filter NAM-06-000

Low leakage current type : NAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected

in parallel with the power supply.

Series name
 Single output
 Output wattage

4)Universal input

⑤Output voltage

Optional *5
 T : Vertical terminal block
 T1: Horizontal terminal block

N: with Cover

J1: VH(J.S.T.)connector type R: with Remote ON/OFF

Specification is changed at option, refer to Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PMA100F-3R3	PMA100F-5	PMA100F-12	PMA100F-24	PMA100F-48
MAX OUTPUT WATTAGE[W]	66	100	102	108	100.8
DC OUTPUT	3.3V 20A	5V 20A	12V 8.5A	24V 4.5A	48V 2.1A

SPECIFICATIONS


	MODEL		PMA100F-3R3	PMA100F-5	PMA100F-12	PMA100F-24	PMA100F-48	
	VOLTAGE[V]		AC85 - 264 1 φ (Refer to the Instruction Manual 1.1)					
	OUDDENTIAL	ACIN 100V	0.9typ (lo=100%)					
	CURRENT[A]	ACIN 200V	0.5typ (lo=100%)	.5typ (lo=100%) 0.7typ (lo=100%)				
	FREQUENCY[Hz]		50 / 60 (47 - 63)					
	EFFICIENCY[9/1	ACIN 100V	77typ	81typ	82typ	84typ	84typ	
IPUT	EFFICIENCY[%]	ACIN 200V	78typ	83typ	83typ	86typ	86typ	
	POWER FACTOR	ACIN 100V	0.98typ					
	(lo=100%)	ACIN 200V	0.85typ	0.90typ				
	INRUSH CURRENT[A]	ACIN 100V	20typ (lo=100%) (At cold start)					
	INHUSH CURRENT[A]	ACIN 200V	40typ (lo=100%) (At cold start)					
	LEAKAGE CURRENT[mA]		0.09 / 0.18max (ACIN 100V / 240V 60Hz, lo=100%, According to IEC60601-1)					
	VOLTAGE[V]		3.3	5	12	24	48	
	CURRENT[A]		20.0	20.0	8.5	4.5	2.1	
	LINE REGULATION[mV]	20max	20max	48max	96max	192max	
	LOAD REGULATION		40max	40max	100max	150max	240max	
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	150max	
	*1	-10 - 0℃	140max	140max	160max	160max	200max	
	RIPPLE NOISE[mVp-p]	0 to +50℃	120max	120max	150max	150max	250max	
UTPUT	*1	-10 - 0℃	160max	160max	180max	180max	300max	
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	50max	120max	240max	480max	
	TEMPERATURE REGULATION[IIIV]	-10 to +50°C	60max	60max	150max	290max	600max	
	DRIFT[mV]	*2	20max	20max	48max	96max	192max	
	START-UP TIME[ms]		250typ (ACIN 100V, Io=100%)					
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=	=100%)				
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		2.85 to 3.60	4.50 to 5.50	10.00 to 13.20	19.20 to 27.00	39.00 to 53.00	
	OUTPUT VOLTAGE SETTING[V]		3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	24.00 to 24.96	48.00 to 49.92	
DOTEOTION	OVERCURRENT PROTECTION			ks over 105% of rating and recovers automatically				
ROTECTION ROTECTION	OVERVOLTAGE PROTEC	CTION[V]	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	30.00 to 37.00	58.00 to 65.00	
THERS	OPERATING INDICATION		LED (Green)					
			Optional (Required external power source)					
	INPUT-OUTPUT-RC	*3	,	Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)				
OLATION			AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)					
				00V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)				
	OPERATING TEMP., HUMID. AND			0%RH (Non condensing), 3,000m (10,000feet) max *4				
VIRONMENT	,		-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max					
	VIBRATION		, ,	2G), 3minutes period, 60minutes each along X, Y and Z axis				
				ns, once each X, Y and Z axis				
AFETY AND			UL60601-1, C-UL (CSA-C22.2 No.601.1), EN60601-1					
OISE	CONDUCTED NOISE		Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B					
EGULATIONS	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 *6					
THERS	CASE SIZE/WEIGHT			34×93×168mm [1.34×3.66×6.61 inches] (W×H×D) / 560g max (with cover : 625g max)				
	COOLING METHOD		Convection					

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- Applicable when Remote ON/OFF (optional) is added. RC is insulated with input, output and FG.
- Derating is required.
 Please contact us about safety approvals for the model with option.

- Please contact us about class C.
- Parallel operation with other model is not possible.
- Derating is required when operated with cover
- A sound may occur from power supply at peak loading.




Block diagram

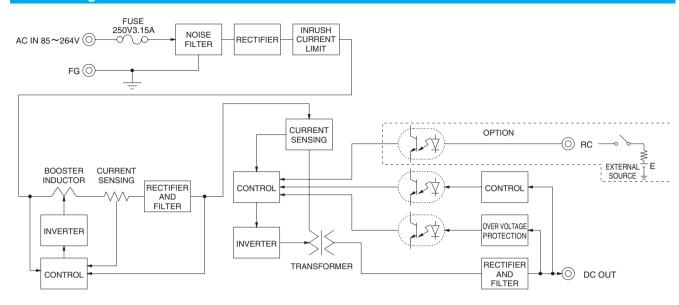

External view

** External size of option T,T1,R and N is different from standard model and refer to 4 Option of instruction manual for details.

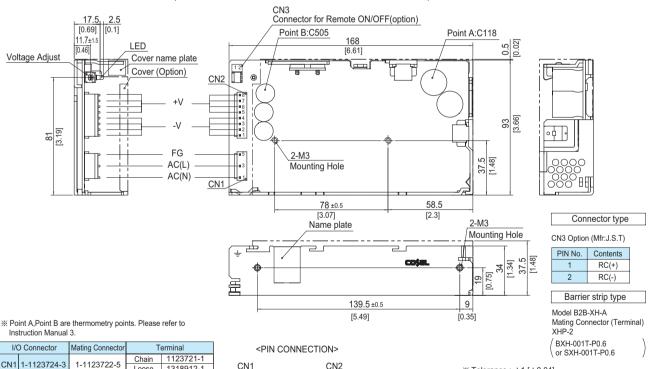

1/0	O Connector	Mating Connector	Terminal	
CNIA	1-1123724-3	1-1123722-5	Chain	1123721-1
CNT	1-1123724-3	1-1123722-5	Loose	1318912-1
ONIO	1-1123723-8	1-1123722-8	Chain	1123721-1
CNZ	1-1123723-8	1-1123722-8	Loose	1318912-1

(Mfr : Tyco Electronics AMP)

- ※ I/O Connector is Mfr.Tyco Electronics AMP
- Option : -J1 : (J.S.T) connector type
 -T : Vertical terminal block type

-T1 : Horizontal terminal block type Refer to Instruction Manual 4.

1 1		CN2	
in No.	Input	Pin No.	Outpu
1	AC(N)	1 - 4	-V
2		1 - 4	-v
3	AC(L)	5 - 8	+V
4		3-0	_ TV
5	FG		

Pi

- ※ Tolerance: ±1 [±0.04]
- Weight: 560g max (with cover: 625g max)
- % PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
- Chassis material: Aluminum
- ※ Keep drawing current per pin bellow 5A of CN2.
- * Dimensions in mm, []=inches
- ※ Mounting torque: 0.49N ⋅ m (5kgf ⋅ cm) max
- * Please connect safety ground to the unit in 2-M3 holes.