


SECTION A-A

SEE DETAIL "A"




DETAIL "A"
CHAMFER
SCALE=8:1

NOTES:

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	68 Ω	150 Ω	290 Ω
Minimum	- Ω	120 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

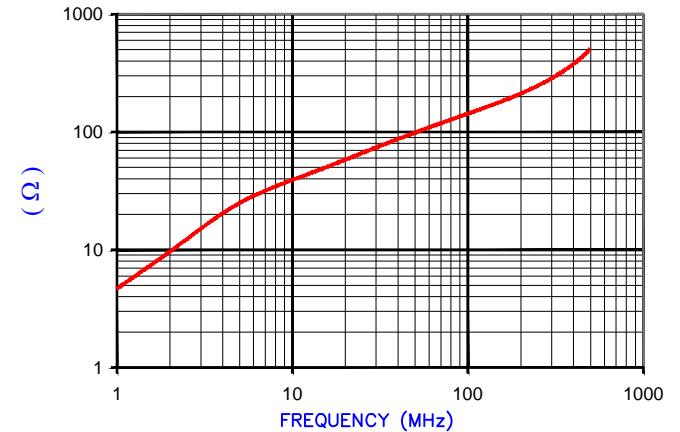

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture TEST REF. 2961

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	12.50 [.492]	+ 0.20 [.008]
B	8.30 [.327]	+ 0.40 [.016]
		- 0.00 [.000]
C	12.00 [.472]	+ 0.24 [.009]
D	5.50 [.217]	+ 0.20 [.008]
E	1.00 [.039]	+ 0.20 [.008]

WEIGHT/1000 3.52 kgs [7.77 Lbs]

SCALE DRAWING 1:1

28R0492-100

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				28R0492-100		B	FERRITE RIBBON CORE	JRK
B	UPDATE LOGO, ADD NOTES	03/14/2019	Jcai	DATE:	08/31/07	SCALE:	4 : 1	MATERIAL:
A	ORIGINAL DRAFT	08/31/07	JRK	CAD #	28R0492-100-B	TOOL #	R0492	Ferrite
REV	DESCRIPTION	DATE	INT					