SN54AC533 . . . J OR W PACKAGE SN74AC533 . . . DB, DW, N, NS, OR PW PACKAGE

SCAS555C - NOVEMBER 1995 - REVISED OCTOBER 2003

- 2-V to 6-V V_{CC} Operation
- Inputs Accept Voltages to 6 V
- Max t_{pd} of 10.5 ns at 5 V
- 3-State Inverting Outputs Drive Bus Lines Directly
- Full Parallel Access for Loading

description/ordering information


The 'AC533 devices are octal transparent D-type latches with 3-state outputs. When the latch-enable (LE) input is high, the \overline{Q} outputs follow the complements of the data (D) inputs. When LE is taken low, the \overline{Q} outputs are latched at the inverse logic levels set up at the D inputs.

A buffered output-enable (\overline{OE}) input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without need for interface or pullup components.

 \overline{OE} does not affect the internal operations of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

(то	P VI	EW)
1 2 3 4 5 6 7 8 9 10	U	20 19 18 17 16 15 14 13 12 11	V <u>CC</u> 80 80 70 60 50 50 150

SN54AC533 . . . FK PACKAGE (TOP VIEW)



To ensure the high-impedance state during power up or power down, $\overline{\text{OE}}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

TA	PACKAG	Eţ	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – N	Tube	SN74AC533N	SN74AC533N
		Tube	SN74AC533DW	4.0500
–40°C to 85°C	SOIC – DW	Tape and reel	SN74AC533DWR	AC533
	SOP – NS	Tape and reel	SN74AC533NSR	AC533
	SSOP – DB	Tape and reel	SN74AC533DBR	AC533
		Tube	SN74AC533PW	4.0500
	TSSOP – PW	Tape and reel	SN74AC533PWR	AC533
	CDIP – J	Tube	SNJ54AC533J	SNJ54AC533J
–55°C to 125°C	CFP – W	Tube	SNJ54AC533W	SNJ54AC533W
	LCCC – FK	Tube	SNJ54AC533FK	SNJ54AC533FK

ORDERING INFORMATION

[†] Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




Copyright © 2003, Texas Instruments Incorporated

SCAS555C - NOVEMBER 1995 - REVISED OCTOBER 2003

	FUNCTION TABLE (each latch)										
	INPUTS	OUTPUT									
OE	LE	D	Q								
L	Н	Н	L								
L	Н	L	н								
L	L	Х	\overline{Q}_0								
Н	Х	Х	Z								

logic diagram (positive logic)



To Seven Other Channels

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Input voltage range, V _I (see Note 1) Output voltage range, V _O (see Note 1) Input clamp current, I _{IK} (V _I < 0 or V _I > V _{CC}) Output clamp current, I _{OK} (V _O < 0 or V _O > V _{CC} Continuous output current, I _O (V _O = 0 to V _{CC}) Continuous current through V _{CC} or GND	-0.5 V to 7 -0.5 V to V _{CC} + 0.9 -0.5 V to V _{CC} + 0.9 ±20 r ±20 r DB package	5 V 5 V mA mA mA mA c/W c/W
Storage temperature range, T _{stg}	PW package	

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51-7.



SCAS555C - NOVEMBER 1995 - REVISED OCTOBER 2003

recommended operating conditions (see Note 3)

			SN54A	C533	SN74A	C533	
			MIN	MAX	MIN	MAX	UNIT
VCC	Supply voltage		2	6	2	6	V
		V _{CC} = 3 V	2.1		2.1		
VIH	High-level input voltage	$V_{CC} = 4.5 V$	3.15		3.15		V
		$V_{CC} = 5.5 V$	3.85		3.85		
		$V_{CC} = 3 V$		0.9		0.9	
VIL	Low-level input voltage	$V_{CC} = 4.5 V$		1.35		1.35	V
		V _{CC} = 5.5 V		1.65		1.65	
VI	Input voltage		0	Vcc	0	VCC	V
VO	Output voltage		0)	VCC	0	VCC	V
		V _{CC} = 3 V	202	-12		-12	
ЮН	High-level output current	$V_{CC} = 4.5 V$	A.	-24		-24	mA
		V _{CC} = 5.5 V		-24		-24	
		V _{CC} = 3 V		12		12	
IOL	Low-level output current	V _{CC} = 4.5 V		24		24	mA
		V _{CC} = 5.5 V		24		24	
$\Delta t/\Delta v$	Input transition rise or fall rate			8		8	ns/V
TA	Operating free-air temperature		-55	125	-40	85	°C

NOTE 3: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

		N	T	₄ = 25°C		SN54AC533	SN74	AC533	
PARAMETER	TEST CONDITIONS	VCC	MIN	TYP M	AX	MIN MA	X MIN	MAX	UNIT
		3 V	2.9			2.9	2.9	1	
	I _{OH} = -50 μA	4.5 V	4.4			4.4	4.4		
		5.5 V	5.4			5.4	5.4		.,
VOH	$I_{OH} = -12 \text{ mA}$	3 V	2.56			2.4	2.46	;	V
		4.5 V	3.86			3.7 🔊	3.76	i	
	I _{OH} = -24 mA	5.5 V	4.86			4.7	4.76	i	
		3 V			0.1	0.	1	0.1	
	l _{OL} = 50 μA	4.5 V			0.1	20	1	0.1	
		5.5 V			0.1	0	1	0.1	
VOL	I _{OL} = 12 mA	3 V		0	.36	Q 0.	5	0.44	V
		4.5 V		0	.36	0.	5	0.44	
	I _{OL} = 24 mA	5.5 V		0	.36	0.	5	0.44	
I _{OZ}	$V_{O} = V_{CC} \text{ or } GND$	5.5 V		±0	.25	±	5	±2.5	μA
Ц	$V_{I} = V_{CC}$ or GND	5.5 V		±	0.1	±	1	±1	μΑ
ICC	$V_{I} = V_{CC} \text{ or GND}, \qquad I_{O} = 0$	5.5 V			4	8	0	40	μA
Ci	$V_{I} = V_{CC} \text{ or } GND$	5 V		4.5					pF

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



SCAS555C - NOVEMBER 1995 - REVISED OCTOBER 2003

timing requirements over recommended operating free-air temperature range, V_{CC} = 3.3 V \pm 0.3 V (unless otherwise noted) (see Figure 1)

		T _A = 2	25°C	SN54AC533		SN74AC533		
		MIN	MAX	MIN _M	AX	MIN	MAX	UNIT
tw	Pulse duration, LE high	6		85	N-S	6.5		ns
t _{su}	Setup time, data before LE \downarrow	5.5		7.5		6		ns
t _h	Hold time, data after LE \downarrow	1.5		2.5		1		ns

timing requirements over recommended operating free-air temperature range, V_{CC} = 5 V \pm 0.5 V (unless otherwise noted) (see Figure 1)

		T _A = 2	25°C	SN54AC533	SN74AC533		
		MIN	MAX	MIN MAX	MIN	MAX	UNIT
tw	Pulse duration, LE high	4.5		6.5	5		ns
t _{su}	Setup time, data before LE \downarrow	4		6	4.5		ns
th	Hold time, data after LE \downarrow	1.5		2.5	1		ns

switching characteristics over recommended operating free-air temperature range, V_{CC} = 3.3 V ± 0.3 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	то	T _A = 25°C		SN54A	C533	SN74AC533		UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
^t PLH	ſ	Ia	2	14	1	17.5	1.5	16	
^t PHL	D	Q	2	13	1	16	1.5	14.5	ns
^t PLH	15	Ia	2	14.5	1	18	1.5	16.5	
^t PHL	LE	Q	2	13	1	16	1.5	14.5	ns
^t PZH	OE	Ia	2	12.5	37	15.5	1.5	14	
^t PZL	ÛE	Q	2	12.5	Q01	15.5	1.5	14	ns
^t PHZ	OE	D	2	13	4 1	16	1.5	14.5	20
^t PLZ	UE	Ŷ	2	13	1	16	1.5	14.5	ns

switching characteristics over recommended operating free-air temperature range, V_{CC} = 5 V \pm 0.5 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	ТО	T _A = 2	T _A = 25°C		C533	SN74AC533			
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX	MIN	MAX	UNIT	
^t PLH	D	Ia	2	10	1	12.5	1.5	11	20	
^t PHL	D	Q	2	9.5	1	12	1.5	10.5	ns	
^t PLH	LE	Ia	2	10.5	1	13	1.5	11.5		
^t PHL	LE	Q	2	10	1 4	13	1.5	11	ns	
^t PZH	OE	Ø	2	9.5	(e)	12	1.5	10.5		
^t PZL	UE	Q	2	9.5	$\gamma_{Q_{\ell}}^{1}$	12	1.5	10.5	ns	
^t PHZ	OE	IQ	2	10	4	12.5	1.5	11	ns	
^t PLZ	UE	Q	2	10	1	12.5	1.5	11	115	


operating characteristics, V_{CC} = 5 V, T_A = 25°C

	PARAMETER	TEST CON	TYP	UNIT	
C _{pd}	Power dissipation capacitance	C _L = 50 pF,	f = 1 MHz	40	pF

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



SCAS555C - NOVEMBER 1995 - REVISED OCTOBER 2003

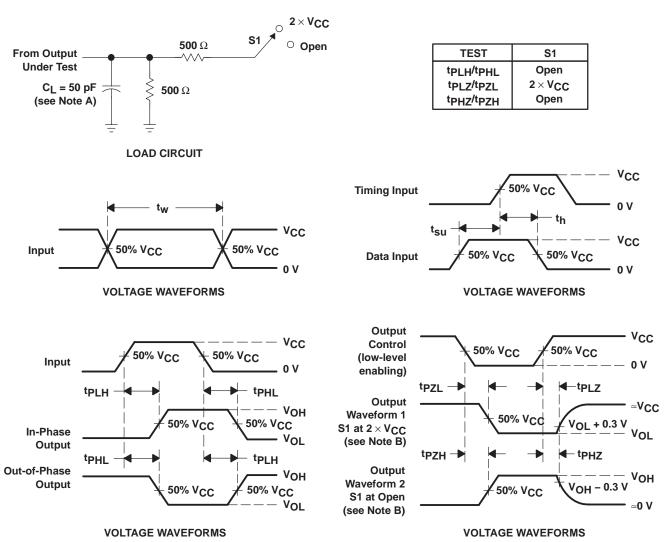

PARAMETER MEASUREMENT INFORMATION

NOTES: A. CI includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.

- Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, Z_O = 50 Ω , t_f \leq 2.5 ns, t_f \leq 2.5 ns.

D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms





10-Dec-2020

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
SN74AC533DW	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC533	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <= 1000ppm threshold. Antimony trioxide based flame retardants must also meet the <= 1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DW0020A



PACKAGE OUTLINE

SOIC - 2.65 mm max height

SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



DW0020A

EXAMPLE BOARD LAYOUT

SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



DW0020A

EXAMPLE STENCIL DESIGN

SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated