

LQP02TN6N8J02L

"#" indicates a package specification code.

Size Code 0402 (01005) in mm (in inch)



< List of part numbers with package codes >

LQP02TN6N8J02B LQP02TN6N8J02D LQP02TN6N8J02L

Applications


Unsuitable Applications	Please be sure to read and comply with these "Precautions for use."
Specific Applications	Consumer equipment, Medical equipment [GHTF A/B/C] except for implant & operation & auto-dispenser equipment, Industrial equipment except for transportation & facility & energy equipment Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.

References

Packaging	Specifications	Standard Packing Quantity
B	Bulk(Bag)	500
D	180mm Paper Tape	20000
L	180Embossed Tape	40000

Mass (typ.)	
1 piece	0.05mg

Appearance & Shape

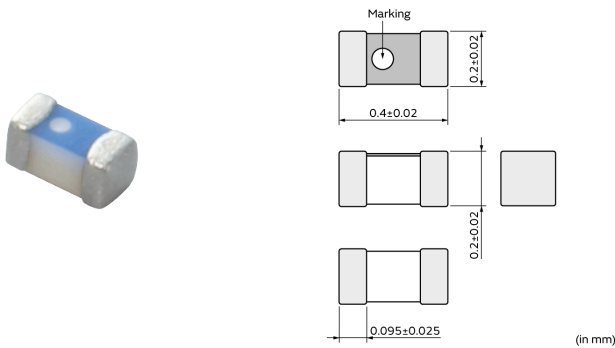

Attention

- This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LQP02TN6N8J02L

“#” indicates a package specification code.



Specifications

L size	0.4±0.02mm
W size	0.2±0.02mm
T size	0.2±0.02mm
Size code inch (mm)	01005 (0402)
Inductance	6.8nH±5%
Inductance Test Frequency	500MHz
Rated current (Itemp) (Based on Temperature rise)	140mA
Max. of DC resistance	2Ω
Q(min.)	8
Q Test Frequency	500MHz
Self resonance frequency (min.)	5500MHz
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
Brand	Murata
Series	LQP02TN_02

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LQP02TN6N8J02L


"#" indicates a package specification code.



Characteristic Data

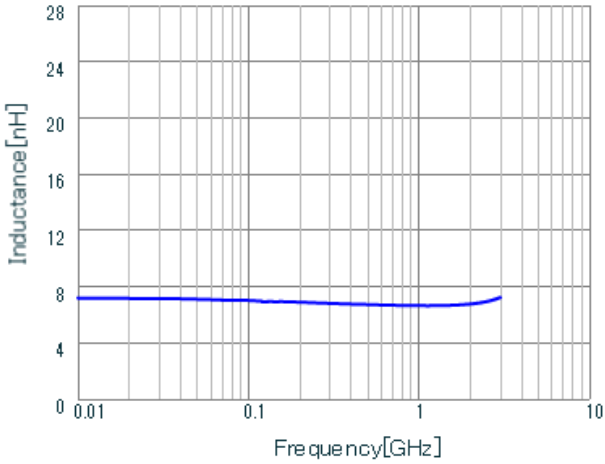

LQP02TN6N8J02 L.

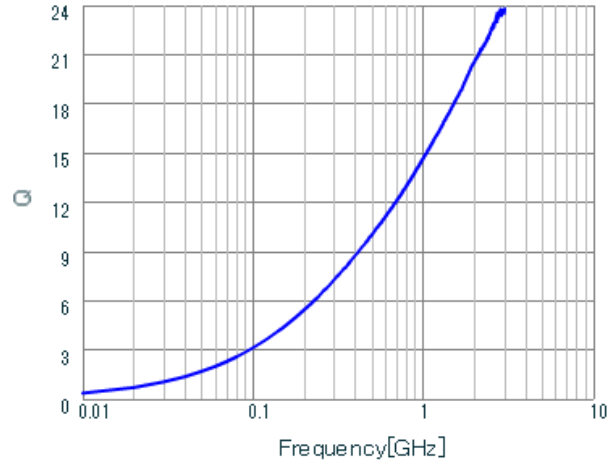

LQP02TN6N8J02 Q.

Inductance - Frequency Characteristics

Q-Frequency Characteristics

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.