# **SIEMENS**

Data sheet 3RT2018-1BE82



Power contactor, AC-3 16 A, 7.5 kW / 400 V 1 NC, 80 V DC 3-pole, Size S00 screw terminals

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	3 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	1 W
<ul> <li>without load current share typical</li> </ul>	4 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	7.3g / 5 ms, 4.7g / 10 ms
shock resistance with sine pulse	
• at DC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (switching cycles)	
of contactor typical	30 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C</li> </ul>	22 A
rated value	
• at AC-1	20.4
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	22 A
— up to 690 V at ambient temperature 60 °C	20 A
rated value	20 A
• at AC-3	
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
• at AC-3e	
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
at AC-4 at 400 V rated value	11.5 A
at AC-5a up to 690 V rated value	19.4 A
at AC-5b up to 400 V rated value	13.2 A
• at AC-5a up to 400 v rated value	10.271
— up to 230 V for current peak value n=20 rated	9.6 A
value	9.0 A
— up to 400 V for current peak value n=20 rated	9.6 A
value	
<ul> <li>up to 500 V for current peak value n=20 rated</li> </ul>	9.6 A
value	
— up to 690 V for current peak value n=20 rated	8.9 A
value	
• at AC-6a	
<ul> <li>— up to 230 V for current peak value n=30 rated value</li> </ul>	6.6 A
— up to 400 V for current peak value n=30 rated	6.4 A
value	0.471
— up to 500 V for current peak value n=30 rated	6.4 A
value	
— up to 690 V for current peak value n=30 rated	6.4 A
value	
minimum cross-section in main circuit at maximum AC-1 rated value	4 mm²
operational current for approx. 200000 operating	
cycles at AC-4	
at 400 V rated value	5.5 A
at 690 V rated value	4.4 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
with 2 current paths in series at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	12 A
— at 220 V rated value	1.6 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
with 3 current paths in series at DC-1	0.171
- with a current baths in series at DO-1	

— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
<ul><li>at 1 current path at DC-3 at DC-5</li></ul>	
— at 24 V rated value	20 A
— at 110 V rated value	0.1 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A
— at 110 V rated value	0.35 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power	
at AC-2 at 400 V rated value	7.5 kW
• at AC-3	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
operating power for approx. 200000 operating cycles	
at AC-4	
at 400 V rated value	2.5 kW
at 690 V rated value	3.5 kW
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	3.8 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	6.6 kVA
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	8.3 kVA
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	10.6 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	2.5 kVA
• up to 400 V for current peak value n=30 rated value	4.4 kVA
• up to 500 V for current peak value n=30 rated value	5.5 kVA
up to 690 V for current peak value n=30 rated value	7.6 kVA
short-time withstand current in cold operating state	
up to 40 °C	
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	300 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	169 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	128 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	92 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	74 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at DC	10 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
The arrange of the control onbbit tomage	

control cumply voltage of DC	
control supply voltage at DC	90.1/
rated value	80 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
full-scale value	1.1
closing power of magnet coil at DC	4 W
holding power of magnet coil at DC	4 W
closing delay	- · · · ·
• at DC	30 100 ms
opening delay	30 100 III3
• at DC	7 13 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	Standard AT - AZ
	4
number of NC contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value     at 500 V rated value	2 A
at 690 V rated value     at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A
at 125 V rated value	2 A
at 123 V rated value     at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	0.10 A
• at 24 V rated value	10 A
at 48 V rated value	2 A
• at 60 V rated value	2 A
at 10 V rated value     at 110 V rated value	1A
at 175 V rated value     at 125 V rated value	0.9 A
at 220 V rated value     at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	ridaity switching per 100 million (17 V, 1 m/v)
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	14 A
at 480 V rated value     at 600 V rated value	14 A 11 A
	110
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> <li>— at 110/120 V rated value</li> </ul>	1 hn
— at 110/120 V rated value  — at 230 V rated value	1 hp
for 3-phase AC motor	2 hp
at 200/208 V rated value	3 hn
— at 200/208 V rated value  — at 220/230 V rated value	3 hp 5 hp
— at 220/230 V rated value  — at 460/480 V rated value	10 hp
— at 460/460 V rated value  — at 575/600 V rated value	10 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
	7,000 / 0,000
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit  with type of coordination 1 required.	aC: 50A (600V 100kA) aM: 25A (600V 100kA) B000; 50A (445V 00kA)
— with type of coordination 1 required	gG: 50A (690V,100kA), aM: 25A (690V,100kA), BS88: 50A (415V,80kA)
<ul> <li>— with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch</li> </ul>	gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)
<ul> <li>IOLSHOU-CHAIL DROPERION OF THE SHYMARY SWITCH</li> </ul>	gG: 10 A (500 V, 1 kA)

required	
nstallation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
• side-by-side mounting	Yes
height	58 mm
width	45 mm
depth	73 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
	0 111111
onnections/ Terminals type of electrical connection	
for main current circuit	paraw typo tarminala
	screw-type terminals
for auxiliary and control circuit     at contactor for auxiliary contactor	screw-type terminals
at contactor for auxiliary contacts     of magnet soil	Screw-type terminals
of magnet coil  type of connectable conductor cross-sections	Screw-type terminals
• for main contacts	0 (0.5
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for main contacts	2x (20 16), 2x (18 14), 2x 12
connectable conductor cross-section for main contacts	
• solid	0.5 4 mm²
stranded	0.5 4 mm²
	0.5 4 mm² 0.5 2.5 mm²
finely stranded with core end processing  connectable conductor cross-section for auxiliary contacts	0.0 2.0 IIIII
solid or stranded	0.5 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm <sup>2</sup>
type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for auxiliary contacts	2x (20 16), 2x (18 14), 2x 12
AWG number as coded connectable conductor cross	ZA (20 10), ZA (10 17), ZA 12
section	
for main contacts	20 12
<ul> <li>for auxiliary contacts</li> </ul>	20 12
afety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
	1 000 000
B10 value with high demand rate according to SN 31920	1 000 000

<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
suitability for use	
<ul> <li>safety-related switching on</li> </ul>	Yes
<ul> <li>safety-related switching OFF</li> </ul>	Yes

## Certificates/ approvals

## **General Product Approval**





Confirmation



<u>KC</u>





Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

### Marine / Shipping













Marine / Shipping other Dangerous Good



Confirmation



<u>Transport Information</u>

#### **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2018-1BE82

Cax online generator

 $\underline{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2018-1BE82$ 

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-1BE82

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2018-1BE82\&lang=en}}$ 


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-1BE82/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2018-1BE82&objecttype=14&gridview=view1







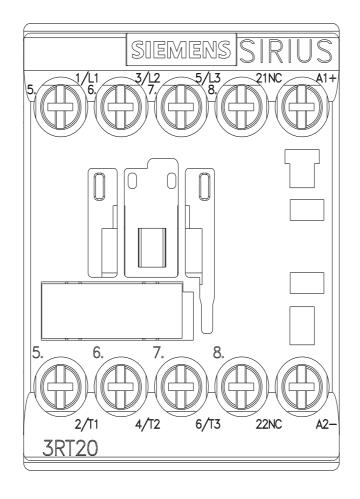

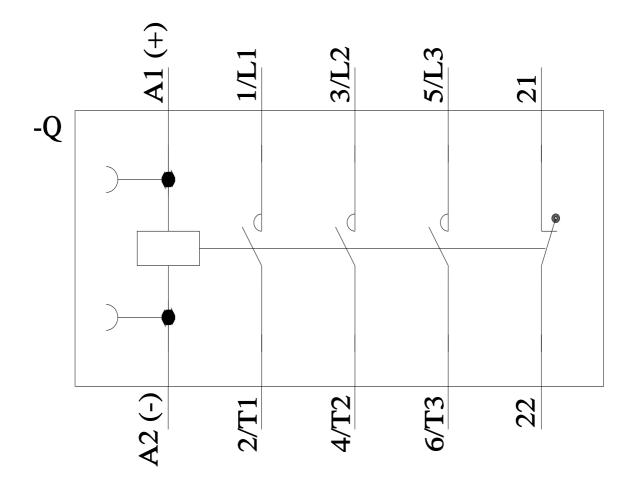

last modified: 6/2/2022 🖸