## SIEMENS

## Data sheet

## 3VA5211-7EC32-0AA0



circuit breaker 3VA5 UL frame 250 breaking capacity class C 100kA @ 480 V 3-pole, line protection TM230, FTAM, In=110A overload protection Ir=110A fixed short-circuit protection Ii=5...10 x In nut keeper kit on both sides

Model					
product brand name	SENTRON				
product designation	Molded-case circuit breaker				
product designation / according to UL file	CFAS				
Product version	System protection				
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes				
design of the load switch / according to UL 489 / High- Intensity-Discharge circuit breaker (HID Type)	No				
design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type)	No				
design of the overcurrent release	TM230				
protection function of the overcurrent release	LI				
number of poles	3				
General technical data					
rated insulation voltage Ui	800 V				
Max. rated operational voltage Ue with DC	750 V				
operating voltage / at AC / rated value	690 V				
power loss [W] / maximum	23 W				
Active power loss / for rated value of the current / at AC / in hot operating state / per pole	7.53 W				
mechanical service life (switching cycles) / typical	20 000				
Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz	8 000				
Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz	4 000				
electrical endurance (switching cycles) / at 480 V	8 000				
electrical endurance (switching cycles) / at 600 V	4 000				
Neutral conductors / upgradeable/retrofittable	No				
ground-fault monitoring version	without				
product function					
<ul> <li>communication function</li> </ul>	No				
other measurement function	No				
Net Weight	2.252 kg				
Current					
marking / according to UL 489 / 100%-rated breaker	No				
operational current					
• at 40 °C	110 A				
● at 45 °C	107 A				
● at 50 °C	104 A				

● at 55 °C	100 A
● at 60 °C	97 A
● at 65 °C	94 A
• at 70 °C	91 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	С
breaking capacity maximum short-circuit current (Icu)	
• at 240 V	200 kA
• at 415 V	110 kA
● at 690 V	10 kA
breaking capacity operating short-circuit current (lcs)	
• at 240 V	200 kA
• at 415 V	110 kA
● at 690 V	10 kA
short-circuit current making capacity (lcm)	
• at 240 V	440 kA
• at 415 V	242 kA
● at 690 V	17 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Switching capacity according to UL 489	
breaking capacity current	
• at 240 V	200 kA
• at 480 V	100 kA
• at 600 V	35 kA
Adjustable parameters	
Adjustable response value current / Ig min.	110 A
Adjustable response value current / Ig min.	110 A
Ground fault protection / tripping switchable / I2t=ON/OFF	No
Mechanical Design	
height [in]	7.28 in
Height	185 mm
width [in]	4.13 in
Width	105 mm
depth [in]	3.27 in
depth	83 mm
Connections	
arrangement of electrical connectors / for main current circuit	Front connection
0	Front connection nut keeper kit on both ends
circuit	
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max.	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	nut keeper kit on both ends 13 x 1 mm
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No No O
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No No O
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No No O
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No No O Yes
circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver No No No No Yes

<ul> <li>during storage</li> <li>during storage</li> </ul>			40 °C 0 °C			
Certificates		o		_		
reference code / acc	cording to IEC 81346-2	C	Q			
General Product A	pproval			EMC	Declaration of Conformity	
SP Can	<u>Confirmation</u>		Ű	RCM	UK CA	
Declaration of Conformity	Marine / Shipping	other				
EG-Konf.	ABS	<u>Miscellaneous</u>				
Further information Information- and Downloadcenter (Catalogs, Brochures,)						
http://www.siemens.com/lowvoltage/catalogs						
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5211-7EC32-0AA0						
Service&Support (Manuals, Certificates, Characteristics, FAQs,)						
	https://support.industry.siemens.com/cs/ww/en/ps/3VA5211-7EC32-0AA0					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,)						


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA5211-7EC32-0AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications










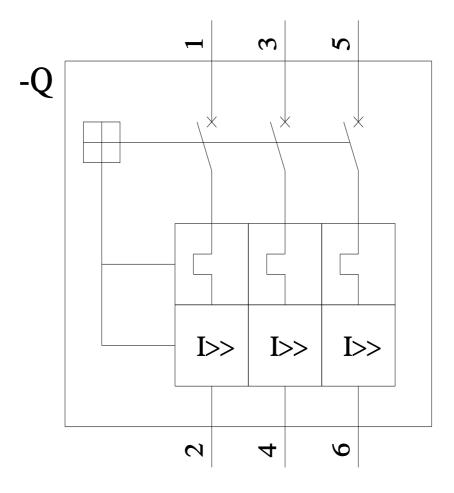

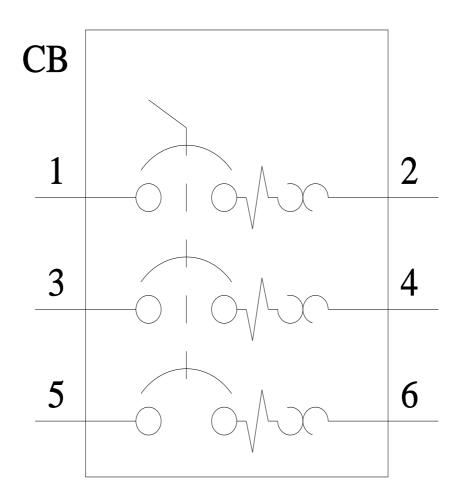

last modified:

7/15/2022 🖸