



www.lemo.com

SUMMARY

Wires

Low voltage 2



Image is for illustrative purpose only

Series 0B

Termination type Male solder

IP rating 50

AWG wire size 28.00 - 20.00

Cable Ø 0.00 - 0.00 mm

Status active

Matching parts EGG.0B.302.CLL

PHG.0B.302.CLLZ

Download

Request a quote

Catalog

See video assembly instructions

TECHNICAL DETAILS

Mechanics

Shell Style/Model FG*: Straight plug, cable collet

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 7.65 g

Performance

Configuration 0B.302 : 2 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 10 Amps

Specifications

Contact Type: Solder

Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 1.0 mm (0.039in)

Max. Solid Conductor: 0.56 mm² (AWG 20) Max. Stranded Conductor: 0.56 mm² (AWG 20)

R (max): 4.8 mOhm

Vtest (contact-shell): 1050 V (AC), 1490 V (DC) Vtest (contact-contact): 1000 V (AC), 1400 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
Salt Spray Corrosion: >1000 hr
12NC part number: 4022.438.33197

DRAWINGS

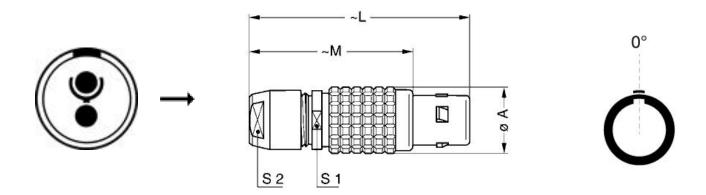

Dimensions

	Α	L	М	S 1	S2
mm.	9.5	36	26	8	7
in.	0,37	1,42	1,02	0,31	0,28

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.0B.005.PA070

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Caps:

BFG.0B.100.PCSG

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.