

TOLERANCE UNLESS OTHERWISE SPECIFICE THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



(1)

ORIGINAL

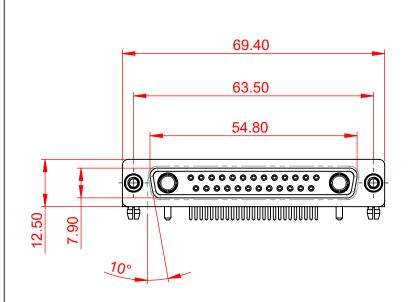



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
YOUR C	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-27W2650-1N5		ISSUE
			PART NUMBER: 630-27W	/2650-1N5	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. R. UL94V-0

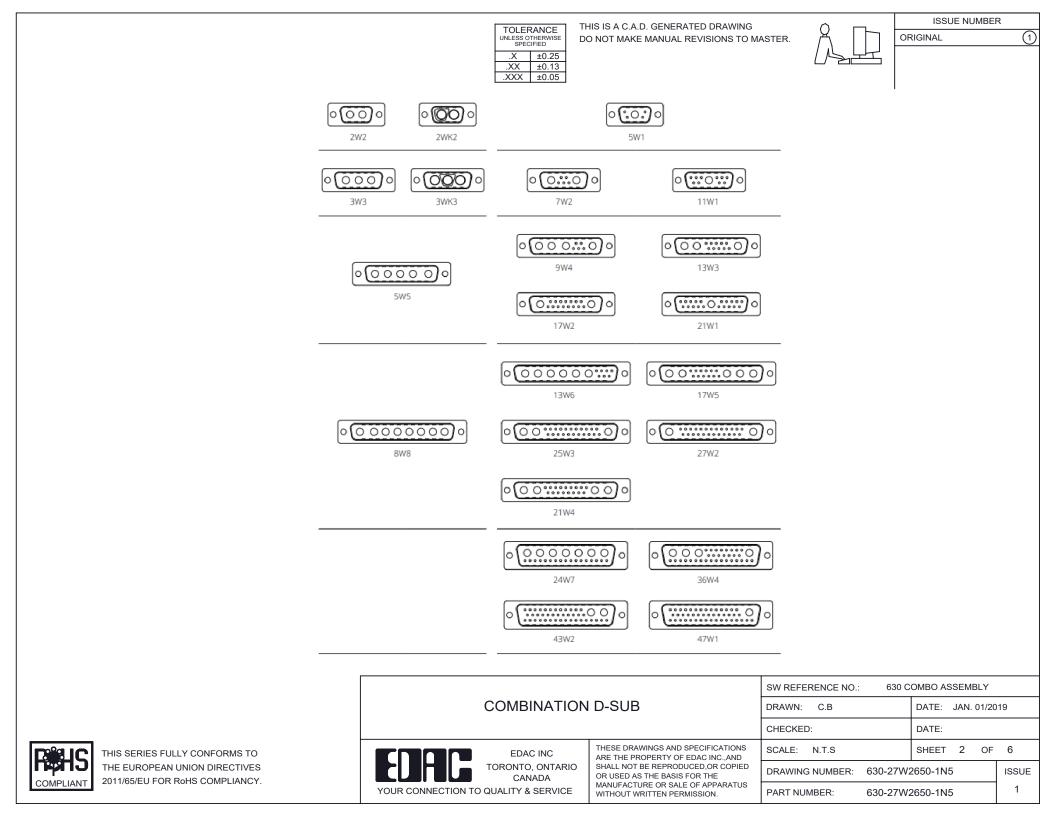



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male



PCB EDGE






PCB EDGE






21W4 Male/Female

27W2 Male/Female




21W1 Male/Female



		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 3 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-27W2650-1N5		ISSUE
			PART NUMBER: 630-27W	2650-1N5	1


5W5 Female




8W8 Female

CURRENT RATING / ØA


10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



17W2 Male/Female








PCB EDGE

11W1 Male/Female



THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.36

PCB EDGE

PCB EDGE

31.75

21.9

36W4 Female



13W6 Male



2.77

PCB EDGE



30.50

2.77

22.16

22.16

PCB EDGE

2.77

20.78

13W6 Female

13W3 Female

.X ±0.25 .XX ±0.13 .XXX ±0.05

43W2 Female





17W5 Male











	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4	
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-27W	2650-1N5	ISSUE	
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-27W	2650-1N5	1	





20.7

13.72

