


| ITEM | PART# | DESCRIPTION | QTY | UOM |
|------|-----------|---|-----|-----|
| A | 561349002 | 2.0 WTB CONN CRIMP REC AWG#26-#28 CHAIN | 1 | PC |

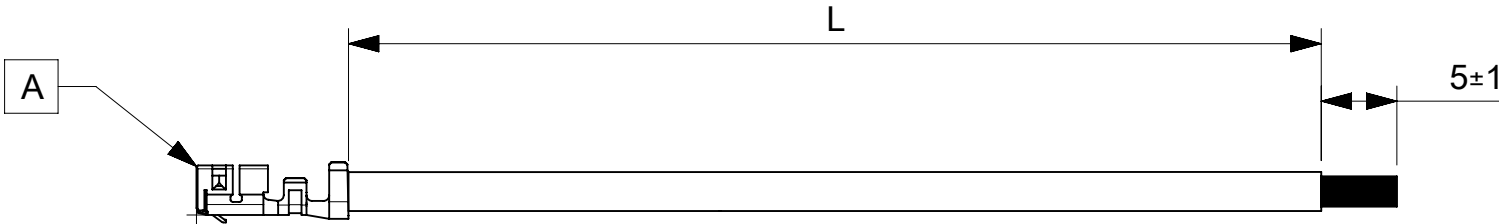

| PART NUMBER | TITLE | CABLE DESCRIPTION | LENGTH 'L' | CABLE COLOR |
|-------------|--|----------------------------|------------|-------------|
| 2196551101 | Micro-One ISL F-S 75mm 26AWG Lead BK Sn | 1X26AWG DISC PVC BK UL1569 | 75±3 | BLACK |
| 2196551102 | Micro-One ISL F-S 150mm 26AWG Lead BK Sn | 1X26AWG DISC PVC BK UL1569 | 150±4 | BLACK |
| 2196551103 | Micro-One ISL F-S 225mm 26AWG Lead BK Sn | 1X26AWG DISC PVC BK UL1569 | 225±4 | BLACK |
| 2196551104 | Micro-One ISL F-S 300mm 26AWG Lead BK Sn | 1X26AWG DISC PVC BK UL1569 | 300±4 | BLACK |
| 2196551105 | Micro-One ISL F-S 450mm 26AWG Lead BK Sn | 1X26AWG DISC PVC BK UL1569 | 450±4 | BLACK |
| 2196552101 | Micro-One ISL F-S 75mm 26AWG Lead RD Sn | 1X26AWG DISC PVC RD UL1569 | 75±3 | RED |
| 2196552102 | Micro-One ISL F-S 150mm 26AWG Lead RD Sn | 1X26AWG DISC PVC RD UL1569 | 150±4 | RED |
| 2196552103 | Micro-One ISL F-S 225mm 26AWG Lead RD Sn | 1X26AWG DISC PVC RD UL1569 | 225±4 | RED |
| 2196552104 | Micro-One ISL F-S 300mm 26AWG Lead RD Sn | 1X26AWG DISC PVC RD UL1569 | 300±4 | RED |
| 2196552105 | Micro-One ISL F-S 450mm 26AWG Lead RD Sn | 1X26AWG DISC PVC RD UL1569 | 450±4 | RED |

- NOTES:**
1. Crimping to be done as per Molex standards.
 2. The product specification relies on the terminals & wire spec.
 3. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.65mm Max.

| REVISION | | | |
|------------|-----|-----------------|---------|
| DATE | REV | DESCRIPTION | CHANGER |
| 2021/12/27 | A | INITIAL RELEASE | SAIKIG |

| | | | |
|-----------------|----|--------------|---------------------|
| DOCUMENT STATUS | P1 | RELEASE DATE | 2022/01/11 06:51:04 |
|-----------------|----|--------------|---------------------|

| | | | | | | |
|--|---|---|-------------------|---|---|--|
| FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0 DIVISIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | CURRENT REV DESC: | | SEE TABLE PRODUCT CUSTOMER DRAWING | |
| | DIMENSION UNITS: mm SCALE: NTS | GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° | | EC NO: 690622 DRWN: SAIKIG 2021/12/25 CHK'D: MNARAYAN01 2022/01/11 APPR: MNARAYAN01 2022/01/11 | | |
| | 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ± | INITIAL REVISION: DRWN: SAIKIG 2021/12/25 APPR: MNARAYAN01 2022/01/11 | | DOCUMENT NUMBER: 2196551101 DOC TYPE: PSD DOC PART: 000 REVISION: A | | |
| | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | THIRD ANGLE PROJECTION | DRAWING: A4-SIZE | SERIES: 219655 | | MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1 |