

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

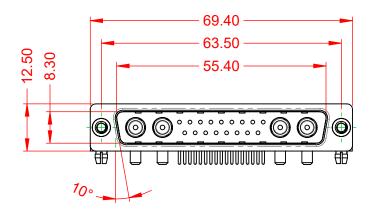



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 30µ" GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



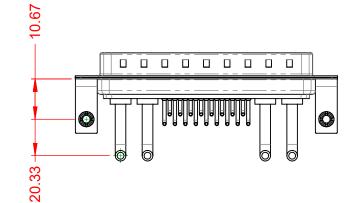

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	DRAWN: C.B	DATE: JAN. 01/2019	
	CHECKED:	DATE:	
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2	
ĺ	DDAMING NUMBER: 620 24M/4650 2T2		_

DRAWING NUMBER: 629-21W4650-2T3 ISSUE PART NUMBER: 629-21W4650-2T3



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

00

o€:

2W2

2WK2

5W1

00000 3W3

0000) 3WK3





11W1


00000 5W5

9W4




13W3





17W2





17W5



000:::::0 25W3




00*******00

21W4











43W2

47W1

COMBINATION D-SUB

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.:	629 COMBO ASSEMBLY	
	DRAWN: C.B	DATE: JAN. 01/2019	
	CHECKED:	DATE:	
	SCALE: N.T.S	SHEET 2 OF 2	
)	DRAWING NUMBER: 62	9-21W4650-2T3 ISSUE	=

629-21W4650-2T3

PART NUMBER: