

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

## MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, grey-black colour, matte finish.

## CAP

Technopolymer in Ergostyle colours, matte finish; supplied assembled, press-fit assembly, removable by a screwdriver.

Available also as accessory sold separately (see caps table ECA.).

Code	Description	Cap for
29753-*	ECA.W3-*	ESN.55
29754-*	ECA.W4-*	ESN.70

\* Complete with colour index (C1, ..., C17).

## STANDARD EXECUTIONS

Brass boss, threaded pass-through hole.

- **ESN-B**: with cap.
- **ESN-FP**: without cap.

## OTHER EXECUTIONS ON REQUEST


Also available with standard metric holes.

## ERGONOMY AND DESIGN

The slightly concave marks on the wing help to position the fingers in order to apply the maximum force when turning.



ERGOSTYLE® ELESA Original design 2003

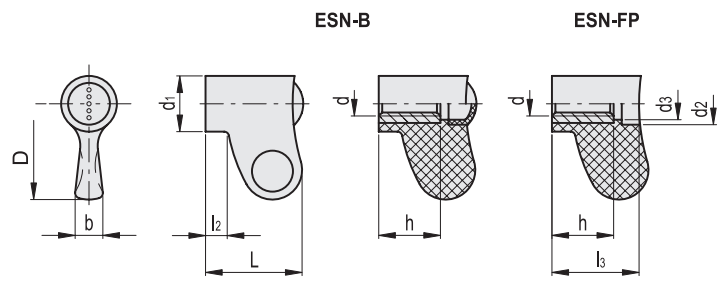

\* Complete with colour index, example: 90225236-C2 ESN.55 B-1/4-20-C2

<b>C1</b> RAL7021	<b>C2</b> RAL2004	<b>C3</b> RAL7035	<b>C4</b> RAL1021	<b>C5</b> RAL5024	<b>C6</b> RAL3000	<b>C17</b> RAL6017
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	-----------------------

## ESN.

**INCH**

Code	Description	D	d2B	L	d1	l2	b	h	△
90225236-*	ESN.55 B-1/4-20-*	1.08	1/4-20	1.1	0.63	0.26	0.31	0.71	0.04
90225241-*	ESN.55 B-5/16-18-*	1.08	5/16-18	1.1	0.63	0.26	0.31	0.71	0.04
90225406-*	ESN.70 B-5/16-18-*	1.38	5/16-18	1.42	0.79	0.31	0.39	0.79	0.07
90225411-*	ESN.70 B-3/8-16-*	1.38	3/8-16	1.42	0.79	0.31	0.39	0.79	0.07

## ESN-FP

Code	Description	D	d2B	L	d1	d2	d3	l2	l3	b	h	△
90225132-C0	ESN.55 FP-1/4-20-C0	1.08	1/4-20	1.1	0.63	0.47	0.41	0.26	0.98	0.31	0.71	0.04
90225133-C0	ESN.55 FP-5/16-18-C0	1.08	5/16-18	1.1	0.63	0.47	0.41	0.26	0.98	0.31	0.71	0.04
90225152-C0	ESN.70 FP-5/16-18-C0	1.38	5/16-18	1.42	0.79	0.59	0.51	0.31	1.26	0.39	0.79	0.07
90225153-C0	ESN.70 FP-3/8-16-C0	1.38	3/8-16	1.42	0.79	0.59	0.51	0.31	1.26	0.39	0.79	0.07

Clamping knobs