

REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	2016.12.24	A	INITIAL RELEASE.	DICK

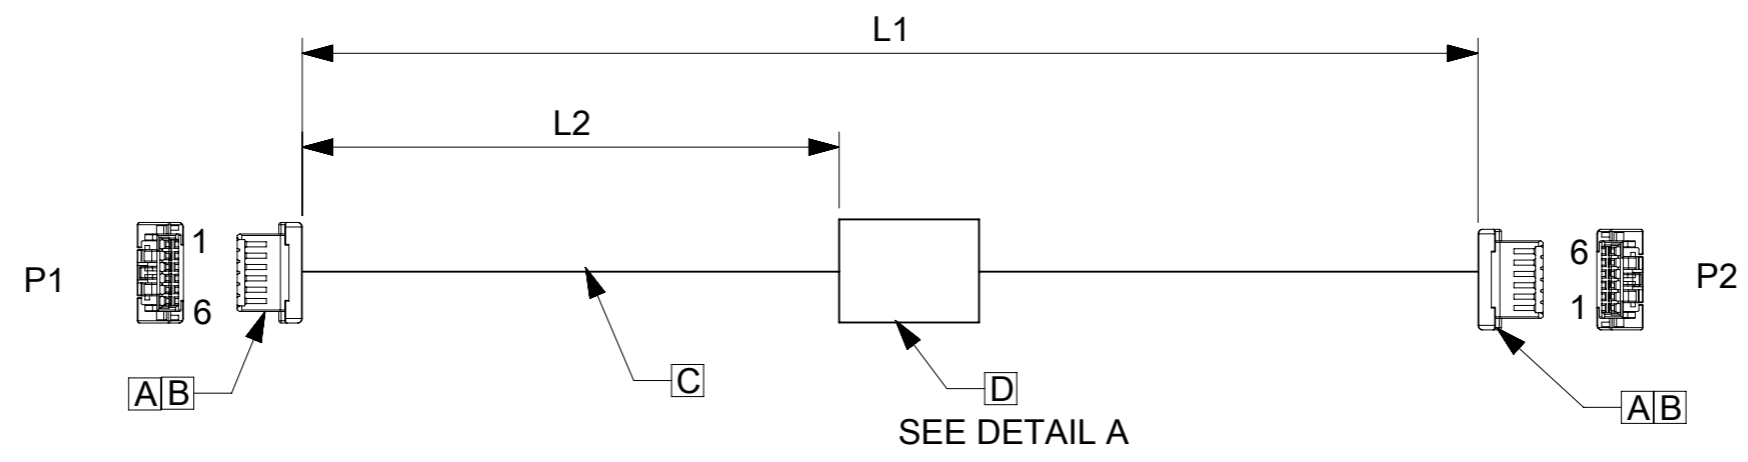


TABLE			
PART NUMBER	L1	L2	TITLE
151350600	50±5	18REF	Clickmate 6 Circuit 50MM
151350601	100±8	44REF	Clickmate 6 Circuit 100MM
151350602	150±10	69REF	Clickmate 6 Circuit 150MM
151350603	300±10	144REF	Clickmate 6 Circuit 300MM
151350605	450±15	219REF	Clickmate 6 Circuit 450MM
151350606	600±15	294REF	Clickmate 6 Circuit 600MM

P/N:15135XXXX—MOLEX PN
MOLEX

DETAIL A

NOTES

1. THIS PRODUCT MUST MEET 2011/65/EU ROHS COMPLIANCE.
此产品需符合 2011/65/EU ROHS环保要求.
2. ELECTRICAL PERFORMANCE REFER TO ES-000.
电气特性参考ES-000.
3. LABEL TEXT MUST BE 2mm MAX. IN HEIGHT WITH ARIAL FONT.
标签字高最大2mm,字体ARIAL.
4. STICK UL LABEL ON THE OUTSIDE CARTON.
外箱上贴UL标签.

ITEM	DESCRIPTION	L(MM)	QTY
D	Blank label 12.7x35.5mm (WHT:12.7mm) HF		1
C	24AWG;PLATED;PVC;BK;OD=1.10MM;UL1061	A/R	
B	1.5 W/B Single Plg Term Chain W/Plt ,Tin Plating		12
A	1.5 W/B Single Plug Hsg 6Ckt Beige		2

WIRING CHART		
P1	P2	COLOR
1	6	BLACK
2	5	BLACK
3	4	BLACK
4	3	BLACK
5	2	BLACK
6	1	BLACK

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
QUALITY SYMBOLS 	EC NO: 111920 DRWN: WLXIE CHK'D: DHUANG16 APPR: YXZOU	2016/12/24 2016/12/28 2017/01/10	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE					
			ANGULAR TOL ± °		MM	NTS					
			4 PLACES ±	3 PLACES ±	DRWN BY	DATE					
			3 PLACES ±	2 PLACES ±	WLXIE	2016/11/18					
1 PLACE ±	0 PLACES ±	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING			SERIES	MATERIAL NUMBER	CUSTOMER		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		YXZOU	2016/12/23	A3			THIRD ANGLE PROJECTION	201234	SEE TABLE	GENERAL MARKET	
		APPR BY	DATE				DRAWING SIZE	DOCUMENT NUMBER			
								2012341677	DOC TYPE	DOC PART	SHEET NUMBER
								PSD	000	1 OF 1	