



**Data sheet | Item number: 870-540/281-411**

Component terminal block; double-deck; with diode 1N4007; anode, right side; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray

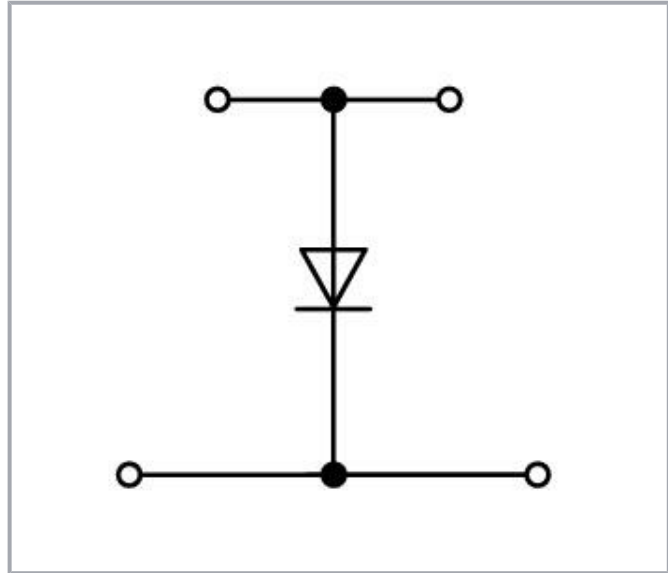

[www.wago.com/870-540/281-411](http://www.wago.com/870-540/281-411)

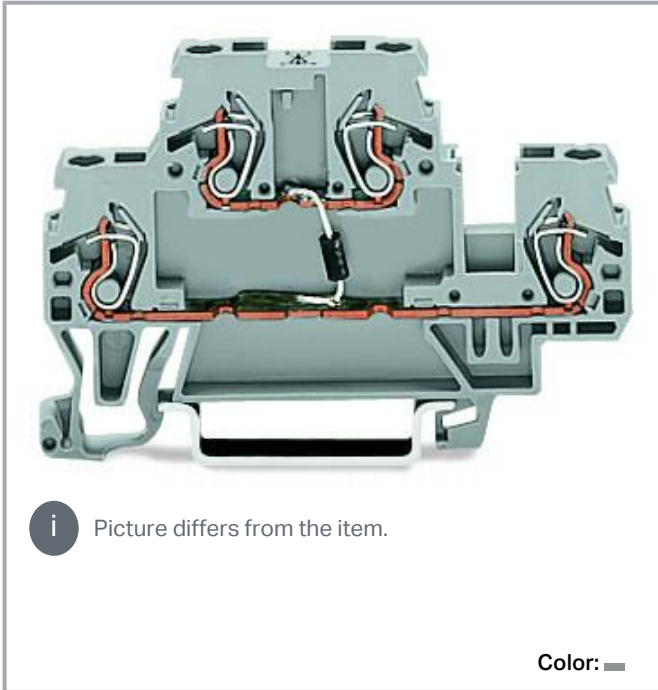

**Data**

**Notes**

Safety information

Max. insulation diameter: 4.4 mm

**Electrical data**

**Ratings per IEC/EN**

|               |                  |
|---------------|------------------|
| Ratings per   | IEC/EN 60947-7-1 |
| Rated current | 0.5 A            |

**General**

|                 |         |
|-----------------|---------|
| Nominal voltage | 250 V   |
| Reverse voltage | 1,000 V |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Connection data

|                            |   |
|----------------------------|---|
| Connection points          | 4 |
| Total number of potentials | 1 |
| Number of levels           | 2 |

## Connection 1

|   |  |
|---|--|
| Connection technology                           | CAGE CLAMP®                                  |
| Actuation type                                  | Operating tool                               |
| Connectable conductor materials                 | Copper                                       |
| Solid conductor                                 | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG |
| Fine-stranded conductor                         | 0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG   |
| Fine-stranded conductor; with insulated ferrule | 0.08 ... 1.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                                    | 6 ... 7 mm / 0.24 ... 0.28 inches            |
| Wiring direction                                | Front-entry wiring                           |

## Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 5 mm / 0.197 inches  |
| Height                            | 70 mm / 2.756 inches |
| Depth from upper-edge of DIN-rail | 40 mm / 1.575 inches |

## Mechanical Data

|               |                 |
|---------------|-----------------|
| Design        | horizontal type |
| Mounting type | DIN-35 rail     |
| Marking level | Side marking    |

## Material Data

|                             |  |
|-----------------------------|--|
| Note (material data)        | <a href="#">Information on material specifications can be found here</a> |
| Color                       | gray   |
| Material group              | I  |
| Insulation material         | Polyamide (PA66)   |
| Flammability class per UL94 | V0   |
| Fire load                   | 0.177 MJ   |
| Weight                      | 10.2 g   |

Subject to changes. Please also observe the further product documentation!



## Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |

## Commercial data

|                       |  |
|-----------------------|--|
| Product Group         | 16 (Rail Mounted Terminal Blocks with CCC) |
| eCl@ss 10.0           | 27-14-11-27                                |
| eCl@ss 9.0            | 27-14-11-27                                |
| ETIM 8.0              | EC000903                                   |
| ETIM 7.0              | EC000903                                   |
| PU (SPU)              | 50 pcs                                     |
| Packaging type        | box  |
| Country of origin     | DE   |
| GTIN                  | 4045454198558                              |
| Customs tariff number | 85369010000                                |

## Environmental Product Compliance

|   |  |
|---|--|
| CAS-No.                                   | 7439-92-1<br>79-94-7                                     |
| REACH Candidate List Substance            | 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol<br>Lead |
| RoHS Compliance Status                    | Compliant, With Exemption                                |
| RoHS Exemption                            | 7(a)<br>7(c)-I<br>7(c)-II                                |
| SCIP notification number (Austria)        | 1627191f-4634-423d-9bf8-f34b9a061857                     |
| SCIP notification number (Belgium)        | 712a1bfc-534b-4bb1-b03d-3ae488789f7f                     |
| SCIP notification number (Bulgaria)       | 67ed6d79-d5a7-4819-99dd-6da184c76a58                     |
| SCIP notification number (Czech Republic) | 5056ec78-f170-4a61-a8d2-2f52a1d83729                     |
| SCIP notification number (Denmark)        | 473dc351-6ddf-4715-9fa8-205831dc7df1                     |
| SCIP notification number (Finland)        | fc682e9e-9d11-44cc-9b87-d3bdc273d075                     |
| SCIP notification number (France)         | 54238c35-8988-49d6-8cc3-1412ddaaae55                     |
| SCIP notification number (Germany)        | 8e200fc0-5a36-4724-a316-af477b2d8a00                     |
| SCIP notification number (Hungary)        | e2c8a97f-0ffa-4582-8b16-338a7b3c9a53                     |
| SCIP notification number (Italy)          | 03bb7413-2f2a-4599-a4fd-0a80de688389                     |
| SCIP notification number (Netherlands)    | 44752cfc-e2ba-4dd2-be65-19f2e38dd248                     |
| SCIP notification number (Poland)         | 724c564d-8273-4287-8831-3c8d81b695d2                     |
| SCIP notification number (Romania)        | 0712e983-cf26-47ed-a64e-2f83f821ae56                     |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Required accessories

### End plate

#### End plate



**Item no.: 870-518**

End and intermediate plate; 2 mm thick; gray

[www.wago.com/870-518](http://www.wago.com/870-518)



**Item no.: 870-519**

End and intermediate plate; 2 mm thick; orange

[www.wago.com/870-519](http://www.wago.com/870-519)

## Optional accessories

### Mounting

#### Mounting accessories



**Item no.: 209-106**

Mounting carrier; for isolated mounting on DIN 35 rails; gray

[www.wago.com/209-106](http://www.wago.com/209-106)



**Item no.: 249-116**

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-116](http://www.wago.com/249-116)



**Item no.: 249-117**

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-117](http://www.wago.com/249-117)

### Ferrule

#### Ferrule

1

**Item no.: 216-123**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated; silver-colored

[www.wago.com/216-123](http://www.wago.com/216-123)

1

**Item no.: 216-122**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated; silver-colored

[www.wago.com/216-122](http://www.wago.com/216-122)

1

**Item no.: 216-124**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

[www.wago.com/216-124](http://www.wago.com/216-124)

1

**Item no.: 216-132**

Ferrule; Sleeve for 0.34 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

[www.wago.com/216-132](http://www.wago.com/216-132)

1

**Item no.: 216-121**

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated; silver-colored

[www.wago.com/216-121](http://www.wago.com/216-121)

1

**Item no.: 216-131**

Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated; silver-colored

[www.wago.com/216-131](http://www.wago.com/216-131)

1

**Item no.: 216-223**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; red

[www.wago.com/216-223](http://www.wago.com/216-223)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27















32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169




Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.






|   |   |  |
|---|---|--|
|      | <p><b>Item no.: 216-222</b><br/>                     Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray</p>            | <a href="http://www.wago.com/216-222">www.wago.com/216-222</a> |
|      | <p><b>Item no.: 216-221</b><br/>                     Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; white</p>            | <a href="http://www.wago.com/216-221">www.wago.com/216-221</a> |
|      | <p><b>Item no.: 216-224</b><br/>                     Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; black</p>            | <a href="http://www.wago.com/216-224">www.wago.com/216-224</a> |
|      | <p><b>Item no.: 216-321</b><br/>                     Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow</p>          | <a href="http://www.wago.com/216-321">www.wago.com/216-321</a> |
|      | <p><b>Item no.: 216-322</b><br/>                     Ferrule; Sleeve for 0.34 mm<sup>2</sup> / 22 AWG; insulated; electro-tin plated; light turquoise</p> | <a href="http://www.wago.com/216-322">www.wago.com/216-322</a> |
| <b>Protective warning marker</b>  |   |  |
| Cover   |   |  |
|     | <p><b>Item no.: 280-405</b><br/>                     Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow</p>        | <a href="http://www.wago.com/280-405">www.wago.com/280-405</a> |
| <b>Jumpers</b>  |   |  |
| Jumper  |   |  |
|     | <p><b>Item no.: 870-402</b><br/>                     Jumper; 2-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-402">www.wago.com/870-402</a> |
|    | <p><b>Item no.: 870-404</b></p>   | <a href="http://www.wago.com/870-404">www.wago.com/870-404</a> |
|   | <p><b>Item no.: 870-405</b><br/>                     Jumper; 5-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-405">www.wago.com/870-405</a> |
|   | <p><b>Item no.: 870-407</b><br/>                     Jumper; 7-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-407">www.wago.com/870-407</a> |
|   | <p><b>Item no.: 870-408</b><br/>                     Jumper; 8-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-408">www.wago.com/870-408</a> |
|  | <p><b>Item no.: 870-403</b><br/>                     Jumper; 3-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-403">www.wago.com/870-403</a> |
|   | <p><b>Item no.: 870-409</b><br/>                     Jumper; 9-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-409">www.wago.com/870-409</a> |
|   | <p><b>Item no.: 870-406</b><br/>                     Jumper; 6-way; insulated; light gray</p>   | <a href="http://www.wago.com/870-406">www.wago.com/870-406</a> |

Subject to changes. Please also observe the further product documentation!

|  |   |  |
|--|---|--|
|    | <b>Item no.: 870-433</b><br>Jumper; from 1 to 3; insulated; light gray  | <a href="http://www.wago.com/870-433">www.wago.com/870-433</a>                 |
|    | <b>Item no.: 870-435</b><br>Jumper; from 1 to 5; insulated; light gray  | <a href="http://www.wago.com/870-435">www.wago.com/870-435</a>                 |
|    | <b>Item no.: 870-410</b><br>Jumper; 10-way; insulated; light gray       | <a href="http://www.wago.com/870-410">www.wago.com/870-410</a>                 |
|    | <b>Item no.: 870-434</b><br>Jumper; from 1 to 4; insulated; light gray  | <a href="http://www.wago.com/870-434">www.wago.com/870-434</a>                 |
|    | <b>Item no.: 870-436</b><br>Jumper; from 1 to 6; insulated; light gray  | <a href="http://www.wago.com/870-436">www.wago.com/870-436</a>                 |
|    | <b>Item no.: 870-440</b><br>Jumper; from 1 to 10; insulated; light gray | <a href="http://www.wago.com/870-440">www.wago.com/870-440</a>                 |
|    | <b>Item no.: 870-437</b><br>Jumper; from 1 to 7; insulated; light gray  | <a href="http://www.wago.com/870-437">www.wago.com/870-437</a>                 |
|    | <b>Item no.: 870-439</b><br>Jumper; from 1 to 9; insulated; light gray  | <a href="http://www.wago.com/870-439">www.wago.com/870-439</a>                 |
|   | <b>Item no.: 870-438</b><br>Jumper; from 1 to 8; insulated; light gray  | <a href="http://www.wago.com/870-438">www.wago.com/870-438</a>                 |
|  | <b>Item no.: 870-406/020-000</b><br>Delta jumper; insulated; light gray | <a href="http://www.wago.com/870-406/020-000">www.wago.com/870-406/020-000</a> |

### Carrier rail

#### Mounting accessories

|  |   |  |
|--|---|--|
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored           | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|  | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored   | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|  | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|  | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored  | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |

Subject to changes. Please also observe the further product documentation!



**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-508](http://www.wago.com/210-508)



**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-113](http://www.wago.com/210-113)



**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-118](http://www.wago.com/210-118)



**Item no.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

[www.wago.com/210-112](http://www.wago.com/210-112)



**Item no.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-114](http://www.wago.com/210-114)



**Item no.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

[www.wago.com/210-115](http://www.wago.com/210-115)



**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)

#### Marking accessories

##### Marking strip



**Item no.: 709-196**

Marking strips; for laser printer; translucent

[www.wago.com/709-196](http://www.wago.com/709-196)



**Item no.: 709-178**

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

[www.wago.com/709-178](http://www.wago.com/709-178)



**Item no.: 709-177**

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent

[www.wago.com/709-177](http://www.wago.com/709-177)

##### Marker



**Item no.: 2009-115/000-002**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-115/000-002](http://www.wago.com/2009-115/000-002)



**Item no.: 2009-115/000-007**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-115/000-007](http://www.wago.com/2009-115/000-007)



**Item no.: 2009-115/000-017**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/2009-115/000-017](http://www.wago.com/2009-115/000-017)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27














32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

|   |   |  |
|---|---|--|
|    | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a> |
|    | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a> |
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|   | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|  | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|  | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|  | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|  | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white               | <a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>                 |
|   | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue                                    | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a>   |
|   | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                                    | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a>   |

Subject to changes. Please also observe the further product documentation!





**Item no.: 248-501/000-002**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)



**Item no.: 248-501/000-012**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)



**Item no.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-017**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)



**Item no.: 248-501/000-005**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Item no.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Item no.: 248-501/000-023**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Item no.: 793-5501/000-007**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/793-5501/000-007](http://www.wago.com/793-5501/000-007)



**Item no.: 793-5501/000-012**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/793-5501/000-012](http://www.wago.com/793-5501/000-012)



**Item no.: 793-5501/000-017**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/793-5501/000-017](http://www.wago.com/793-5501/000-017)



**Item no.: 793-5501/000-023**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/793-5501/000-023](http://www.wago.com/793-5501/000-023)

Subject to changes. Please also observe the further product documentation!



**Item no.:** 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/793-5501/000-024](http://www.wago.com/793-5501/000-024)



**Item no.:** 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/793-501/000-002](http://www.wago.com/793-501/000-002)



**Item no.:** 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/793-501/000-007](http://www.wago.com/793-501/000-007)



**Item no.:** 793-501/000-017

WMB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/793-501/000-017](http://www.wago.com/793-501/000-017)



**Item no.:** 793-501/000-012

WMB marking card; as card; not stretchable; plain; snap-on type; orange


[www.wago.com/793-501/000-012](http://www.wago.com/793-501/000-012)



**Item no.:** 793-501/000-023

WMB marking card; as card; not stretchable; plain; snap-on type; green


[www.wago.com/793-501/000-023](http://www.wago.com/793-501/000-023)



**Item no.:** 793-501/000-006

WMB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/793-501/000-006](http://www.wago.com/793-501/000-006)



**Item no.:** 793-501/000-005

WMB marking card; as card; not stretchable; plain; snap-on type; red


[www.wago.com/793-501/000-005](http://www.wago.com/793-501/000-005)



**Item no.:** 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white


[www.wago.com/793-501](http://www.wago.com/793-501)



**Item no.:** 793-501/000-024

WMB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/793-501/000-024](http://www.wago.com/793-501/000-024)



**Item no.:** 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/793-5501/000-005](http://www.wago.com/793-5501/000-005)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.:** 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow [www.wago.com/793-5501/000-002](http://www.wago.com/793-5501/000-002)



**Item no.:** 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue [www.wago.com/793-5501/000-006](http://www.wago.com/793-5501/000-006)



**Item no.:** 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white [www.wago.com/793-5501](http://www.wago.com/793-5501)



**Item no.:** 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange [www.wago.com/2009-115/000-012](http://www.wago.com/2009-115/000-012)



**Item no.:** 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue [www.wago.com/2009-115/000-006](http://www.wago.com/2009-115/000-006)

## Insulation stop

Insulation stop



**Item no.:** 280-472

Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; black [www.wago.com/280-472](http://www.wago.com/280-472)



**Item no.:** 280-470

Insulation stop; 0.08 - 0.2 mm<sup>2</sup> "s" (0.14 mm<sup>2</sup> "f-st"); 5 pieces/strip; white [www.wago.com/280-470](http://www.wago.com/280-470)



**Item no.:** 280-471

Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray [www.wago.com/280-471](http://www.wago.com/280-471)

## Tool

Operating tool



**Item no.:** 210-657

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured [www.wago.com/210-657](http://www.wago.com/210-657)



**Item no.:** 210-658

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured [www.wago.com/210-658](http://www.wago.com/210-658)



**Item no.:** 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured [www.wago.com/210-720](http://www.wago.com/210-720)

## Downloads

### Documentation

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



### Bid Text

|                                |             |                |          |
|--------------------------------|-------------|----------------|----------|
| 870-540/281-411<br>X81 - Datei | 2019 Feb 19 | xml<br>3.3 kB  | Download |
| 870-540/281-411<br>doc - Datei | 2017 May 31 | doc<br>25.1 kB | Download |

### Additional Information

|   |  |               |          |
|---|--|---------------|----------|
| Technical Section<br>Technical explanations |  | pdf<br>2.2 MB | Download |
|---|--|---------------|----------|

### CAD/CAE-Data

#### CAD data

|                              |  |     |          |
|------------------------------|--|-----|----------|
| 2D/3D Models 870-540/281-411 |  | URL | Download |
|------------------------------|--|-----|----------|

#### CAE data

|                                   |  |     |          |
|-----------------------------------|--|-----|----------|
| EPLAN Data Portal 870-540/281-411 |  | URL | Download |
| WSCAD Universe 870-540/281-411    |  | URL | Download |
| ZUKEN Portal 870-540/281-411      |  | URL | Download |
| WSCAD Universe 870-540/281-411    |  | URL | Download |
| EPLAN Data Portal 870-540/281-411 |  | URL | Download |

### Environmental Product Compliance

#### Compliance Search


|  |  |     |          |
|--|--|-----|----------|
| Environmental Product Compliance 870-540/281-411<br>Component terminal block; double-deck; with diode 1N4007; anode, right side; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm <sup>2</sup> ; CAGE CLAMP®; 2,50 mm <sup>2</sup> ; gray |  | URL | Download |
|--|--|-----|----------|

### Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

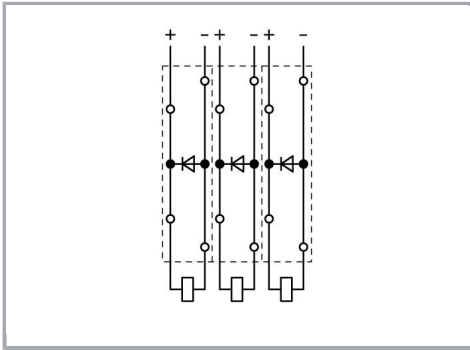

Recovery diodes can be created using the following terminal blocks:

870-540/281-410 or 870-540/281-411

Subject to changes. Please also observe the further product documentation!