

## Specification Sheet


Part Number: 596-00881

Made with UV-stable inks and materials for durability and weather resistance.

Polyester is resistant to chemicals and solvents and will remain legible in dirty environments.

High abrasion and scuff resistance for high-performance labeling.

Meets NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections.

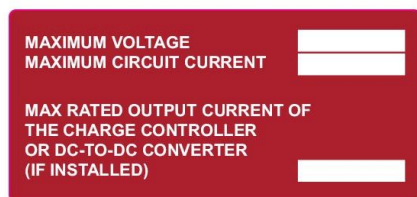

Solar Label, Printable, Maximum Voltage, 3.75" x 2.12", PET, Red, 10/pkg

**Article Number** 596-00881

**Type** DC201710

**Color** Red (RD)

**Quantity Per** pack

<b>Product Description</b>	HellermannTyton makes it easier than ever for solar installers to meet PV labeling codes. Solar Label Convenience Packs allow installers to quickly and economically purchase high quality preprinted NEC 2014, 2017 and 2020 code-compliant solar installation labels. Packaged in 10-count quantities to meet the needs of smaller scale solar installations and independent contractors, Solar Label Convenience Packs are available in HellermannTyton's most popular preprinted NEC 2014, 2017 and 2020 code-compliant solar label formats. Each Solar Label Convenience Pack contains 10 solar installation labels. Choose from a variety of regular and reflective preprinted labels. For enhanced durability, clear laminate overlay labels are also available in a convenience pack.
<b>Short Description</b>	Solar Label, Printable, Maximum Voltage, 3.75" x 2.12", PET, Red, 10/pkg
<b>Global Part Name</b>	DC201710-840/281-RD
<b>Technical Description</b>	Printable Solar Label-2017 Code, Maximum Voltage Label, 3.75" X 2.12", Polyester, Red, 10/pkg
<b>Width W (Imperial)</b>	3.75
<b>Width W (Metric)</b>	95.25
<b>Thickness T (Imperial)</b>	0.0025
<b>Thickness T (Metric)</b>	64.0
<b>Height H (Imperial)</b>	2.12
<b>Height H (Metric)</b>	53.80
<b>Width of Liner (Metric)</b>	98.29

<b>Width of Liner (Imperial)</b>	3.87
<b>Material</b>	Type 840/281, Polyester, UV-stabilized, clear polyester laminate (840/281)
<b>Material Shortcut</b>	840/281
<b>Adhesive</b>	Acrylic
<b>Halogen Free</b>	Yes
<b>Adhesive Operating Temperature</b>	-40°F to +302°F (-40°C to +150°C)
<b>Operating Temperature</b>	-40°F to +302°F (-40°C to +150°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>Certification/Specification</b>	NEC2017 UL 969 CSA 66956
<b>Warranty (US)</b>	Yes
<b>UL Recognized (US)</b>	Yes
<b>Package Quantity (Imperial)</b>	10
<b>Package Quantity (Metric)</b>	10

**Customs Number** 3919102055

**Labels per Column** 1

**Labels per Row** 1

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)