


R752I33305000M

Aliases (752I33305000M)

R752, Film, Metallized Polypropylene, General Purpose, 0.33 uF, 20%, 400 VDC, 85°C, Lead Spacing = 15mm

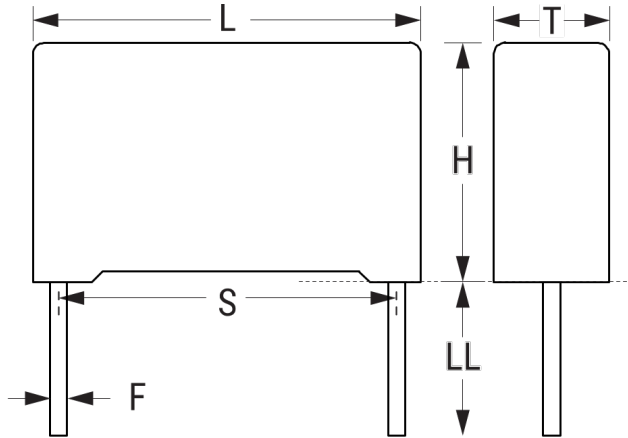

Click [here](#) for the 3D model.

Dimensions	
L	18mm +/-0.5mm
H	14.5mm +0.1mm
T	8.5mm +/-0.2mm
S	15mm +/-0.4mm
LL	25mm +2/-1mm
F	0.8mm +/-0.05mm

Packaging Specifications	
Packaging	Bulk, Bag
Packaging Quantity	500

General Information	
Series	R752
Dielectric	Metallized Polypropylene
Style	Radial
Features	Pulse, Capacitive Power Supply
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Component Weight	3.378 g

Specifications	
Capacitance	0.33 uF
Capacitance Tolerance	20%
Voltage AC	230 VAC
Voltage DC	400 VDC, 240 VDC (105C)
Temperature Range	-55/+105°C
Rated Temperature	85°C
Dissipation Factor	0.05% 1kHz, 0.08% 10kHz
Insulation Resistance	100 GOhms
Max dV/dt	400 V/us
Inductance	10 nH