

500mW 2% Zener Diodes

FEATURES

- Wide zener voltage range selection: 2.4V to 36V
- VZ Tolerance Selection of $\pm 2\%$
- Surface device type mountin
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Low voltage stabilizers or voltage references
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: 1206
- Molding compound: UL flammability classification rating 94HB
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 0.01g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
V_Z	2.4-36	V
Test current I_{ZT}	5	mA
P_{tot}	500	mW
V_F at $I_F=10mA$	1.5	V
T_J Max.	150	$^{\circ}C$
Package	1206	
Configuration	Single dice	



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}C$ unless otherwise noted)			
PARAMETER	SYMBOL	PART NUMBER	UNIT
Forward voltage @ $I_F=10mA$	V_F	1.5	V
Total power dissipation	P_{tot}	500	mW
Junction temperature range	T_J	-55 to +150	$^{\circ}C$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}C$

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	300	$^{\circ}C/W$

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER	MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT	
		$V_Z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	$I_R @ V_R$	
		V			mA	Ω	Ω	mA	μA	V
		Min.	Nom.	Max.		Max.	Max.		Max.	
BZS55B2V4	2V4	2.35	2.40	2.45	5	85	600	1.0	50	1.0
BZS55B2V7	2V7	2.65	2.70	2.75	5	85	600	1.0	10	1.0
BZS55B3V0	3	2.94	3.00	3.06	5	85	600	1.0	4	1.0
BZS55B3V3	3V3	3.23	3.30	3.37	5	85	600	1.0	2	1.0
BZS55B3V6	3V6	3.53	3.60	3.67	5	85	600	1.0	2	1.0
BZS55B3V9	3V9	3.82	3.90	3.98	5	85	600	1.0	2	1.0
BZS55B4V3	4V3	4.21	4.30	4.39	5	80	600	1.0	1	1.0
BZS55B4V7	4V7	4.61	4.70	4.79	5	70	600	1.0	0.5	1.0
BZS55B5V1	5V1	5.00	5.10	5.20	5	50	550	1.0	0.1	1.0
BZS55B5V6	5V6	5.49	5.60	5.71	5	30	450	1.0	0.1	1.0
BZS55B6V2	6V2	6.08	6.20	6.32	5	10	200	1.0	0.1	2.0
BZS55B6V8	6V8	6.66	6.80	6.94	5	8	150	1.0	0.1	3.0
BZS55B7V5	7V5	7.35	7.50	7.65	5	7	50	1.0	0.1	5.0
BZS55B8V2	8V2	8.04	8.20	8.36	5	7	50	1.0	0.1	6.2
BZS55B9V1	9V1	8.92	9.10	9.28	5	10	50	1.0	0.1	6.8
BZS55B10	10	9.80	10.00	10.20	5	15	70	1.0	0.1	7.5
BZS55B11	11	10.78	11.00	11.22	5	20	70	1.0	0.1	8.2
BZS55B12	12	11.76	12.00	12.24	5	20	90	1.0	0.1	9.1
BZS55B13	13	12.74	13.00	13.26	5	26	110	1.0	0.1	10.0
BZS55B15	15	14.70	15.00	15.30	5	30	110	1.0	0.1	11.0
BZS55B16	16	15.68	16.00	16.32	5	40	170	1.0	0.1	12.0
BZS55B18	18	17.64	18.00	18.36	5	50	170	1.0	0.1	13.0
BZS55B20	20	19.60	20.00	20.40	5	55	220	1.0	0.1	15.0
BZS55B22	22	21.56	22.00	22.44	5	55	220	1.0	0.1	16.0
BZS55B24	24	23.52	24.00	24.48	5	80	220	1.0	0.1	18.0
BZS55B27	27	26.46	27.00	27.54	5	80	220	1.0	0.1	20.0
BZS55B30	30	29.40	30.00	30.60	5	80	220	1.0	0.1	22.0
BZS55B33	33	32.34	33.00	33.66	5	80	220	1.0	0.1	24.0
BZS55B36	36	35.28	36.00	36.72	5	80	220	1.0	0.1	27.0

Notes:

1. The Zener Voltage (VZ) is tested under pulse condition of 10ms
2. The device numbers listed have a standard tolerance on the nominal zener voltage of $\pm 2\%$
3. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Taiwan Semiconductor representative
4. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an RMS value equal to 10% of the dc zener current

ORDERING INFORMATION

PART NO.	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
BZS55BXX (Note 1&2)	RX	G	1206	5K / 7" Reel
	RA			10K / 13" Reel

Notes:

1. "xxx" defines voltage from 2.4V (BZS55B2V4) to 36V (BZS55B36)
2. Whole series with green compound

EXAMPLE


EXAMPLE P/N	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
BZS55B36 RXG	BZS55B36	RX	G	Green compound

Not Recommended


CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)


Typical Forward Characteristics

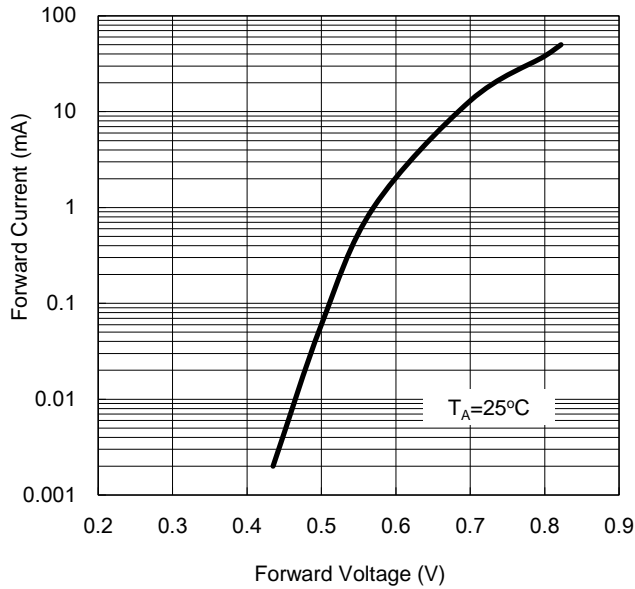


Zener Breakdown Characteristics

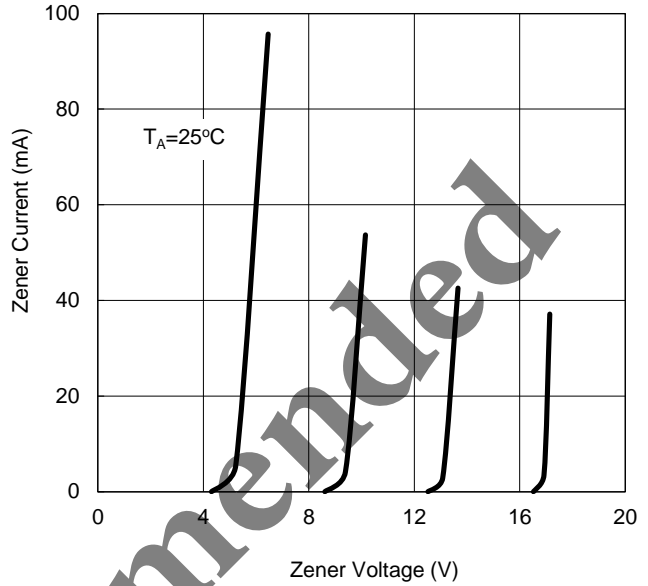

Zener Breakdown

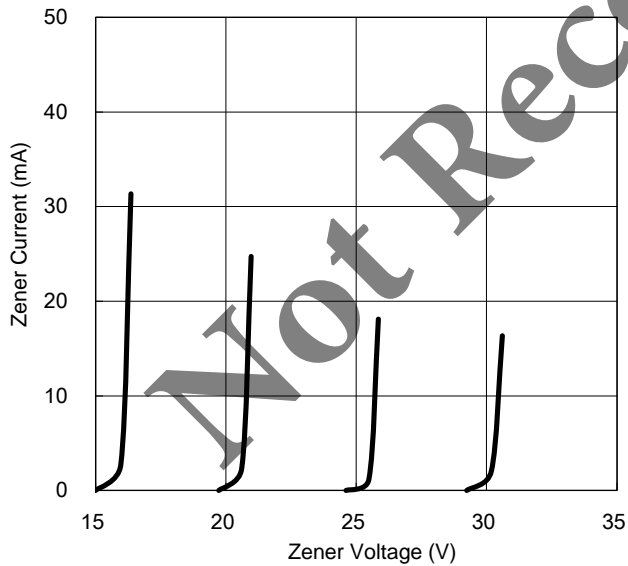


Admissible Power Dissipation Curve

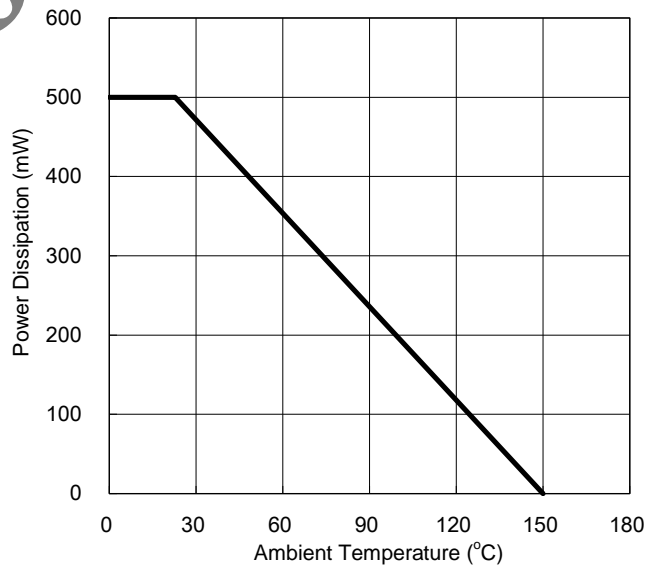

CHARACTERISTICS CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Typical Capacitance

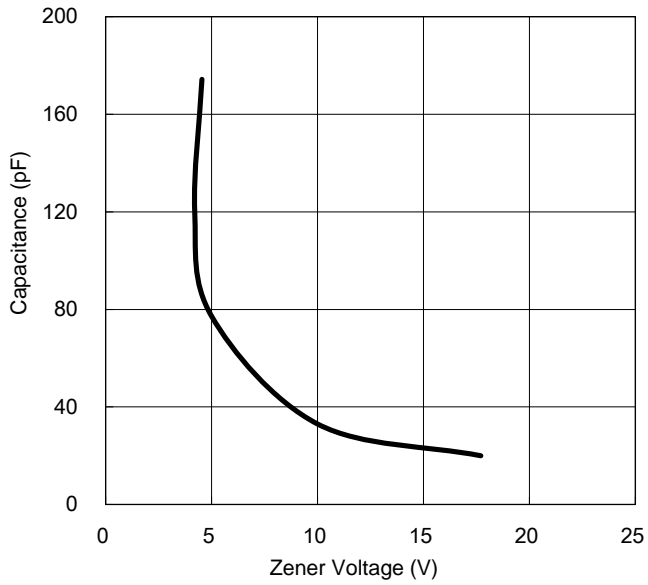


Not Recommended

PACKAGE OUTLINE DIMENSION

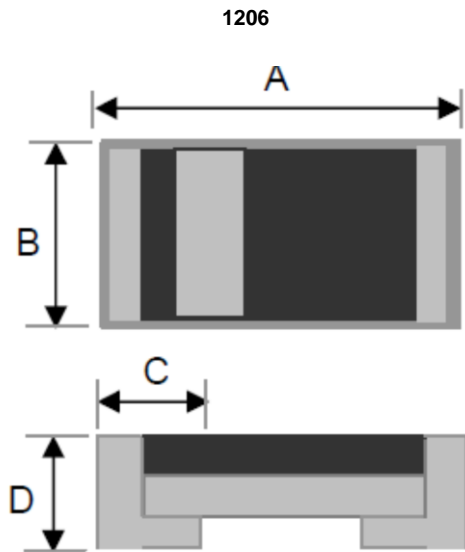

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	3.00	3.40	0.118	0.134
B	1.30	1.70	0.051	0.067
C	0.35	0.75	0.014	0.030
D	0.65	0.85	0.026	0.033

SUGGEST PAD LAYOUT

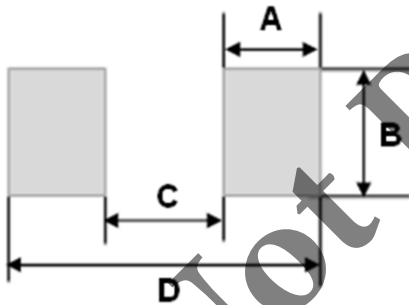

DIM.	Unit(mm)	Unit(inch)
	Typ	Typ
A	1.20	0.047
B	1.70	0.067
C	2.20	0.087
D	4.60	0.181

Not Recommended

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.