

PRODUCT DATASHEET CN11771_IRIS-M

IRIS-M

~25° medium beam with sublens and holder optimized for Luminus SST-50

TECHNICAL SPECIFICATIONS:

Dimensions Ø 38.0 mm
Height 29.6 mm
Fastening glue, pin
Colour black

Box size

Box weight 0 kg

Quantity in Box 348 pcs

ROHS compliant yes 10




MATERIAL SPECIFICATIONS:

Component	Туре	Material	Colour
IRIS	Single lens	PMMA	clear
IRIS-SST-HLD	Holder	PC	black
LEDILSTAR-SUB	Sublens	PC	




PRODUCT DATASHEET CN11771_IRIS-M

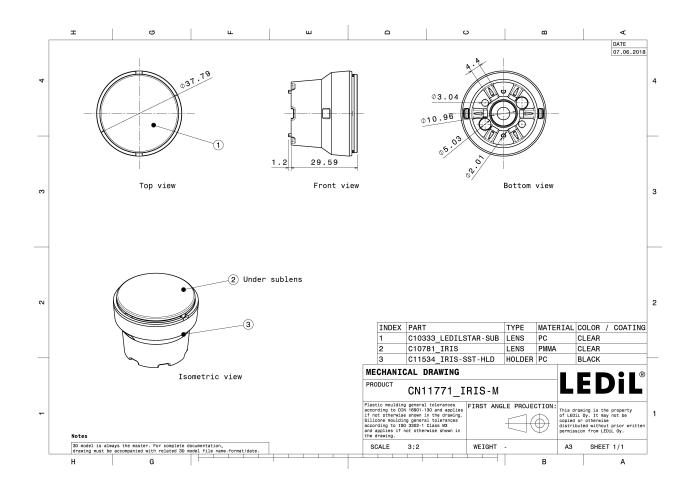

2/6

PRODUCT DATASHEET CN11771_IRIS-M

PHOTOMETRIC DATA (MEASURED):

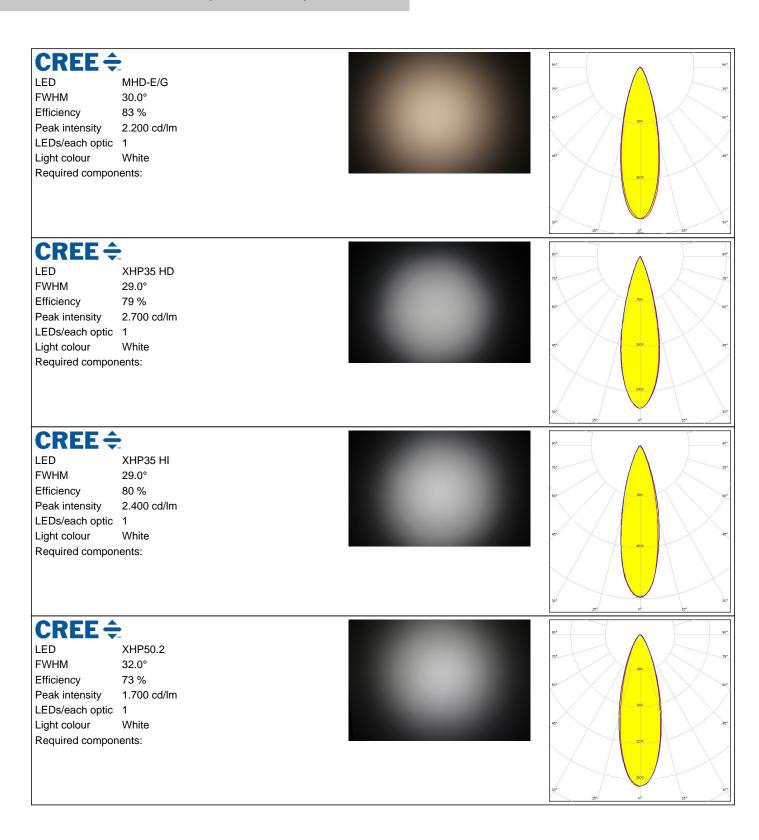


PRODUCT DATASHEET CN11771_IRIS-M


PHOTOMETRIC DATA (MEASURED):

CREE \$

LED XHP70 **FWHM** 30.0° Efficiency 83 % Peak intensity 2.100 cd/lm


LEDs/each optic 1 Light colour White Required components:





ELUMINUS

LED SST-90 **FWHM** 18.0° Efficiency % Peak intensity cd/lm LEDs/each optic 1 White Light colour Required components:



OSRAM Opto Semiconductors

LED Duris S10 **FWHM** 29.0° Efficiency 78 % Peak intensity 2.700 cd/lm

LEDs/each optic 1 Light colour White Required components:




OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM 29.0° Efficiency 79 % Peak intensity 3.100 cd/lm

LEDs/each optic 1 White Light colour Required components:







PRODUCT DATASHEET CN11771_IRIS-M

PHOTOMETRIC DATA (SIMULATED):




 LED
 XHP70.2

 FWHM
 30.7°

 Efficiency
 80 %

 Peak intensity
 2.110 cd/lm

LEDs/each optic 1 Light colour White Required components:



5/6



PRODUCT DATASHEET CN11771_IRIS-M

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy