

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

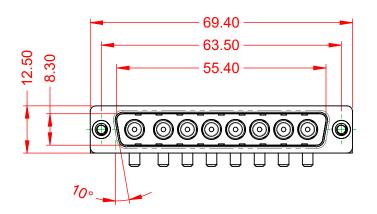



NOTES:

MATERIAL:

THERMOPLASTIC POLYESTER, UL94V-0 **HOUSING:**

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



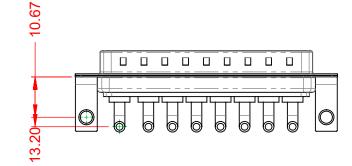

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	DRAWN: C.B	DATE: JAN. 01/2019		
	CHECKED:	DATE:		
1	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2		
	DRAWING NUMBER: 629-8W8-240-2N4			

629-8W8-240-2N4

PART NUMBER:



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

0000 2W2

(COO) o 2WK2

0 (.0.

5W1

000)0 3W3







11W1


000000 5W5





13W3





000000:::



17W5

00000000 8W8



13W6





21W4









43W2

47W1

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 629 COMBO ASSEMBLY						
DRAWN: C.B		DATE: JAN. 01/2019				
CHECKED:		DATE:				_
SCALE: N.T.S		SHEET	2	OF	2	
DRAWING NUMBER: 629-8W8-240-2N4			ISSUE	:		

629-8W8-240-2N4

PART NUMBER:

COMPLIANT