


COIL: @ 25°C	
RESISTANCE	720 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +200 °C
NOTES:	OPERATE 4 MS MAX. RELEASE 4 MS MA. CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

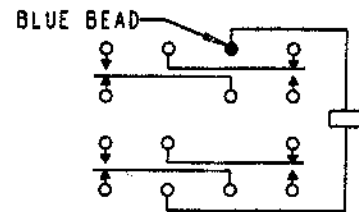

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS @ -65 TO +125C
	10,000 OPERATIONS @ +200C

DR. B.D. 1/14/02 CK 1/14/02 RB

CII Technologies
 advanced control electronic solutions

CUST. CII STD.	"3SBH" RELAY
CUST. NO. _____ REV. _____	

3SBH5004K2