


R75MD2150DQ40J

Aliases (75MD2150DQ40J)

R75, Film, Metallized Polypropylene, Automotive Grade, 0.015 uF, 5%, 400 VDC, 85°C, Lead Spacing = 7.5mm

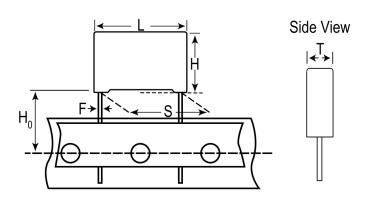

Click here for the 3D model.

Dimensions	
L	10mm +0.2/-0.5mm
Н	9mm +0.1/-0.5mm
Т	4mm +0.1/-0.5mm
S	7.5mm +/-0.4mm
НО	18.5mm +/-0.5mm
F	0.5mm +/-0.05mm

Packaging Specifications		
Packaging	Ammo, 360x340x59mm, Box	
Packaging Quantity	2100	

General Information		
Series	R75	
Dielectric	Metallized Polypropylene	
Style	Radial	
Features	Automotive Grade, Pulse	
RoHS	Yes	
Lead	Wire Leads	
Qualifications	AEC-Q200	
AEC-Q200	Yes	
Miscellaneous	Above 85C DC And AC Voltage Derating Is 1.25%/C.	

Specifications		
Capacitance	0.015 uF	
Capacitance Tolerance	5%	
Voltage AC	220 VAC	
Voltage DC	400 VDC	
Temperature Range	-55/+105°C	
Rated Temperature	85°C	
Dissipation Factor	0.04% 1kHz, 0.06% 10kHz, 0.25% 100kHz	
Insulation Resistance	100 GOhms	
Max dV/dt	1500 V/us	
Resistance	74.3 mOhms (100kHz)	
Ripple Current	1.75 Amps (100kHz 85C), 23 Amps (Peak)	
Inductance	8 nH	

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.