
Mounting Option


07-M3-0.5 Metric Threaded Inserts

Contact Detail

558-90 Degree Bend (Code 541 Contacts)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

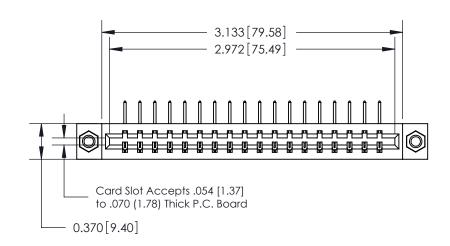

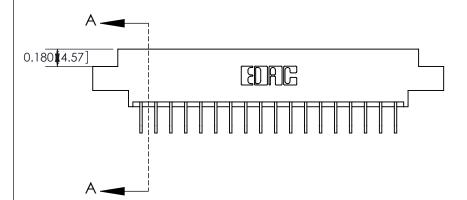


THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

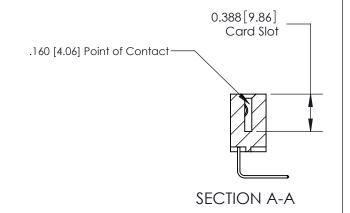

See Accompanying Page for:

- Bend Detail
- Mounting Options
- Features and Specifications

333 Series Card Edge Connector Part Number: 333-018-558-607



EDAC INC TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO. 333 ENG MAST		
	DRAWN: J.LEE	DATE: OCT. 14/09	
	CHECKED:	DATE:	
	SCALE: NTS	SHEET 1 OF 4	
)	DRAWING NUMBER	ISSUE	

NG NUMBER ISSUE

333 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER				
Contact Bend Detail	DRAWN: J.LEE	DATE: OC	DATE: OCT. 14/09		
Corridor bend Dendii		CHECKED:	DATE:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE: NTS	SHEET :	2 OF 4	
	TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., ANI ON THE PROPERTY OF EDA	DRAWING NUMBER	•	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	333 Assembl	У	1	

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

DRIGINAL

1



	333 Series Card Edge Connector			ACAD REFERENCE NO. 333 ENG MASTER			
	Mounting Options		DRAWN:	J.LEE	DATE: O	CT. 14/09	
			CHECKED:		DATE:		
		COOO EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET :	3 OF 4
	TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE	
	YOUR CONNECTION TO QUA	CANADA	MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	IRE OR SALE OF APPARATUS 333 Accembly 1