


VE1812K401R075

VE, Varistors, Low Voltage High Temperature, 100 V, 75 VAC, 120 V, 202 V, 5 A, 400 A, 5.8 J, 15 mW

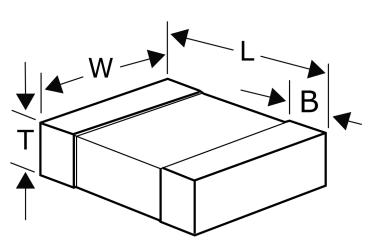

Click here for the 3D model.

Dimensions	,
Chip Size	1812
L	4.7mm +/-0.4mm
W	3.2mm +/-0.3mm
Т	1.9mm
В	0.5mm +/-0.25mm

Packaging Specifications		
Packaging	T&R	
Packaging Quantity	1000	

General Information		
Series	VE	
Туре	Varistors	
Style	SMD Chip	
Description	Surface Mount Varistors	
Features	Low Voltage High Temperature	
Termination	Nickel Tin	
RoHS	Yes	
Qualifications	IEC, UL, AEC-Q200	
AEC-Q200	Yes	

Constitution to the	
Specifications	
Voltage DC	100 VDC (25C)
Voltage AC	75 VAC
Temperature Range	-55/+150°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	120 VDC at 1 mA
Clamping Voltage	202 V
Clamping Current	5 A (8/20 us MAX)
Surge Current	400 A (8/20 us MAX)
Energy	5.8 J (10/1000 us MAX)
Capacitance	440 pF (1kHz)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.