


## R74NI1680DQ00J

Aliases (74NI1680DQ00J)

Not for New Design

R74, Film, Metallized Polypropylene, Automotive Grade, 6800 pF, 5%, 1300 VDC, 85°C, Lead Spacing = 15mm

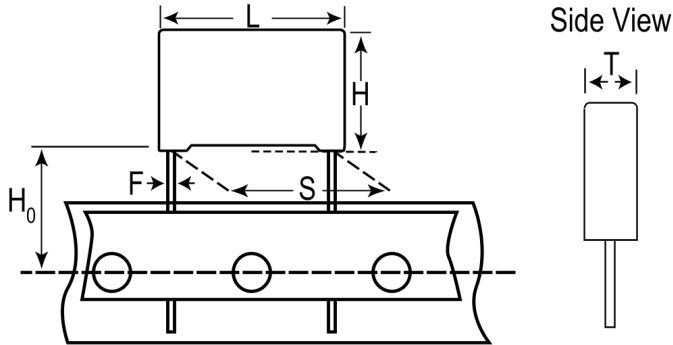

### General Information

|                  |  |
|------------------|--|
| Series           | R74  |
| Dielectric       | Metallized Polypropylene                         |
| Style            | Radial   |
| Features         | Automotive Grade, Pulse                          |
| RoHS             | Yes  |
| Lead             | Wire Leads                                       |
| Qualifications   | AEC-Q200   |
| AEC-Q200         | Yes  |
| Component Weight | 1.609 g  |
| Miscellaneous    | Above 85C DC And AC Voltage Derating Is 1.25%/C. |
| Notes            | Series Replaced by R75.                          |

Click [here](#) for the 3D model.

### Dimensions

|    |                  |
|----|------------------|
| L  | 18mm +0.3/-0.5mm |
| H  | 11mm +0.1/-0.5mm |
| T  | 5mm +0.2/-0.5mm  |
| S  | 15mm +0.6/-0.1mm |
| H0 | 18.5mm +/-0.5mm  |
| F  | 0.8mm +/-0.05mm  |

### Packaging Specifications

|                    |                         |
|--------------------|-------------------------|
| Packaging          | Ammo, 360x340x59mm, Box |
| Packaging Quantity | 800                     |

### Specifications

|                       |                                       |
|-----------------------|---------------------------------------|
| Capacitance           | 6800 pF                               |
| Capacitance Tolerance | 5%                                    |
| Voltage AC            | 400 VAC                               |
| Voltage DC            | 1300 VDC                              |
| Temperature Range     | -55/+105°C                            |
| Rated Temperature     | 85°C                                  |
| Dissipation Factor    | 0.01% 1kHz, 0.02% 10kHz, 0.08% 100kHz |
| Insulation Resistance | 100 GOhms                             |
| Max dV/dt             | 2000 V/us                             |
| Resistance            | 93.6 mOhms (100kHz)                   |
| Ripple Current        | 1.7 Amps (100kHz 85C), 14 Amps (Peak) |
| Inductance            | 10 nH                                 |