




PAEC End Caps Corrugated Conduit

Nylon cap snaps over un-terminated conduit ends to prevent damage to wires caused by rubbing against sharp conduit edges. For use with HelaGuard corrugated conduits.



Conduit Size		Euro Size	HellermannTyton Part Number	Manufacturer Reference Number	Dimensions							
IN.	MM	(NW)			A		B		C		D	
					in.	mm	in.	mm	in.	mm	in.	mm
3/8	16	12	PAEC0380	EC16B	3/8	16	0.41	10.5	0.75	19	0.72	18.2
1/2	21	17	PAEC0500	EC21B	1/2	21	0.59	15	0.75	19	0.93	23.7
3/4	28	23	PAEC0750	EC28B	3/4	28	0.79	20	0.87	22	1.23	31.2
1.00	34	29	PAEC1000	EC34B	1.00	34	0.98	25.5	0.91	23	1.46	37.1
1.25	42	36	PAEC1250	EC42B	1.25	42	1.26	32	0.94	24	1.78	45.2
1.50	54	48	PAEC1500	EC54B	1.50	54	1.71	43.5	0.98	25	2.25	57.1

Technical Properties and Performance	
Property	Rating
Material:	Nylon PA66
Application	Snaps on end of conduit to prevent cable damage from chaffing at the end cut
IP (Ingress Protection) rating	NA
Temperature Range	-50°C to +135°C
Color	Black
Thread Pattern	NA
Supplied with neoprene face seal washer	No
Suitable for fine or coarse pitch conduits	Yes
UL Recognized (File E229161)	No
UL Listed (File No. E247502)	No
UV Resistant	Yes
Halogen, Sulphur and Phosphorous free	Yes
Anti vibration and Tamper Resistant	No
Flammability: UL 94	NA
Country of Origin	United Kingdom

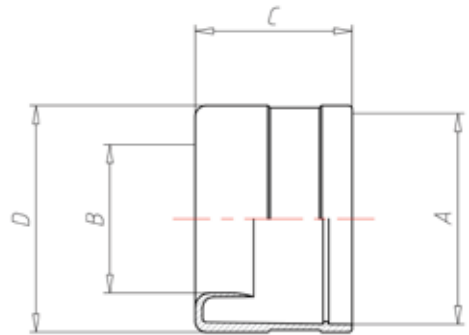

Warranty Policy HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses. Every effort is made to ensure accuracy and completeness when describing the technical properties of these products.