

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



(1)

ORIGINAL

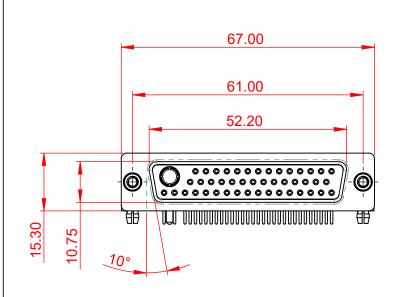





.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-47W1250-1T5		ISSUE
			PART NUMBER: 630-47W	1250-1T5	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

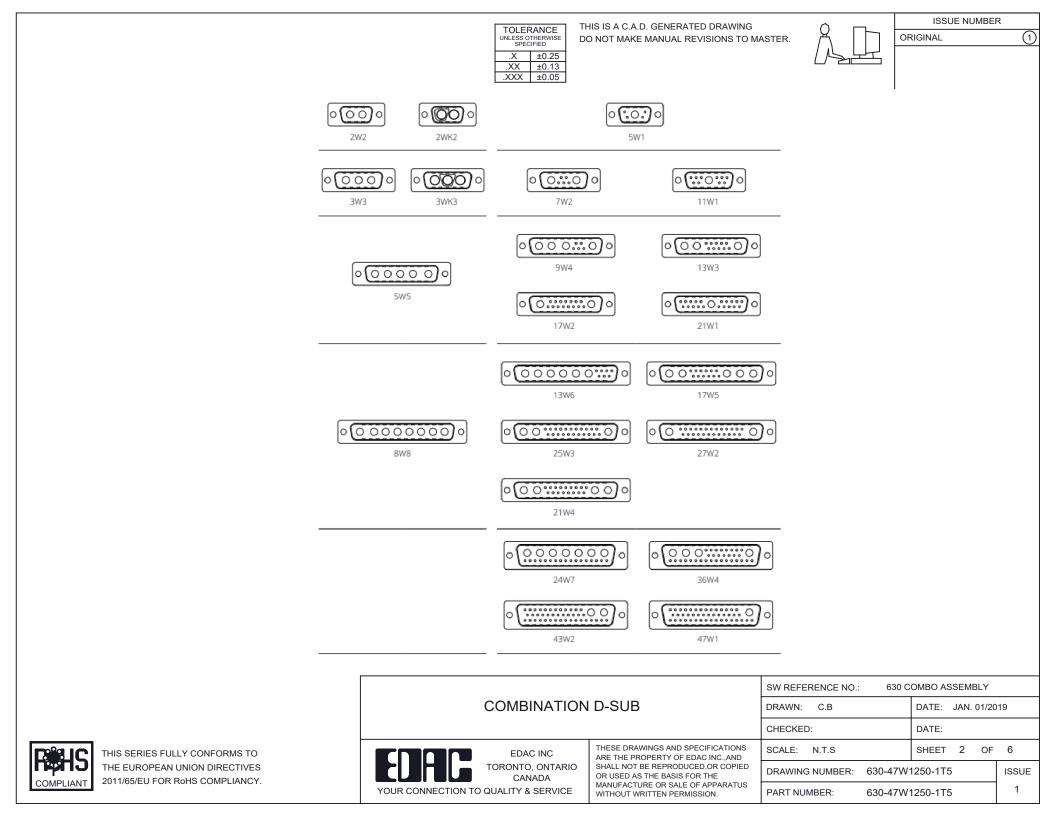



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** ORIGINAL

 $\overline{(1)}$ 



3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female



21W4 Male/Female

27W2 Male/Female



5W5 Male



PCB EDGE

8W8 Male



PCB EDGE




PCB EDGE


2.77 PCB EDGE

5W5 Female


COMPLIANT



8W8 Female



PCB EDGE




21W1 Male/Female



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
0	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4	
ES CY.		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-47W1250-1T5		ISSUE	
			PART NUMBER: 630-47W	1250-1T5	1	


CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



17W2 Male/Female

THIS SERIES FULLY CONFORMS T THE EUROPEAN UNION DIRECTIVE 2011/65/EU FOR RoHS COMPLIANC

O ES	
CY.	



THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.36

PCB EDGE

PCB EDGE

31.75

32.00

15.50

21.9

36W4 Female



13W6 Male





30.50

2.77

22.16

20.78

20.7

13.72

PCB EDGE

13W6 Female

13W3 Female

.X ±0.25 .XX ±0.13 .XXX ±0.05

## 43W2 Female




17W5 Male


COMPLIA














	-				
	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	019
		CHECKED:	DATE:		
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC TORONTO, ONTARIO	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 4 OF	4
		MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 630-4	7W1250-1T5	ISSUE
2011/65/EU FOR RoHS COMPLIANCY.			PART NUMBER: 630-4	7W1250-1T5	1