



- PoE Plus applications with 700mA current capability
- Compliant to IEEE802.3at / ANSI X3.263
- Polarity: 1-48, 5-44, 7-42, 11-38, 13-36, 17-32, 19-30, 23-26 In-Phase
- LL: 0.5µH Max @ 100KHz, 0.2V
- DCR: 0.9Ω Max
- Operating Temp: 0°C to +70°C

Electrical Specifications @ 25°C


Part Number	OCL(µH Min) @ 100kHz, 0.2V	Turns Ratio chip: cable (±5%)	Insertion Loss (dB Max)	Return Loss (dB Min)				
	With 8mA DC Bias			0.3-30MHz	40MHz	50MHz	60-80MHz	100MHz
AGSC-4806PS	350	1CT:1CT	-1.0	-18	-14.4	-13.1	-12	-10

Electrical Specifications @ 25°C

Part Number	Common Mode Rejection (dB Min)			Cross Talk (dB Min)			Isolation HI-POT (Vrms) 60S
	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	
AGSC-4806PS	-40	-35	-30	-40	-35	-30	1500

All specifications subject to change without notice.

MECHANICAL

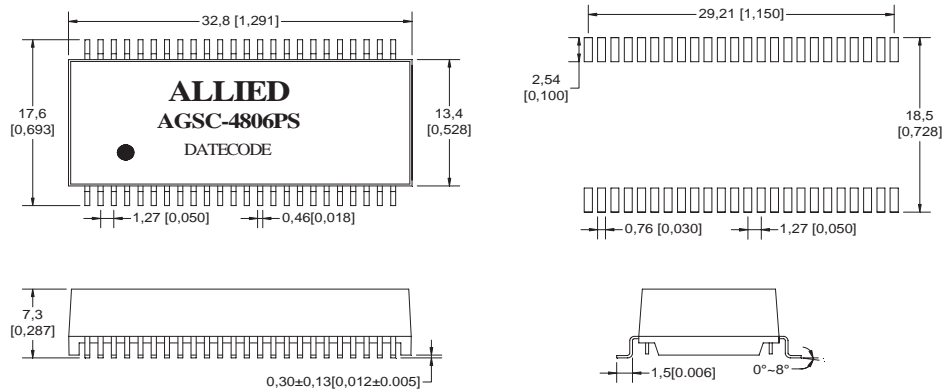

Dimensions:mm(inch)

Unless otherwise specified, all tolerances are ±0.25(0.010)

SCHEMATICS

