

6

5

4

3

2



1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE / NON-RETURNABLE

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/1/16	
A		UPDATE DRAWING	6/20/19	AY/KC

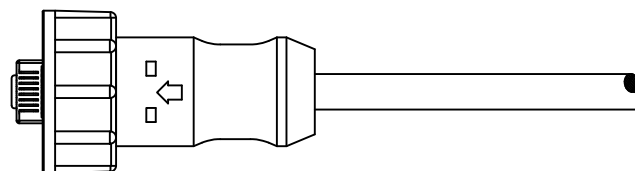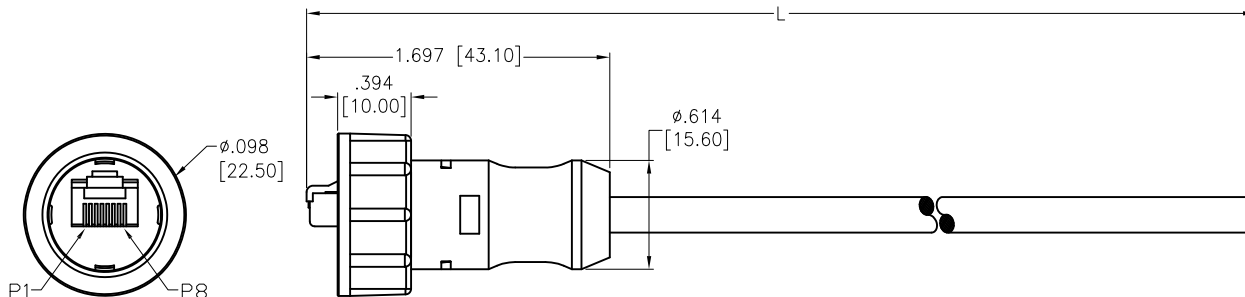

1	Orange/White
2	Orange
3	Green/White
4	Green
5	Blue
6	Blue/White
7	Brown/White
8	Brown
SHELL	Drain

SD-RPC-PTBL-CXX-XFT  
 7=IP67 A=CAT.5E

PART NO.	L
SD-RPC-PTBL-CXX-3FT	36"±1.80" [914.4±45.72mm]
SD-RPC-PTBL-CXX-6FT	72"±3.60" [1828.8±91.44mm]
SD-RPC-PTBL-CXX-10FT	120"±6.000" [3048±152.4mm]

HOLD	PVC OVERMOLDING.	BLACK
GASKET	SANTOPRENE.	BLACK
LOCK NUT	NYLON+GF.	BLACK
CABLE	CAT.5E 24AWGX4P FTP	BLACK
PLUG	RJ45 8P8C SHIELDED PLUG. .6U" GOLD PLATED.	
PART NAME	DESCRIPTION	COLOR

**SPECIFICATIONS:**  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES

.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

APPROVALS		DATE
DRAWN	HR	9/1/16
CHECKED	CK	9/1/16
APPROVED		

**ADAM TECH**  
 INTERCONNECTS  
 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE			
WATERPROOF CONNECTOR, RJ45 8P8C PLUG, C SIZE SOCKET, SCREW TYPE, MOLDING CABLE			
SIZE	PART NO.	REV.	
X	SD-RPC-PTBL-CXX-XFT	A	
REF:	S00200T	SCALE:	NTS
		SHEET	1 OF 1

6

5

4

3

2

1