

MPG Series Mustang Pushbutton 15/32" Bushing "6 Amp" Wire Lug or PC Termination



MATERIAL SPECIFICATIONS:

ContactsSilver clad copper with gold flash
Case MaterialThermoset
TerminalsCopper with gold flash finish
Terminal SealMolded in

TYPICAL PERFORMANCE CHARACTERISTICS:

Contact Rating6 A @ 125 VAC, 3 A @ 250 VAC
Initial Contact Resistance.....10 Milliohms max.
Contact TimingBreak-before-make
Insulation Resistance1,000 Megohms min.
Dielectric Strength1,500 Volts RMS @ sea level
Actuation Force1.3 to 2.7 lbs.
Actuator Travel138" (3.51)
Life Expectancy50,000 Actuations

ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature-4°F to +176°F (-20°C to +80°C)
Storage Temperature-40°F to +176°F (-40°C to +80°C)
Solder Heat ResistanceSee page M6-7


SPDT

Black Cap supplied.

D



MPG106D

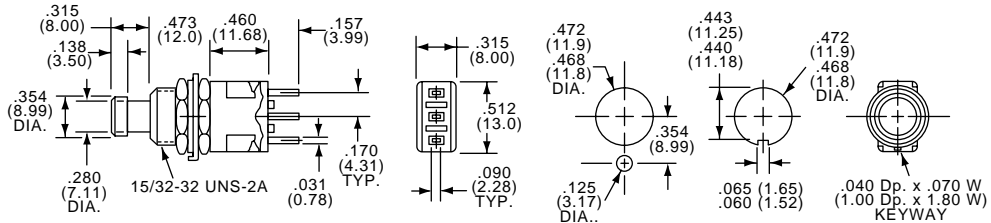

Model	Type	Act. Code	P. M9	Action	Terminals
MPG106D	SPDT	23		Push on/Push off	Wire Lug
MPG106F	SPDT	19		Momentary	Wire Lug


Other cap colors available, order separately. (See Cap Model C9 on Page D45.)

DPDT

Black Cap supplied.



MPG206NPC

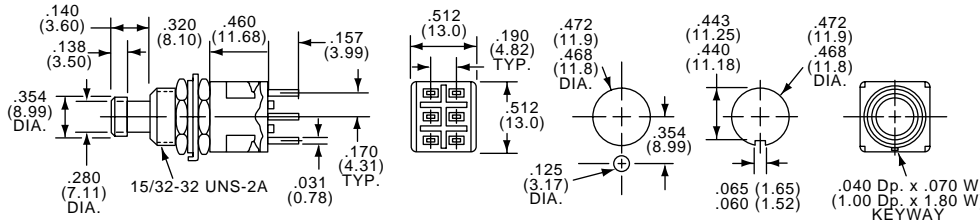

Model	Type	Act. Code	P. M9	Action	Terminals
MPG206N	DPST	24		Push on/Push off	Wire Lug
MPG206R	DPST	20		Momentary	Wire Lug
MPG206NPC	DPDT	24		Push on/Push off	PC
MPG206RPC	DPDT	20		Momentary	PC


Other cap colors available, order separately. (See Cap Model C9 on Page D45.)

3PDT

Black Cap supplied.



MPG306D

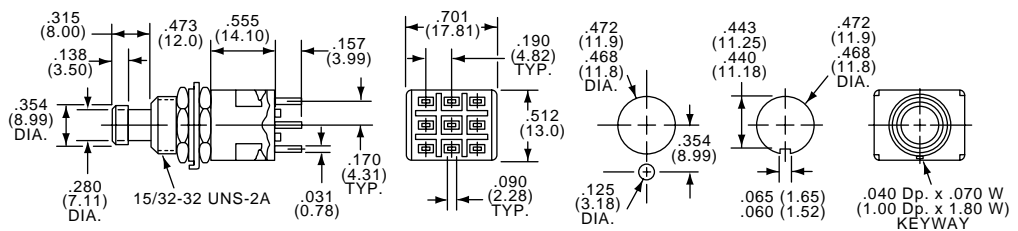

Model	Type	Act. Code	P. M9	Action	Terminals
MPG306D	3DPT	25		Push on/Push off	Wire Lug
MPG306F	3PDT	21		Momentary	Wire Lug


Other cap colors available, order separately. (See Cap Model C9 on Page D45.)

4PDT

Black Cap supplied.



MPG406N

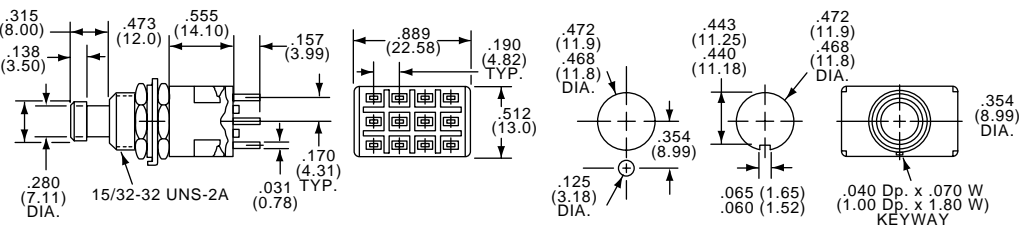

Model	Type	Act. Code	P. M9	Action	Terminals
MPG406N	4PDT	26		Push on/Pushoff	Wire Lug
MPG406R	4PDT	22		Momentary	Wire Lug

Other cap colors available, order separately. (See Cap Model C9 on Page D45.)

Thomas & Betts

Quality & Innovation From **AUGAT** Name Brand Products

D38

Thomas & Betts
8155 T&B Blvd.
Memphis, TN 38125
(901) 252-5000 FAX (901) 252-1380