

Diode module, With 4 diodes, Individually switched, Diode type 1N 4007, Screw connection, Mounting type: Mounting rail TS 35

Business data

Article number	6318.2
Article name	DM 4
GTIN (EAN)	4044211073442
Accessories	Without cover
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	42.1 g
Weight per piece (including packaging)	56 g
Unit of weight	G
Customs number	85411000
Country of origin	NL
Prio-Article	6318.2
Product description	Diode module

Technical data

Dimensions

Length	87 mm
Width	27 mm
Height TS 35/7.5	57 mm

Ratings

Overvoltage category	III
Contamination degree	2
Max. operating voltage AC/DC	250 V
Current load per channel, max.	1 A

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Max. operating voltage AC/DC	250 V
Current load per channel, max.	1 A
Number of channels	4

Further technical data

Number of channels	4
Working temperature, min.	-20 °C
Working temperature, max.	50 °C
Diode	1N4007
Diode on-state voltage	0.8 V
Diode reverse voltage	1000 V
Diode reverse current	5 uA

Technical data

Materials

Working temperature, min.	-20 °C
---------------------------	--------

Working temperature, max.	50 °C
---------------------------	-------

Environmental Product Compliance

REACH Conform	yes
---------------	-----

REACH Reference date	2022-01-17
----------------------	------------

REACH Candidate Substance Note	No
--------------------------------	----

RoHS Conform	yes
--------------	-----


Approvals

Standards and regulations

Standards / specifications

DIN VDE 0110 / EN 50178

Media

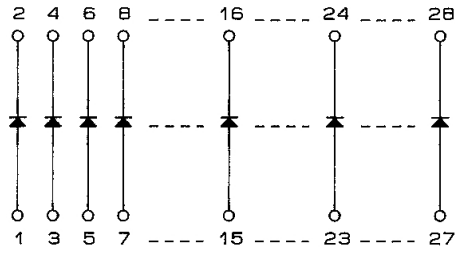

Accessories
