


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/13/11	
B		UPDATE DRAWING	4/13/18	AY/MY



**SPECIFICATIONS:**  
 Material: Phosphor Bronze  
 Plating: Tin plated  
 Electrical:  
 Rated Voltage: 250V AC/DC  
 Rated Current: 3A AC/DC  
 Contact Resistance: 20 mohms max.  
 Insulation resistance: 1,000 Mohms min.  
 Withstand voltage: 1000V AC for 1 minute.  
 Mechanical:  
 Wire Range: 22-28 AWG.  
 Thickness: 0.2mm  
 Temperature Rating:  
 -25°C to +85°C  
 Environmental:  
 Lead free, RoHS Compliant

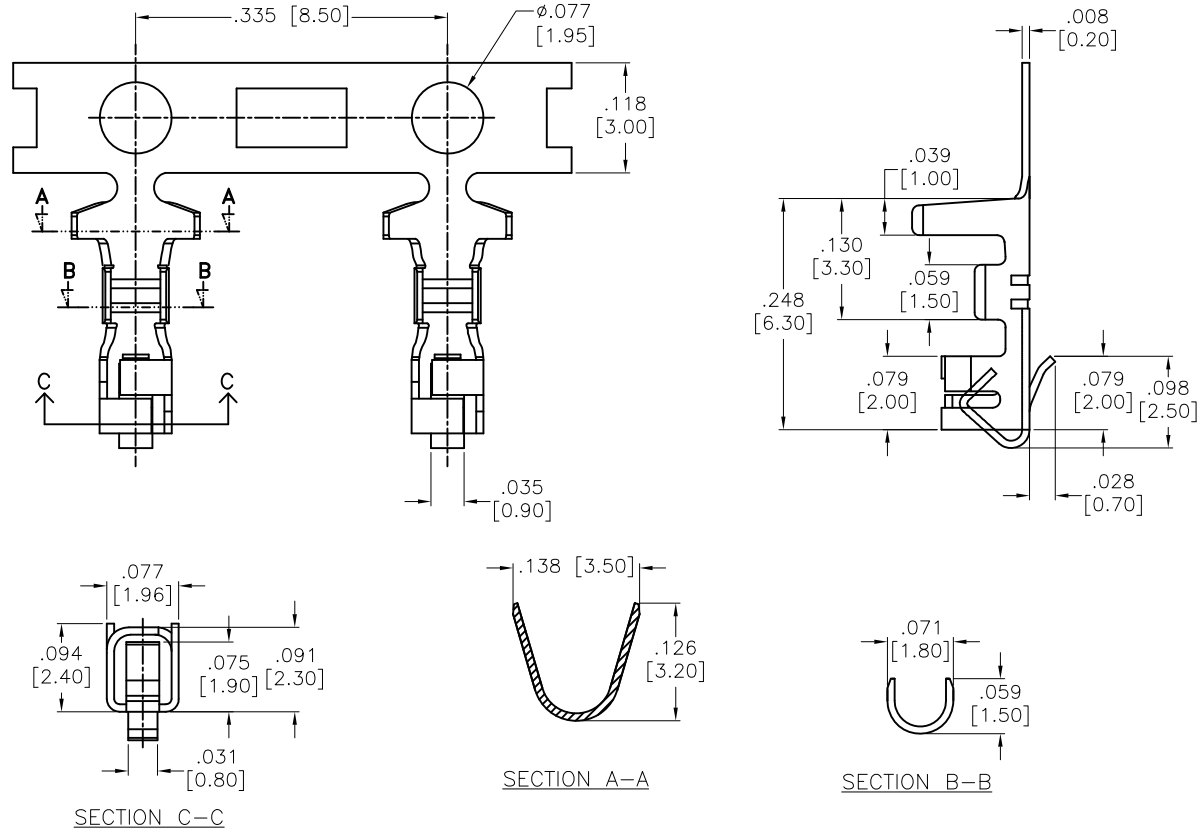

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	AY	7/13/11	
CHECKED	AH	7/13/11	
APPROVED			

**ADAM TECH**  
 INTERCONNECTS  
 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE .098 [2.50] CRIMP TERMINAL			
SIZE X	PART NO. 25CTB-R	REV. A	
REF: S00124T	SCALE: NTS	SHEET 1 OF 1	