


T351C106K010AT7301

Aliases (T351C106K010ATTR)

T351, Tantalum, MnO2 Tantalum, Commercial Grade, 10 uF, 10%, 10 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 2.54mm

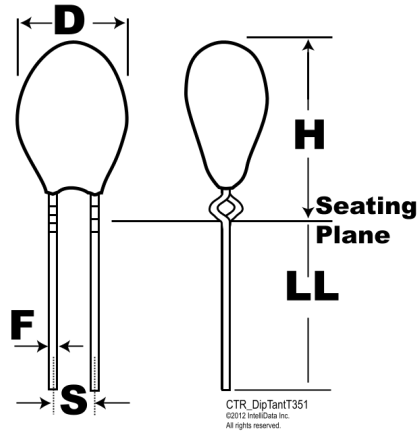

Click [here](#) for the 3D model.

Dimensions

| | |
|----|------------------|
| D | 5mm |
| H | 10.7mm |
| S | 2.54mm +/-0.38mm |
| LL | 4.75mm +/-0.81mm |
| F | 0.5mm +/-0.05mm |

Packaging Specifications

| | |
|--------------------|------------|
| Packaging | T&R, 305mm |
| Packaging Quantity | 1500 |

General Information

| | |
|-------------|---|
| Series | T351 |
| Dielectric | MnO2 Tantalum |
| Style | Radial |
| Description | Radial, Solid Tantalum, Conformal, Dipped |
| Features | Low Leakage |
| RoHS | Yes |
| Termination | Tin |
| AEC-Q200 | No |
| Notes | Longest Lead Is Positive. |

Specifications

| | |
|-----------------------|--|
| Capacitance | 10 uF |
| Capacitance Tolerance | 10% |
| Voltage DC | 10 VDC (85C), 7 VDC (125C), 0.1 VDC (125C Reverse) |
| Temperature Range | -55/+125°C |
| Dissipation Factor | 6% |
| Leakage Current | 0.8 uA |