

Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X7R 0.47uF 25V(0603B474K250CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @25V, 120sec)

Item	Spec
Cap [uF]	0.47 (±10%)
DF	≤ 10%
IR [G-ohm]	≥ 1.06


3. Impedance/ESR-Frequency

(Equipment: 4990A)

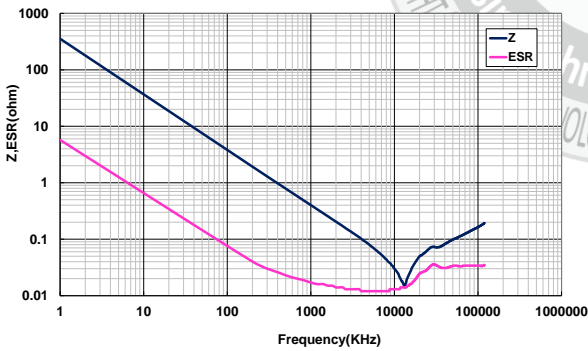

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

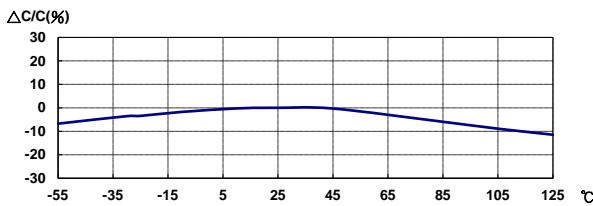

5. Temperature Rise – Ripple Current


(Equipment: 11810)

Over the measure limit

6. Capacitance – DC Voltage Characteristics

Equipment: E4980A;DC charge 60±5sec

12.5V: -25.52% ; 25V: -65.95%

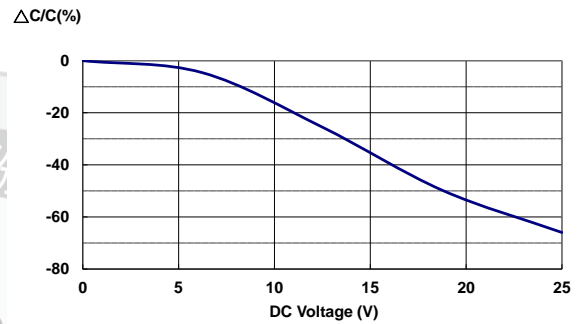

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

