

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0783472044](#)
Status: **Active**
Overview: Impact Backplane Connector and Cable Assembly System
Description: Impact 3 Pair, Right-Angle Power Header, 2 Modules with Right Hold-Down, Press-Fit, Module 1: P1 & P2, Blade Length 5.70mm & 6.90mm; Module 2: P1 & P2 Blade Length 5.70mm & 6.90mm, LCP, Glass Filled UL94-V0, Black, Tray Packaging, Lead-Free

Documents:

3D Model	Application Specification AS-76060-9997-001 (PDF)
3D Model (PDF)	Packaging Specification PK-78347-002-001 (PDF)
Drawing (PDF)	Symbol Footprint Data SYM-78347-2044-001 (PDF)
Product Specification PS-78213-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


UL E29179

General

Product Family	Backplane Connectors
Series	78347
Application	Conventional, Coplanar
Application Tooling Documents	TM-622018799-001
Component Type	Power Header
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	884982913394

Physical

Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	Yes
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	12.801/g
Number of Columns	N/A
Number of Pairs	3
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	5.20mm
Pitch - Termination Interface	2.00mm, 3.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No

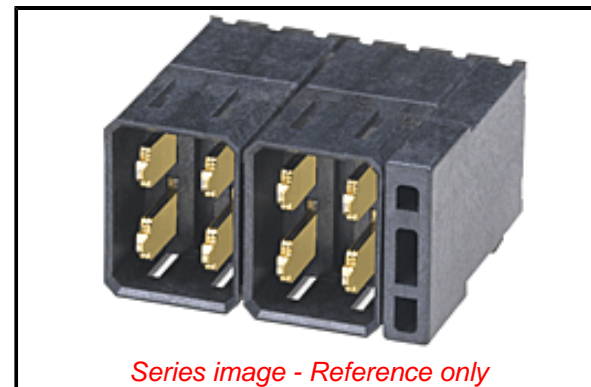

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[78347](#) Series

Mates With

[78212](#) Impact Vertical Receptacle, [78348](#) Right Angle Receptacle

Temperature Range - Operating -55° to +85°C
Termination Interface: Style Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 15.0A
Data Rate N/A
Shield Type N/A
Shielded No
Voltage - Maximum 250V

Solder Process Data

Lead-free Process Capability N/A

Material Info

Reference - Drawing Numbers

Application Specification AS-76060-9997-001
Packaging Specification PK-78347-002-001
Product Specification PS-78213-001-001
Sales Drawing SD-78347-001-001
Symbol/Footprint Data SYM-78347-2044-001

This document was generated on 09/21/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION