


REVISIONS				
変更				
P	LTR	DESCRIPTION	DATE	DWN APVD
B1		ECO-20-006057	28APR2020	RR SH

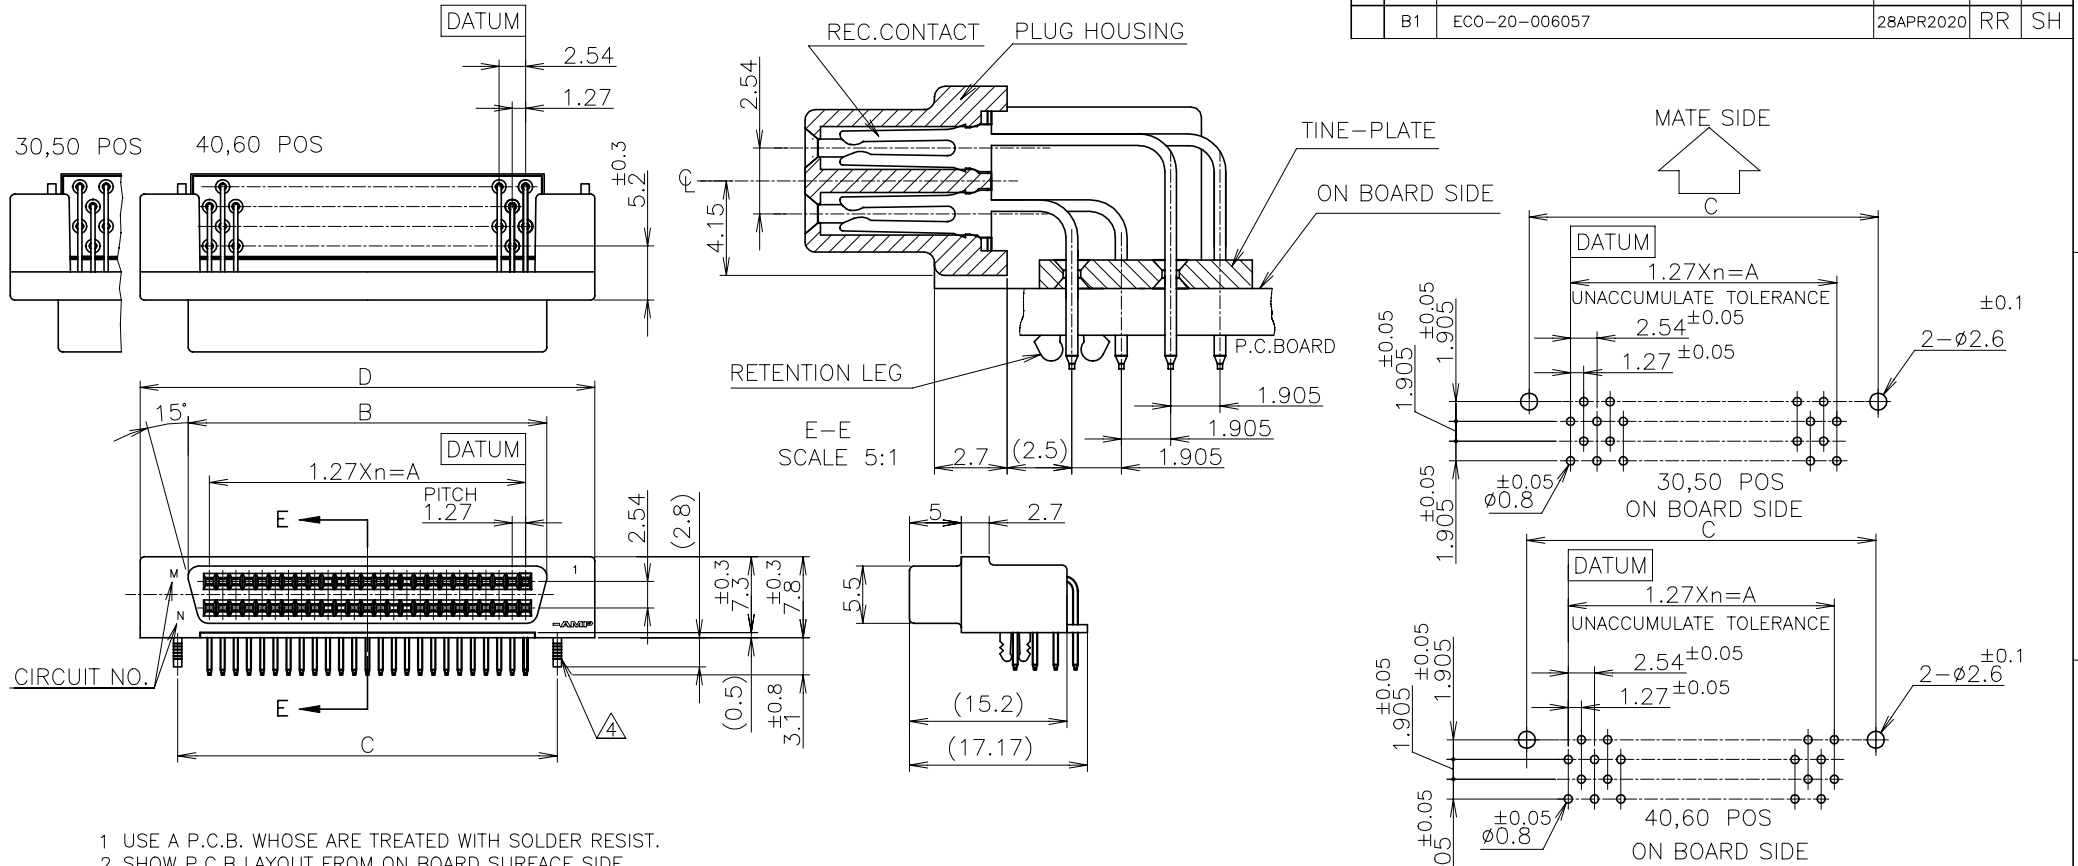

- 1 USE A P.C.B. WHOSE ARE TREATED WITH SOLDER RESIST.
  - 2 SHOW P.C.B LAYOUT FROM ON BOARD SURFACE SIDE.
  - 3 NUMBER THE CONTACT IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM "DATUM" SIDE.
- ⚠ THE RETENTION LEG IS A TEMPORARY FIX BEFORE SOLDERING
  - ⚠ HOUSING MATERIAL : P.B.T(UL94V-0) / BLACK
  - ⚠ CONTACT MATERIAL : PHO-BRONZE
  - ⚠ CONTACT FINISH : NICKEL 0.00127 MIN THK. OVERALL SELECTIVE GOLD 0.00076 MIN OR 0.0002 MIN. THK ON CONTACT AREA AND TIN 0.001 MIN THK. ON TINE AREA.
  - ⚠ RETENTION LEG FINISH:0.002 MIN TIN PL. OVER 0.001 MIN NICKEL PL.
  - ⚠ RETENTION LEG MATERIAL:BRASS
  - ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	POS	n	A	B	C	D	REMARK
6-	4	60	29	36.83	41.00	44.23	48.14
6-	3	50	24	30.48	34.65	37.88	41.72
6-	2	40	19	24.13	28.30	31.53	35.44
6-	1	30	14	17.78	21.95	25.18	29.09
6-	4	60	29	36.83	41.00	44.23	48.14
6-	3	50	24	30.48	34.65	37.88	41.72
6-	2	40	19	24.13	28.30	31.53	35.44
6-	1	30	14	17.78	21.95	25.18	29.09

GENERAL TOLERANCE  
一般公差

10 ≥ : ±0.2  
30 > 10: ±0.25  
100 ≥ > 30: ±0.3  
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
単位: 耗  
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
一般公差

0 PLC ±  
1 PLC ±  
2 PLC ±  
3 PLC ±  
4 PLC ±  
ANGLES ±

MATERIAL  
材料  
SEE NOTE ⚠⚠⚠

FINISH  
仕上  
SEE NOTE ⚠⚠

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 06JUL04  
CHK T. KAWAMAE 06JUL04  
APVD I. ENOMOTO 06JUL04

NAME  
名称  
PLUG ASSY (HORIZONTAL / W/LEG)  
AMPLIMITE .050 SERIES I B-TO-B CONN.

PRODUCT SPEC  
製品規格  
108-60036

APPLICATION SPEC  
取付適用規格

WEIGHT

CUSTOMER DRAWING

SCALE 2:1  
尺度

SHEET 1 OF 1

REV B1