

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

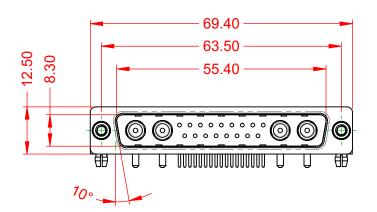



## NOTES:

MATERIAL:

**HOUSING:** THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

**OPERATING TEMPERATURE:** -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 10A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms



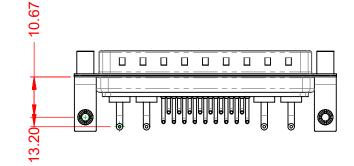

## **COMBINATION D-SUB**



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 629 COMBO ASSEMBLY		
DRAWN: C.B	DATE: JAN. 01/2019	
CHECKED:	DATE:	
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2	
DRAWING NUMBER: 629-21W4240-1N5 ISSUE		

629-21W4240-1N5

PART NUMBER:



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL** 

00 2W2

2WK2

o€: 5W1


00000

3W3










00000 5W5



9W4




17W2



000000::: 13W6

17W5







00\*\*\*\*\*\*\*00

21W4









43W2

47W1

**COMBINATION D-SUB** 



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 C	V REFERENCE NO.: 629 COMBO ASSEMBLY		
	DRAWN: C.B	DATE: JAN. 01/2019		
	CHECKED:	DATE:		
S	SCALE: N.T.S	SHEET 2 OF 2		
D	DRAWING NUMBER: 629-21W4	4240-1N5 ISSUE		

PART NUMBER: 629-21W4240-1N5