

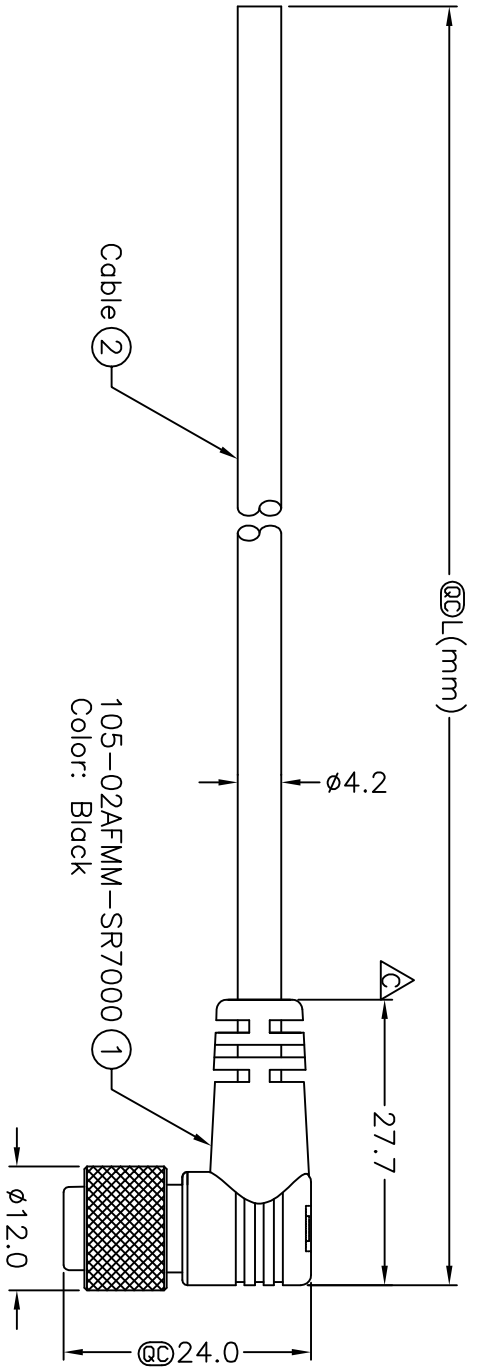



REV.	EQN. NO.	DATE	SIGN	DESCRIPTION
B	LEN-910061~64	2009/01/08	Vicky	Update the drawing.
C	LEN-0A0037~40	2010/09/03	Zhang Xing	Change Dimension.



105-02AFMM-SR7AXX

XX:01~99Meters


01:01Meter

02:02Meters

99:99Meters

Cable Length(L):01~99Meters

- Notes:
- * @ Important Dimension.
 - * Waterproof Rate: IP67.
 - * Connector: Nylon+GF,Black.
 - * Male Pin: Copper Alloy,Gold Plated.
 - * Cable: UL2464 24AWG*2C+Talc,Black, PVC Jacket,UV Resistant,OD=4.2mm.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

Pin No.	Color	Wire Color
2	Black	黑
1	Red	紅
Conn.	Wire Color	

UNIT:mm



TOLERANCE
±0.5 mm

TITLE
M10.5 Conn
Cable Screw 2P F Conn M Pin

SCALE	SHEET	OF	1
Free	1	OF	1

REV. C SIZE A4 : Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DATE
	105-02AFMM-SR7AXX	ALTW	2010/09/03

DRAWN BY Zhang Xing DATE 2010/09/03

CHECKED BY Tina DATE 2010/09/03

APPROVED BY Can DATE 2010/09/03