
Mounting Option


07-M3-0.5 Metric Threaded Inserts


Contact Detail

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

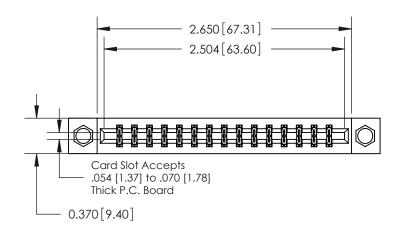

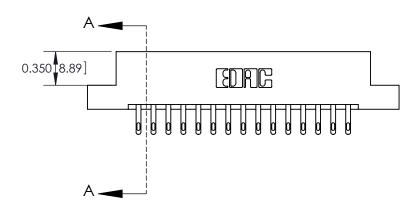

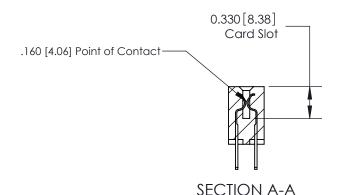

See Accompanying Pages for:

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**

837 Series High Temp Card Edge Connector Part Number: 887-030-500-207



YOUR CONNECTION TO QUALITY & SERVICE

| ACAD REFERENCE NO | 837 ENG MASTER | | | |
|-------------------|-------------------------|--|--|--|
| DRAWN: J.LEE | DATE: OCT. 06/09 | | | |
| CHECKED: | DATE: | | | |
| SCALE: NTS | SHEET 1 OF 4 | | | |
| DRAWING NUMBER | ISSUE | | | |

837 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



| 837 Series High Temp Card Edge Connector Contact Bend Detail | | ACAD REFERENCE NO. 837 ENG MASTER | | | | |
|---|--|-----------------------------------|--------------|------------------|--|--|
| | | DRAWN: J.LEE | DATE: OC | DATE: OCT. 06/09 | | |
| | | CHECKED: | DATE: | | | |
| EDAC INC | | SCALE: NTS | SHEET 2 OF 4 | | | |
| TORONTO, ONTARIO | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER | • | ISSUE | | |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS | 837 Assembly | | 1 | | |





Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| | 837 Series High Temp Card Edge Connector | | ACAD REFERENCE NO. 837 ENG MASTER | | | |
|-----------------------------|--|--|-----------------------------------|-------------|-----------|--------|
| Features and Specifications | | DRAWN: | J.LEE | DATE: OC | CT. 06/09 | |
| | redicies and specifications | | CHECKED: | | DATE: | |
| | | OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | SCALE: | NTS | SHEET . | 4 OF 4 |
| | TORONTO, ONTARIO | | DRAWING | NUMBER | | ISSUE |
| | YOUR CONNECTION TO QUALITY & SERVICE | | 8 | 37 Assembly | | 1 |