


Data sheet | Item number: 857-162

Basic solid-state relay; Nominal input voltage: 60 VDC; Output voltage range: 0 ... 24 VDC; Limiting continuous current: 3 A



www.wago.com/857-162

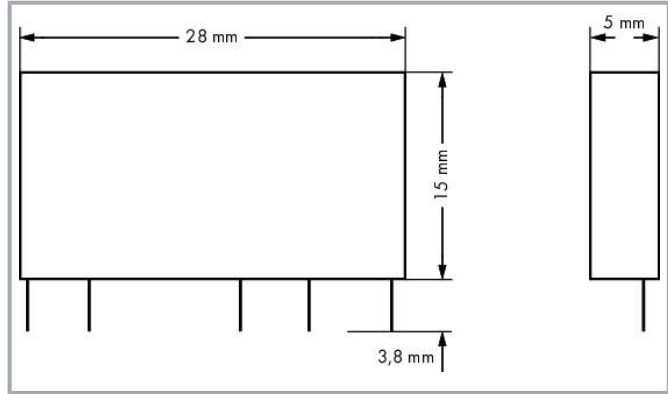

Similar to picture

Data

Notes

Note

Optocouplers and solid state relays are designed for use in signal processing networks, which are not supplied by the low-voltage power supply networks.

Technical data

Control Circuit

Nominal input voltage U_N	DC 60 V
Input voltage range (low level)	DC 0 ... 10 V
Input voltage range (high level)	DC 35 ... 72 V
Nominal input current at U_N	3 mA

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Load circuit

Circuit type	2-wire connection
Limiting continuous current	3 A
Inrush current (resistive) max.	(AC) 15 A / 0.01 s
Nominal output voltage	DC 24 V
Output voltage range	DC 0 ... 30 V
Voltage drop at output (max.)	≤ DC 0.12 V
Leakage current at rated voltage	≤ 1 µA
Switching current (min.)	50 µA
Turn-on time	≤ 100 µs
Turn-off time	≤ 600 µs
Switching frequency	≤ 350 Hz

Safety and protection

Dielectric strength (control/load circuit) (AC, 1 min)	3.75 kVrms
--	------------

Physical data

Width	5 mm / 0.197 inches
Height from the surface	15 mm / 0.591 inches
Depth	28 mm / 1.102 inches

Mechanical data

Mounting type	Pluggable module
---------------	------------------

Material Data

Weight	5 g
--------	-----

Environmental requirements

Ambient temperature (operation at U_N)	-30 ... +80 °C
Ambient temperature (storage)	-40 ... +100 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
---------------	--------------------------

Subject to changes. Please also observe the further product documentation!




eCl@ss 10.0	27-26-15-03
eCl@ss 9.0	27-26-15-03
ETIM 8.0	EC001504
ETIM 7.0	EC001504
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454997625
Customs tariff number	85365005000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 508	E340707

Downloads

Documentation

Bid Text

857-162 X81 - Datei	2019 Feb 19	xml 3.5 kB	Download
857-162 doc - Datei	2018 Nov 29	doc 26.6 kB	Download

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

CAD/CAE-Data

CAE data

EPLAN Data Portal 857-162	URL	Download
WSCAD Universe 857-162	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 857-162	URL	Download
--	---------------------	--------------------------

Basic solid-state relay; Nominal input voltage: 60 VDC; Output voltage range: 0 ... 24 VDC; Limiting continuous current: 3 A

Installation Notes

Installation



Removing a relay via ejector.

Subject to changes. Please also observe the further product documentation!