


Data sheet | Item number: 706-3340/303-200

System cable; for Schneider Modicon M340; 2x 8 digital inputs or outputs;  
Length: 2 m; Conductor cross-section: 0.14 mm<sup>2</sup>



[www.wago.com/706-3340/303-200](http://www.wago.com/706-3340/303-200)

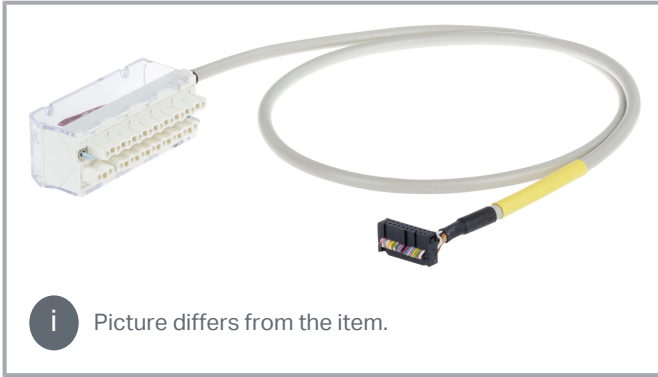

Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-7		10 poles flat connector		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	IN0.0	1	IN0
Brown		2	IN0.1	2	IN1
Green		3	IN0.2	3	IN2
Yellow		4	IN0.3	4	IN3
Grey		5	IN0.4	5	IN4
Pink		6	IN0.5	6	IN5
Blue		7	IN0.6	7	IN6
Red		8	IN0.7	8	IN7
Black		9	+24V	10	+
Violet		10	0V	9	-

Color coding acc. to DIN VDE 47100 Cable 2; Channel 0-7		10 poles flat connector		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	OUT0	11	OUT0
Brown		2	OUT1	12	OUT1
Green		3	OUT2	13	OUT2
Yellow		4	OUT3	14	OUT3
Grey		5	OUT4	15	OUT4
Pink		6	OUT5	16	OUT5
Blue		7	OUT6	17	OUT6
Red		8	OUT7	18	OUT7
Black		9	+24V	20	+
Violet		10	0V	19	-

Data  
Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Electrical data

Inputs/outputs	2 x 8 analog inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

## Compatibility

### Schneider

Schneider Modicon M340	BMX DDM 16022
------------------------	---------------

## Connection data

Cable type	LIYY
Color code	per DIN VDE 47100

### Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	10
Connection type 1	System
Wire cross-section	0.14 mm <sup>2</sup>

### Connection 2

Connector 2	Pluggable connector per DIN 41651; female connector
Pole number 2	10
Connection type 2	System

### Connection 3

Connector 3	Schneider BMXFTB2020
Pole number 3	20
Connection type 3	System

## Physical data

Cable length	2 m
--------------	-----

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Material Data

Weight	262 g
--------	-------

## Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

## Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	FR
GTIN	4055143678537
Customs tariff number	85444290900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Downloads

### Documentation

#### System Description

WAGO System Wiring, Selection Guide This guide will help you select the appropriate interface modules and system cables for the controller you are using.	pdf 545.9 kB	Download
--	-----------------	----------

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 706-3340/303-200 System cable; for Schneider Modicon M340; 2x 8 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm <sup>2</sup>	URL	Download
---	-----	----------

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.