

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014033	MiniFitJrPIg SR PnlMnt V-0 3Ckt	1	PC
B	39000095	MiniFit Term Crp Male C Bs Au 16awg	3	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

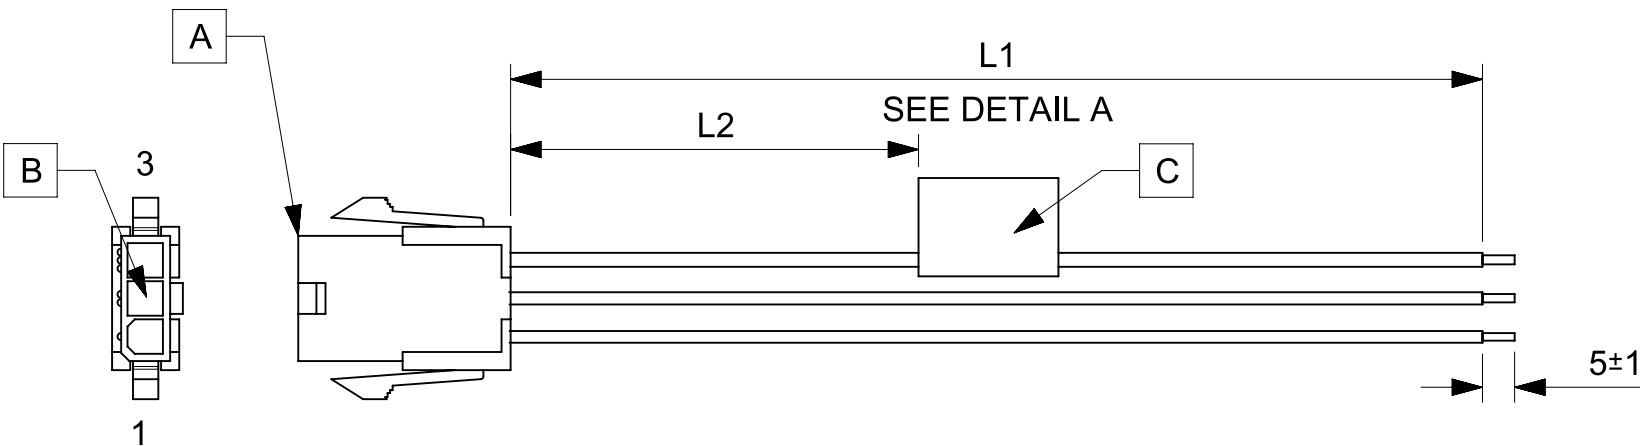


TABLE			
PART NUMBER	L1	L2	TITLE
2153232031	150±8	63 REF	MINIFIT JR SR M-S 3 CIRCUIT 150MM Au
2153232032	300±10	138 REF	MINIFIT JR SR M-S 3 CIRCUIT 300MM Au
2153232033	600±10	288 REF	MINIFIT JR SR M-S 3 CIRCUIT 600MM Au

- NOTES**
- Connector view shown is from mating side.
 - Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 - Label text must be 2mm max. in height with Arial font.
 - Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex			
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)					
	mm	NTS	ANGULAR TOL ± °					
	4 PLACES ±		EC NO: 638380					
DIVISIONAL SYMBOLS	3 PLACES ±		DRWN: AS20 2020/03/23		SEE TABLE			
	2 PLACES ±		CHK'D: RDESAI01 2020/05/28					
	1 PLACE ±		APPR: RDESAI01 2020/05/28					
	0 PLACES ±		INITIAL REVISION:					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
			A4-SIZE	215323	2153232031	PSD	000	A