


TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X	±0.25					
.XX	±0.13					
.XXX	±0.05					

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

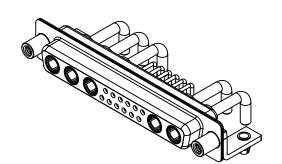

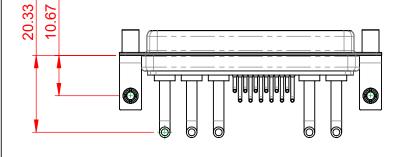

COMBINATION D-SUB




EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 630 C	COMBO ASSEMBLY				
	DRAWN: C.B	DATE: JAN. 01/2019				
	CHECKED:	DATE:				
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2				
ĺ	DRAWING NUMBER: 630-17W5650-2N5					

DRAWING NUMBER: 03U-17 VV 202U-ZIV2 PART NUMBER: 630-17W5650-2N5



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

00 2W2

2WK2

o€:

5W1

00000 3W3

0000) 3WK3





11W1

00000 5W5






13W3










17W5








00*******00


21W4











47W1

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 630 COMBO ASSEMBLY						
DRAWN: C.B		DATE:	JAN.	01/20	19	
CHECKED:		DATE:				
SCALE: N.T.S		SHEET	2	OF	2	
DRAWING NUMBER: 630-17W5650-2N5		ISSUE				

PART NUMBER:

630-17W5650-2N5

COMPLIANT