



DEUTSCH | STRIKE

TE Internal #: SRK02-MDA-32A-001

Housing for Male Terminals, Wire-to-Wire, 32 Position, .118 in / .134 in / .24 in [3 mm / 6.1 mm / 3.4 mm] Centerline, Sealable, Black, STRIKE

[View on TE.com >](#)

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH Strike Housings



Connector & Housing Type: **Housing for Male Terminals**

Mating Pin Diameter: 1.02 mm, 1.59 mm [ .04 in, .063 in ]

Connector System: **Wire-to-Wire**

Number of Positions: **32**

Centerline (Pitch): 3 mm, 3.4 mm, 5.8 mm, 6.1 mm [ .118 in, .134 in, .228 in, .24 in ]

[All DEUTSCH Strike Housings \(20\)](#)

## Features

### Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

### Configuration Features

Number of Positions	32
Number of Rows	4

### Electrical Characteristics

Operating Voltage	48 VAC
Nominal Voltage Architecture	12 V, 24 V

### Body Features

Cable Exit Angle	180°
Primary Product Color	Black



Connector & Keying Code	A
-------------------------	---

### Contact Features

Contact Size	Size 16, Size 20
--------------	------------------

Contact Type	Pin
--------------	-----

Mating Pin Diameter	1.02 mm, 1.59 mm [.04 in] [.063 in]
---------------------	-------------------------------------

Contact Current Rating (Max)	7.5 A, 13 A
------------------------------	-------------

### Mechanical Attachment

Terminal Position Assurance	Yes
-----------------------------	-----

Strain Relief	With
---------------	------

Mating Alignment Type	Keyed
-----------------------	-------

Mating Alignment	With
------------------	------

Connector Mounting Type	Panel Mount
-------------------------	-------------

### Housing Features

Housing Material	PBT
------------------	-----

Centerline (Pitch)	3 mm, 3.4 mm, 5.8 mm, 6.1 mm [.118 in] [.134 in] [.228 in] [.24 in]
--------------------	---

### Dimensions

Connector Height	40 mm [1.575 in]
------------------	------------------

Product Width	82 mm [3.228 in]
---------------	------------------

Product Length	56 mm [2.205 in]
----------------	------------------

Row-to-Row Spacing	10.85 mm, 11.35 mm, 3.5 mm [.138 in] [.427 in] [.447 in]
--------------------	--

Accepts Insulation Diameter Range	1.55 – 2.41 mm, 1.55 – 3.05 mm [.061 – .095 in] [.061 – .12 in]
-----------------------------------	---

### Usage Conditions

Operating Temperature (Max)	125 °C [257 °F]
-----------------------------	-----------------

Operating Temperature Range	-55 – 125 °C [-67 – 257 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

### Industry Standards

Degree of Protection	IP68, IP6K9K
----------------------	--------------

Agency/Standard	SAE J2030
-----------------	-----------

UL Flammability Rating	Not tested
------------------------	------------



## Packaging Features

Packaging Quantity	108
Packaging Method	Box

## Other

Serviceable	Yes
Connector Position Assurance Capable	No

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Pb (.11% in Component Part) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # CAT-D48-SP729  
DEUTSCH Sealing Plugs



TE Part # CAT-D48-ST273  
DEUTSCH Solid Contacts



TE Part # DT-RT1  
EXT TOOL, FRONT RELEASE



TE Part # SRK-BS-MD-90-001  
BKSHL, MED, BLK, RA, NW 17/22



TE Part # SRK-BS-MD-ST-001  
BKSHL, MED, BLK, ST, NW 17/22



TE Part # CAT-J67-DSCC16  
DEUTSCH Size 16 Crimp Contacts



TE Part # 1060-20-0622  
PIN, SF, SIZE 20, 14-16, NI/NI



TE Part # 1060-20-0144  
PIN, SF, SIZE 20, 16-22, AU/SN



TE Part # 1060-20-0222  
PIN, SF, SIZE 20, 16-22, NI/NI



TE Part # 1060-20-0122  
PIN, SF, SIZE 20, 16-22, NI/NI



TE Part # 1060-20-0244  
PIN, SF, SIZE 20, 16-22, AU/SN



TE Part # 2300908-1  
0460-003-16329, PIN, SOLID, 20-24AWG, AU



TE Part # 1060-20-0177  
PIN, SF, SIZE 20, 16-22, SN/SN




TE Part # 1060-20-0277  
PIN, SF, SIZE 20, 16-22, SN/SN




TE Part # SRK-BS-MD-90-002  
BKSHL, MED, BLK, RA, NW 22



TE Part # SRK-BS-MD-ST-002  
BKSHL, MED, BLK, ST, NW 22



TE Part # CAT-D48-SFT273  
DEUTSCH Stamped and Formed Contacts




TE Part # SRK-MT-02  
SRK TPA MOUNTING TOOL recpt

Also in the Series | STRIKE



Automotive Housings(20)

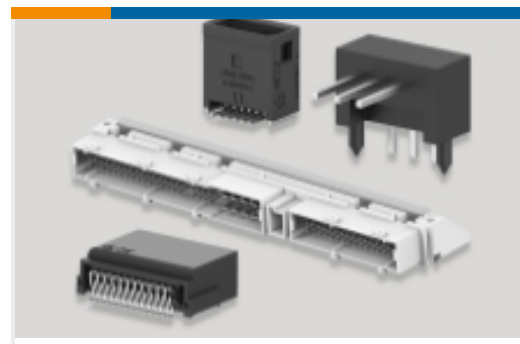

PCB Headers & Receptacles(9)

## Customers Also Bought



TE Part #HD36-18-20SN-059  
DEUTSCH HD30 Housings



TE Part #1-1419168-1  
MARKET 1X6 FEMALE SEALED



TE Part #9-1437652-5  
6PCV-06-006=6PCV ASSEMBLY



TE Part #8-33458-2  
TERM,SOLIS R 12-10 1/4




TE Part #SRK-BS-MD-ST-001  
BKSHL, MED, BLK, ST, NW 17/22



TE Part #776433-3  
AS 16, 6P PLUG ASSY, KEY 3



TE Part #SRK02-MDB-32A-001  
REC, 32P, BLK, E, FLANGE, B

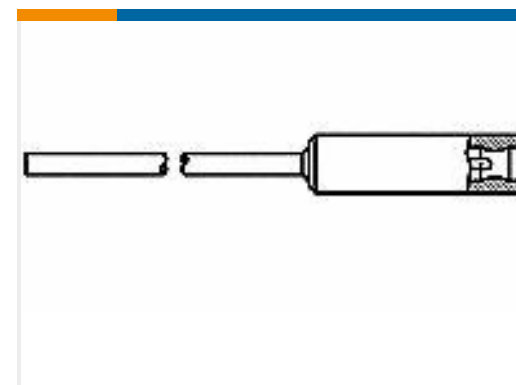

TE Part #1218148-1  
LGH,MICRO-MIN,RCPT,ASSY,170SER



TE Part #NB3273-000  
ES2000-NO.2-B9-0-COIL

## Documents

### Product Drawings

[REC, 32P, BLK, E, FLANGE, A](#)

English

### CAD Files

[3D PDF](#)

3D

### Customer View Model

[ENG\\_CVM\\_CVM\\_SRK02-MDA-32A-001\\_C.2d\\_dxf.zip](#)





English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_SRK02-MDA-32A-001\\_C.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_SRK02-MDA-32A-001\\_C.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

**Product Specifications**

[Application Specification](#)

English