
Mounting Option


07-M3-0.5 Metric Threaded Inserts

Contact Detail

524-P.C. Tail .018 Sq.(0.46 Sq.) - Tail LG=.175(4.45)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

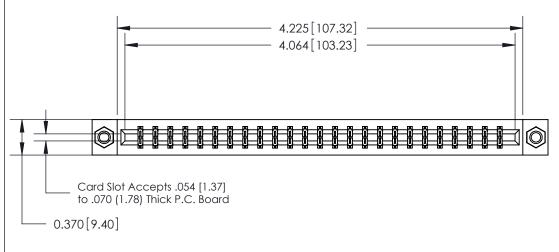

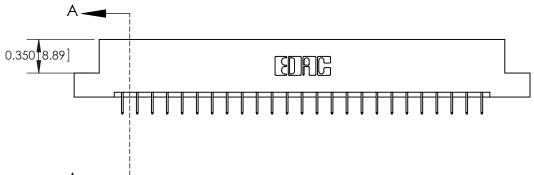

0.388 [9.86] Card Slot .160 [4.06] Point of Contact-

See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

| 333 Series Card Edge Connector |
|--------------------------------|
| Part Number: 333-050-524-207 |



| $\overline{}$ | | |
|---------------|-------------------|------------------|
| | ACAD REFERENCE NO | . 333 ENG MASTER |
| | DRAWN: J.LEE | DATE: OCT. 14/09 |
| | CHECKED: | DATE: |
| | SCALE: NTS | SHEET 1 OF 4 |
| 0 | DRAWING NUMBER | ISSUE |

SECTION A-A

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



| 333 Series Card Edge Conn | ACAD REFERENCE NO. 333 ENG MASTER | | | |
|--------------------------------------|---|------------------|---------|--------|
| Contact Bend Detail | DRAWN: J.LEE | DATE: OCT. 14/09 | | |
| Confact Bend Defail | CHECKED: | DATE: | | |
| 1 / 11 / 11/ 1 | | SCALE: NTS | SHEET : | 2 OF 4 |
| | TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER | | ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS | | | 1 |

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

ORIGINAL

1



| 333 Series Card Edge Connector | | | ACAD REFERENCE NO. 333 ENG MASTER | | |
|--------------------------------------|--|---------|-----------------------------------|---------|-----------|
| Mounting Options | | DRAWN: | J.LEE | DATE: O | CT. 14/09 |
| | | CHECKED |): | DATE: | |
| EDAC INC | THESE DRAWINGS AND SPECIFICATIONS | SCALE: | NTS | SHEET : | 3 OF 4 |
| TORONTO, ONTARIO | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING | NUMBER | | ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS | 3 | 33 Assembly | | 1 |

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector | ACAD REFERENCE NO. 333 ENG MASTER |
|--|--|
| Features and Specifications | DRAWN: J.LEE DATE: OCT. 14/09 |
| redictes and specifications | CHECKED: DATE: |
| EDAC INC THESE DRAWINGS AND ARE THE PROPERTY OF | |
| IORONIO, ONIARIO SHALL NOT BE REPRO | DDUCED, OR COPIED DRAWING NUMBER ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PER | LE OF APPARATUS 333 Accombly 1 |