

- ORDERING INFO:
 EX. ORDER NUMBER: RH1034 XXX XX G NL
 1 2 3 4 5
- SERIES NO.
 - COLOR: SEE TABLE
 - SEE SCHEMATIC
 - BARREL GOLD PLATED=G
 - ROHS COMPLIANT "NL"

- NOTES:
- PLASTIC HOUSING & INSERT: PBT 94V-0
 - SOLDERING TEMP.: 260-250°C FOR 5-11 SECOND

COLOR TABLE:

SERIES No.	30B	30W	30Y	30R	30U	30G	30O
COLOR	BLACK	WHITE	YELLOW	RED	BLUE	GREEN	ORANGE

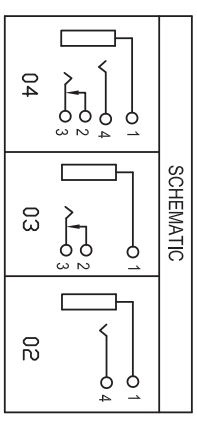
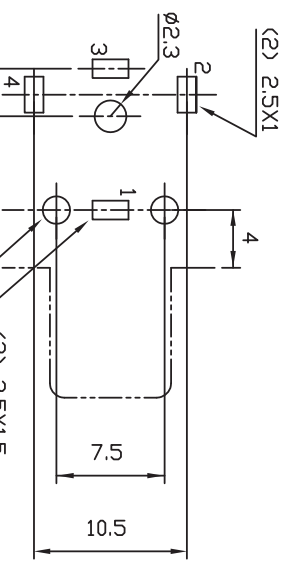


TABLE:

UNLESS OTHERWISE NOTED, TOLERANCE AS FOLLOWS:	
DIMENSIONS	TOL.
0-5	±0.1
5-20	±0.2
>20	±0.3

PCB LAYOUT

NOTE: ALL DIMS ARE GIVEN IN MM.

ITEM	PART NAME	QTY	MATERIAL	PLATING & COLOR
5	HOUSING	1	PBT 94V-0	
4	TERMINAL	1	H66 BRASS STRIP, ±0.45	D. Ag
3	TIP SPRING	1	OSn6.5-0.1 PHOSPHOR BRONZE, ±0.4	D. Ag
2	CONTACT	1	OSn6.5-0.1 PHOSPHOR BRONZE, ±0.5	D. CuSn
1	BUSHING	1	H66 BRASS STRIP, ±0.4	D. CuSn



RDI Research • Development • Innovation
 RDI, Inc. • 400 Columbus Avenue • Valhalla, NY 10595

SCALE	TITLE
NONE	RCA JACK-ROHS COMPLIANT

TOLERANCE	DR	DATE	REF.
EXCEPT AS NOTED	JY	05/06/07	P/N: RH1034XXXXXGNL

DEC. INCHES	CK	PRE-	DRAWING NO.	SIZE	REV.
N/A	Bill	JK	3197	A	B

THIS DOCUMENT IS OWNED BY, AND THE INFORMATION CONTAINED IN IT IS PROPRIETARY TO, RDI. BY RECEIPT HEREOF THE HOLDER AGREES NOT TO USE THE INFORMATION AND NOT TO DISCLOSE IT TO ANY THIRD PARTY, NOR REPRODUCE THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF RDI, AND AGREES TO RETURN THIS DOCUMENT FORTHWITH UPON REQUEST.

ECN#	DATE	SYM	REVISION RECORD
08-269	07/22/08	B	ADDED DRANGE TO THE COLOR TABLE
07-463	10/09/07	A	ADDED GREEN & BLUE COLOR TO THE COLOR TABLE
			REVISION RECORD

DEC. MILLIMETERS	ANG.
0°-0.5°	