

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334812201	MX150 ASSY 1.5 BLD 1X2 BLK A/2	2	PC
C	330001001	MX150 BLD TERM TIN 14AWG D WIND	4	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

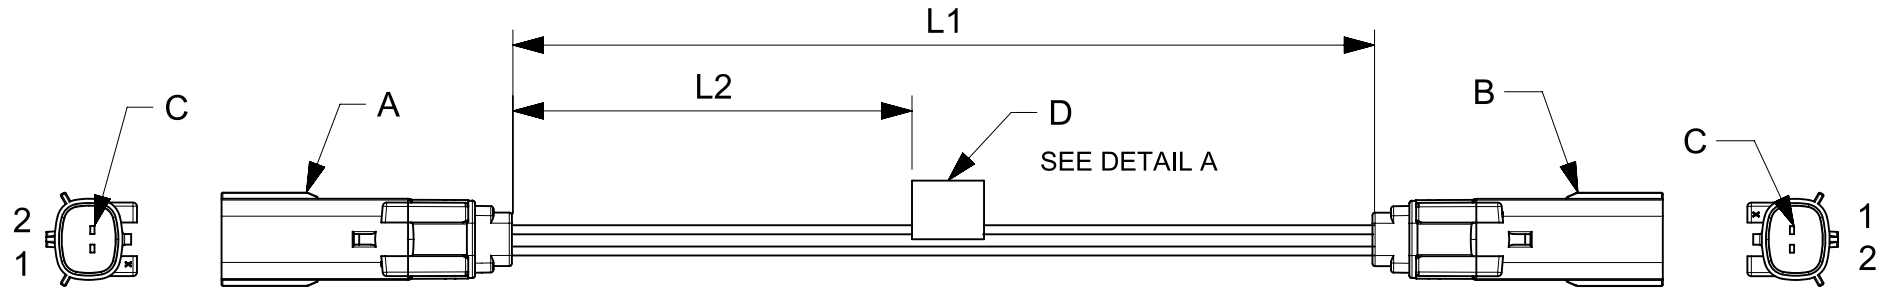


TABLE			
PART NUMBER	L1	L2	TITLE
2162821021	150±8	63 REF	MX150 P-P SR 2ckt 150mm Sn sealed cable
2162821022	300±10	138 REF	MX150 P-P SR 2ckt 300mm Sn sealed cable
2162821023	600±10	288 REF	MX150 P-P SR 2ckt 600mm Sn sealed cable

NOTES

1. Connector assembly must pass 100% continuity and polarity test.
2. Sealing must pass the IP67 rating as defined by product specification.
3. Connector view shown is from mating side.
4. Label text must be 2mm max. in height with Arial font.
5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>	
	DIMENSION UNITS	SCALE	EC NO: 717106			DOCUMENT NUMBER
	mm	NTS	DRWN: SAIKIG 2022/05/23			DOC TYPE
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SKUMAR07 2022/09/14			DOC PART
ANGULAR TOL ± °		APPR: SKUMAR07 2022/09/14		REVISION		
4 PLACES ±		INITIAL REVISION:		2162821021		
3 PLACES ±		DRWN: NNANKOLA 2020/06/29		PSD		
2 PLACES ±		APPR: SD 2020/08/31		000		
1 PLACE ±		MATERIAL NUMBER		B		
0 PLACES ±		CUSTOMER		1 OF 1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	SHEET NUMBER	
			A4-SIZE	216282		