



## ERP610W330MDRT

Aliases (C831DR330M760H, ERP610VH2330MDRT)

Obsolete

ERP610 SFTY X1-760 Y1-500, Ceramic, 33 pF, 20%, 760 VAC (X1), 500 VAC (Y1), U2J, Lead Spacing = 10mm

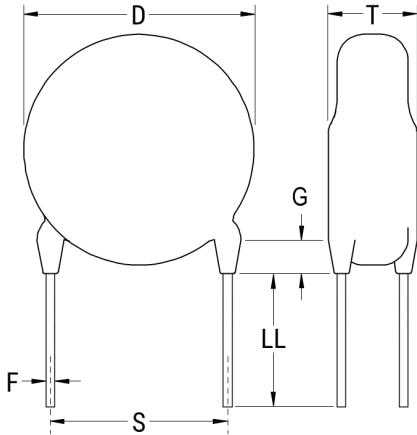

The measurement position of Lead Spacing (S) and Width (V) is critical in straight lead capacitors.

Click [here](#) for the 3D model.

### Dimensions

|   |                 |
|---|-----------------|
| D | 8mm MAX         |
| H | 16.5mm +/-0.5mm |
| T | 6mm MAX         |
| S | 10mm +/-0.8mm   |
| F | 0.6mm +/-0.05mm |
| G | 3mm MAX         |
| V | 1.9mm +/-0.5mm  |

### Packaging Specifications

Packaging T&R, H = 16.5mm, Component Pitch = 25.4mm

### General Information

|                |   |
|----------------|---|
| Series         | ERP610 SFTY X1-760 Y1-500   |
| Style          | Radial Disc   |
| Description    | Ceramic Single Layer Safety Disc Capacitors   |
| RoHS           | Yes   |
| Termination    | Tin   |
| Qualifications | UL, CSA, CAN, ENEC, VDE   |
| AEC-Q200       | No  |
| Notes          | Please See Bulletin For Taping Information. H Dimension Refers to Seating Plane To Center Hole of Tape. |

### Specifications

|                         |                            |
|-------------------------|----------------------------|
| Capacitance             | 33 pF                      |
| Capacitance Tolerance   | 20%                        |
| Voltage AC              | 760 VAC (X1), 500 VAC (Y1) |
| Temperature Range       | -40/+125°C                 |
| Temperature Coefficient | U2J                        |
| Dissipation Factor      | 5%                         |
| Insulation Resistance   | 10 GOhms                   |
| Safety Class            | X1/Y1                      |