

## SUMMARY



Image is for illustrative purpose only

### # Wires

|         |   |
|---------|---|
| Low     | 0 |
| High    | 0 |
| Coax    | 1 |
| Triax   | 0 |
| Quad    | 0 |
| Fiber   | 0 |
| Fluidic | 0 |

### Download

[Request a quote](#)

[Catalog](#)

|                  |                        |
|------------------|------------------------|
| Series           | 00                     |
| Termination type | Coupler/adapter/bridge |
| IP rating        | 50                     |
| Cable Ø          | 0.00 - 0.00 mm         |
| Status           | active                 |
| Alternative part |                        |

## TECHNICAL DETAILS

### Mechanics

|                   |   |
|-------------------|---|
| Shell Style/Model | FTY*: Straight plug with two parallel receptacles   |
| Keying            | Circular (can rotate)   |
| Housing Material  | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Variant           |   |
| Weight            | 14.14 g   |

### Performance

|               |                          |
|---------------|--------------------------|
| Configuration | 00.250 : 1 Coax (50 Ohm) |
| Insulator     | T: PTFE                  |
| Rated Current | 4 Amps                   |

### Specifications

Contact Type: Coaxial 50 Ohm  
Test voltage: 1.1 kV (rms)

### Others

Endurance (Shell): 5000 mating cycles


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

F ret (min): 100 N  
Salt Spray Corrosion: >1000 hr  
IP Rating: 50

---

## DRAWINGS

### Draws

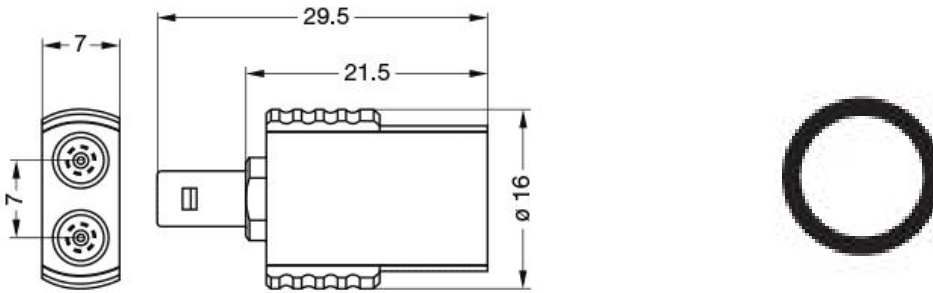

### Dimensions

|     | A    | L    |
|-----|------|------|
| mm. | 7    | 29.5 |
| in. | 0,28 | 1,16 |

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*